




PROTEZIONE CIVILE
Presidenza del Consiglio dei Ministri
Dipartimento della Protezione Civile



Regione Emilia Romagna



CONFERENZA DELLE REGIONI E
DELLE PROVINCE AUTONOME

Attuazione dell'articolo 11 dalla legge 24 giugno 2009, n.77

MICROZONAZIONE SISMICA

Report delle indagini

Regione Emilia–Romagna

Comune di Malalbergo








Regione	Soggetto realizzatore	Data
EMILIA–ROMAGNA	Dott. Geologo Samuel Sangiorgi	Agosto 2018

Studio Samuel Sangiorgi
 Via Valsellustra 32, 40060 - Dozza (BO)
 info@studiosamuelsangiorgi.eu
 Tel. 0542-640279

Project: Microzonazione Sismica Malalbergo
Location: Casoni

CPT: CPTU1
 Total depth: 13.00 m

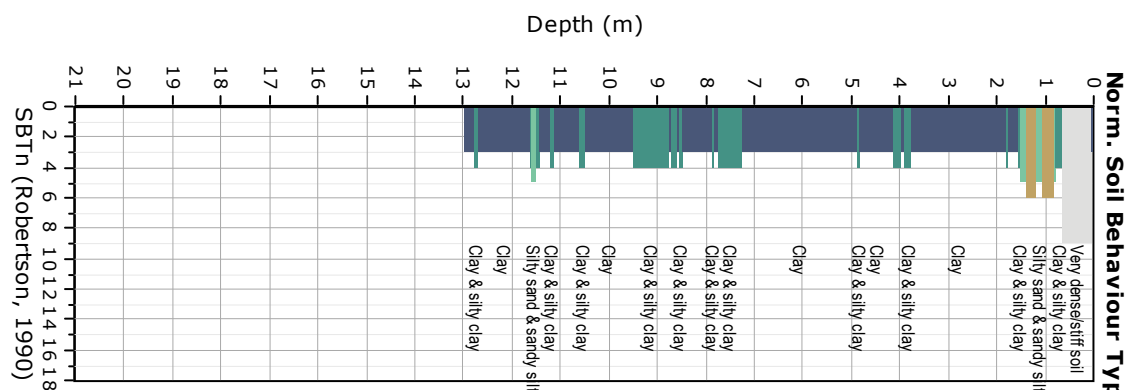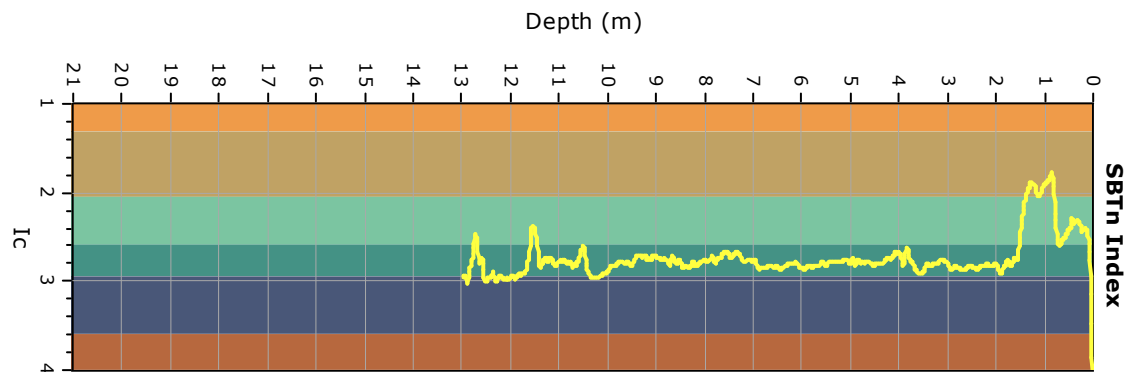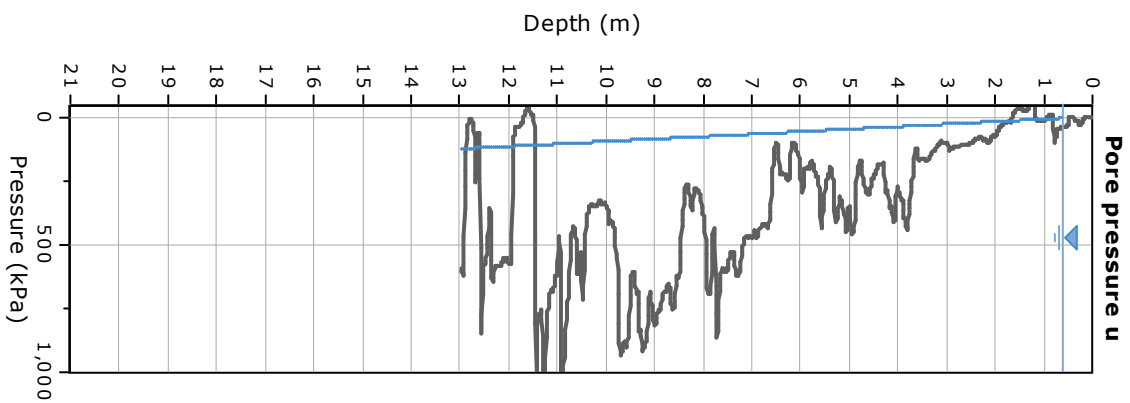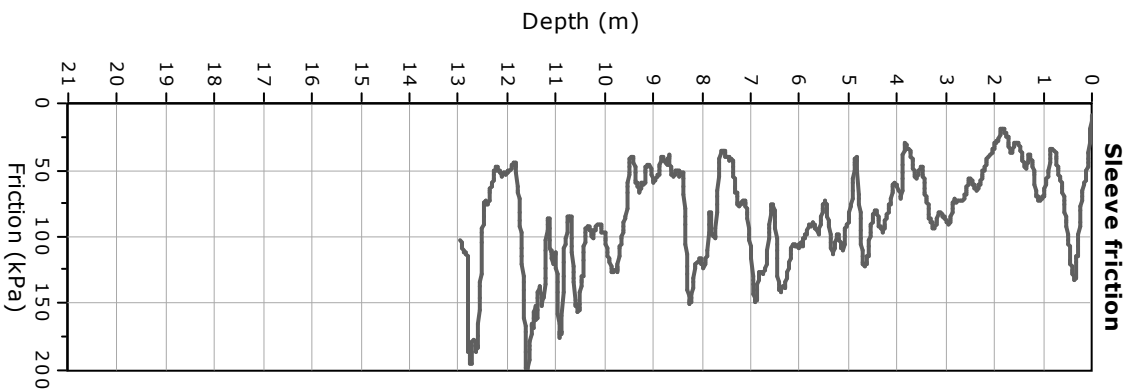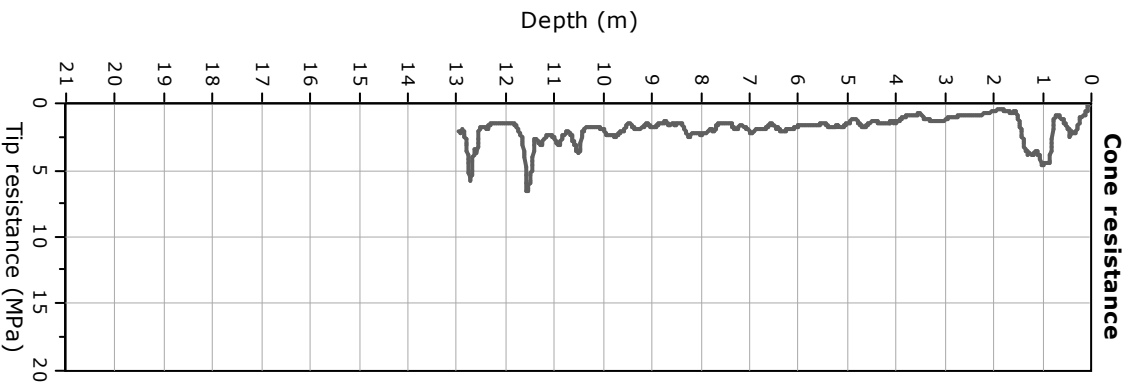

MALALBERGO_MS, MS 2018 TR6

037035P201HVSR249

Instrument: TRZ-0108/01-10

Start recording: 09/03/18 10:19:23 End recording: 09/03/18 11:19:23

Channel labels: NORTH SOUTH; EAST WEST ; UP DOWN

Trace length: 1h00'00". Analysis performed on the entire trace.

Sampling rate: 128 Hz


Window size: 60 s

Smoothing type: Triangular window


Smoothing: 10%

HORIZONTAL TO VERTICAL SPECTRAL RATIO


Max. H/V at 0.86 ± 0.03 Hz. (In the range 0.1 - 20.0 Hz).

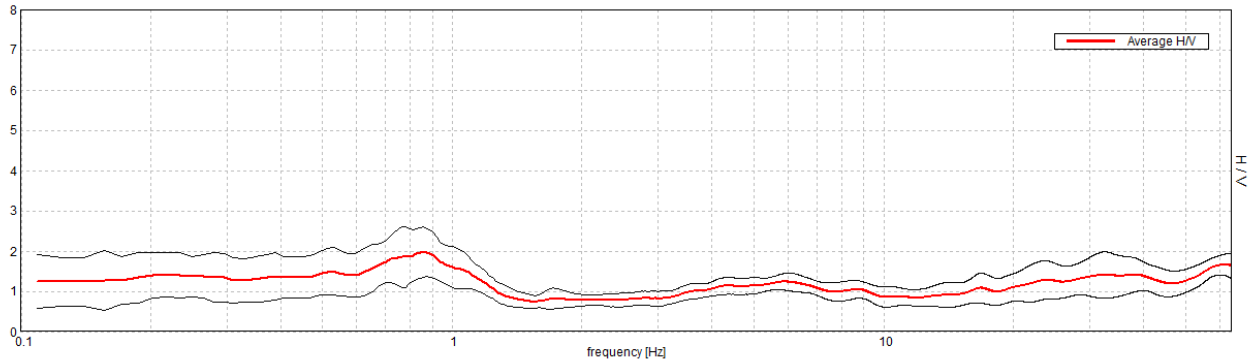


H/V TIME HISTORY

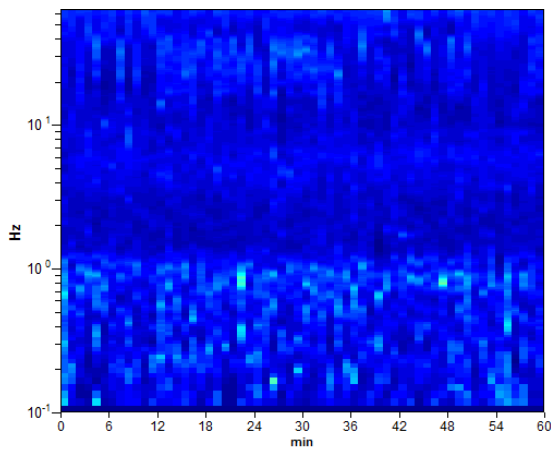

DIRECTIONAL H/V

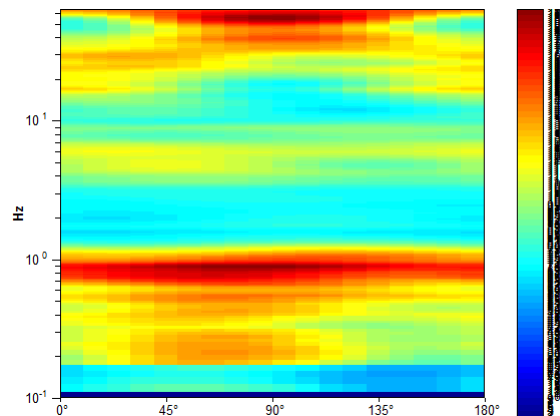

SINGLE COMPONENT SPECTRA

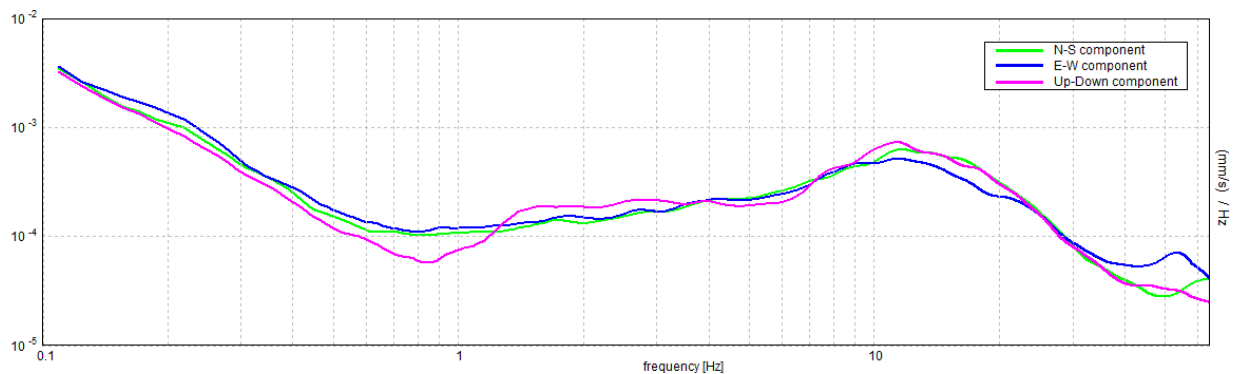

[According to the SESAME, 2005 guidelines. Please read carefully the *Grilla* manual before interpreting the following tables.]

Max. H/V at 0.86 ± 0.03 Hz (in the range 0.1 - 20.0 Hz).

Criteria for a reliable H/V curve

[All 3 should be fulfilled]

$f_0 > 10 / L_w$	$0.86 > 0.17$	OK	
$n_c(f_0) > 200$	$3093.8 > 200$	OK	
$\sigma_A(f) < 2$ for $0.5f_0 < f < 2f_0$ if $f_0 > 0.5\text{Hz}$ $\sigma_A(f) < 3$ for $0.5f_0 < f < 2f_0$ if $f_0 < 0.5\text{Hz}$	Exceeded 0 out of 84 times	OK	

Criteria for a clear H/V peak

[At least 5 out of 6 should be fulfilled]

Exists f^- in $[f_0/4, f_0] \mid A_{H/V}(f^-) < A_0 / 2$			NO
Exists f^+ in $[f_0, 4f_0] \mid A_{H/V}(f^+) < A_0 / 2$	1.281 Hz	OK	
$A_0 > 2$	$1.97 > 2$		NO
$f_{\text{peak}}[A_{H/V}(f) \pm \sigma_A(f)] = f_0 \pm 5\%$	$ 0.01473 < 0.05$	OK	
$\sigma_f < \varepsilon(f_0)$	$0.01266 < 0.12891$	OK	
$\sigma_A(f_0) < \theta(f_0)$	$0.3072 < 2.0$	OK	

L_w	window length
n_w	number of windows used in the analysis
$n_c = L_w n_w f_0$	number of significant cycles
f	current frequency
f_0	H/V peak frequency
σ_f	standard deviation of H/V peak frequency
$\varepsilon(f_0)$	threshold value for the stability condition $\sigma_f < \varepsilon(f_0)$
A_0	H/V peak amplitude at frequency f_0
$A_{H/V}(f)$	H/V curve amplitude at frequency f
f^-	frequency between $f_0/4$ and f_0 for which $A_{H/V}(f^-) < A_0/2$
f^+	frequency between f_0 and $4f_0$ for which $A_{H/V}(f^+) < A_0/2$
$\sigma_A(f)$	standard deviation of $A_{H/V}(f)$, $\sigma_A(f)$ is the factor by which the mean $A_{H/V}(f)$ curve should be multiplied or divided
$\sigma_{\log H/V}(f)$	standard deviation of $\log A_{H/V}(f)$ curve
$\theta(f_0)$	threshold value for the stability condition $\sigma_A(f) < \theta(f_0)$


Threshold values for σ_f and $\sigma_A(f_0)$

Freq. range [Hz]	< 0.2	0.2 – 0.5	0.5 – 1.0	1.0 – 2.0	> 2.0
$\varepsilon(f_0)$ [Hz]	$0.25 f_0$	$0.2 f_0$	$0.15 f_0$	$0.10 f_0$	$0.05 f_0$
$\theta(f_0)$ for $\sigma_A(f_0)$	3.0	2.5	2.0	1.78	1.58
$\log \theta(f_0)$ for $\sigma_{\log H/V}(f_0)$	0.48	0.40	0.30	0.25	0.20

Studio Samuel Sangiorgi
 Via Valsellustra 32, 40060 - Dozza (BO)
 info@studiosamuelsangiorgi.eu
 Tel: 0542-640279

Project: Microzonazione Sismica Malalbergo
Location: Via San Giovanni Battista - Altedo

CPT: CPTU2
 Total depth: 20.18 m

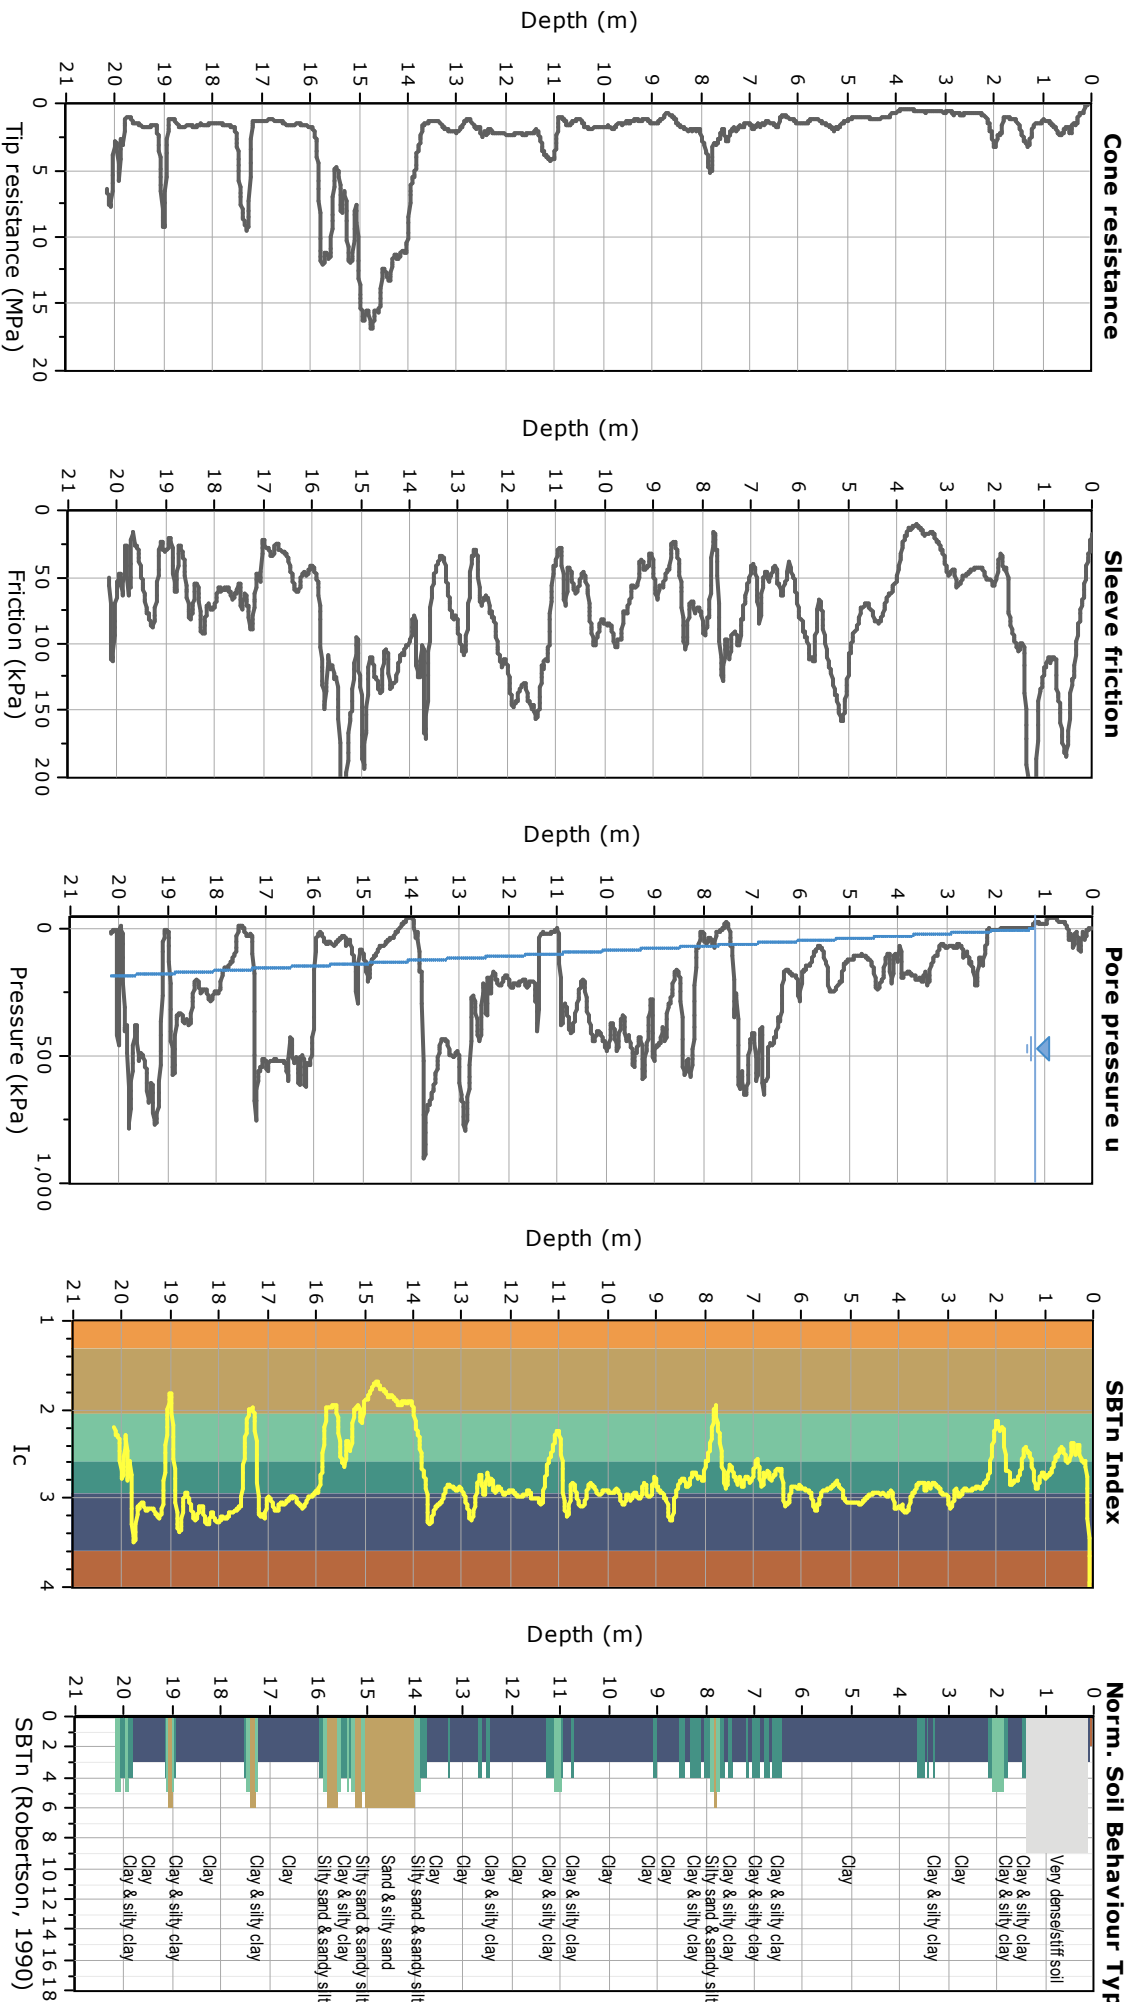

MALALBERGO_MS, MS 2018 TR3

037035P202HVS251

Instrument: TRZ-0108/01-10

Start recording: 08/02/18 11:37:45 End recording: 08/02/18 11:57:46

Channel labels: NORTH SOUTH; EAST WEST ; UP DOWN

Trace length: 0h20'00". Analyzed 53% trace (manual window selection)

Sampling rate: 128 Hz


Window size: 20 s

Smoothing type: Triangular window


Smoothing: 10%

HORIZONTAL TO VERTICAL SPECTRAL RATIO


Max. H/V at 0.59 ± 0.04 Hz (in the range 0.1 - 20.0 Hz).

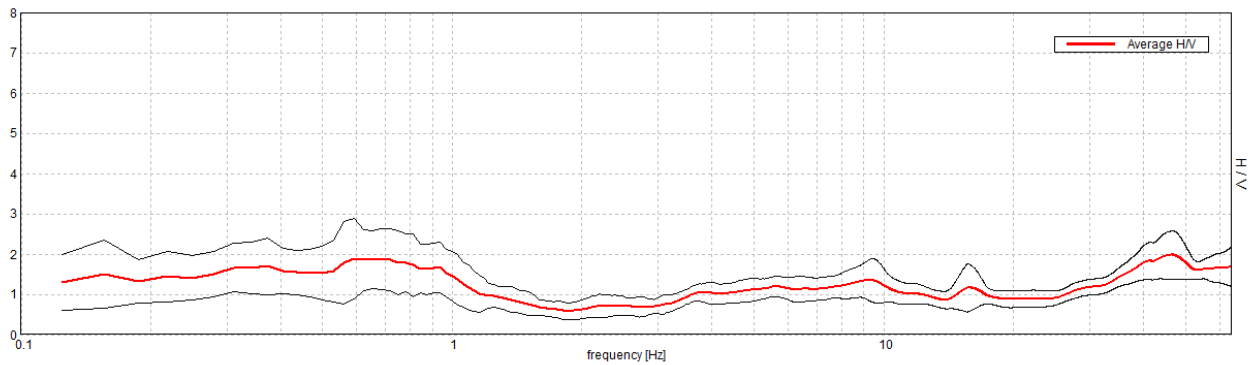


H/V TIME HISTORY

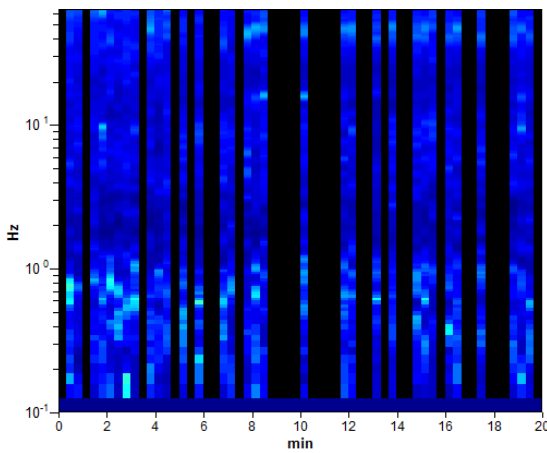

DIRECTIONAL H/V

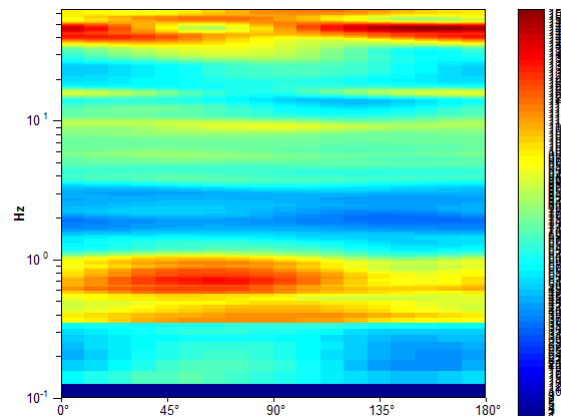

SINGLE COMPONENT SPECTRA

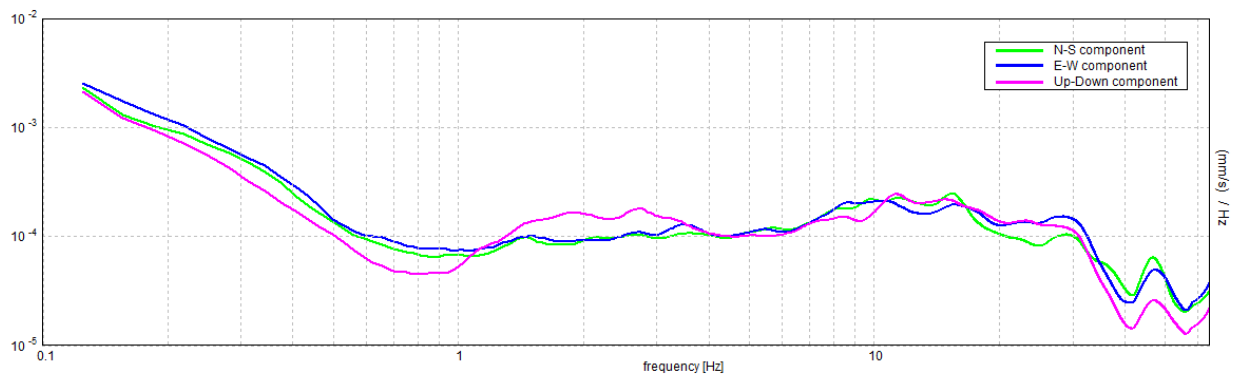

[According to the SESAME, 2005 guidelines. Please read carefully the *Grilla* manual before interpreting the following tables.]

Max. H/V at 0.59 ± 0.04 Hz (in the range 0.1 - 20.0 Hz).

Criteria for a reliable H/V curve

[All 3 should be fulfilled]

$f_0 > 10 / L_w$	$0.59 > 0.50$	OK	
$n_c(f_0) > 200$	$380.0 > 200$	OK	
$\sigma_A(f) < 2$ for $0.5f_0 < f < 2f_0$ if $f_0 > 0.5\text{Hz}$ $\sigma_A(f) < 3$ for $0.5f_0 < f < 2f_0$ if $f_0 < 0.5\text{Hz}$	Exceeded 0 out of 30 times	OK	

Criteria for a clear H/V peak

[At least 5 out of 6 should be fulfilled]

Exists f^- in $[f_0/4, f_0]$ $A_{H/V}(f^-) < A_0 / 2$			NO
Exists f^+ in $[f_0, 4f_0]$ $A_{H/V}(f^+) < A_0 / 2$	1.281 Hz	OK	
$A_0 > 2$	$1.89 > 2$		NO
$f_{\text{peak}}[A_{H/V}(f) \pm \sigma_A(f)] = f_0 \pm 5\%$	$ 0.03206 < 0.05$	OK	
$\sigma_f < \varepsilon(f_0)$	$0.01904 < 0.08906$	OK	
$\sigma_A(f_0) < \theta(f_0)$	$0.4858 < 2.0$	OK	

L_w	window length
n_w	number of windows used in the analysis
$n_c = L_w n_w f_0$	number of significant cycles
f	current frequency
f_0	H/V peak frequency
σ_f	standard deviation of H/V peak frequency
$\varepsilon(f_0)$	threshold value for the stability condition $\sigma_f < \varepsilon(f_0)$
A_0	H/V peak amplitude at frequency f_0
$A_{H/V}(f)$	H/V curve amplitude at frequency f
f^-	frequency between $f_0/4$ and f_0 for which $A_{H/V}(f^-) < A_0/2$
f^+	frequency between f_0 and $4f_0$ for which $A_{H/V}(f^+) < A_0/2$
$\sigma_A(f)$	standard deviation of $A_{H/V}(f)$, $\sigma_A(f)$ is the factor by which the mean $A_{H/V}(f)$ curve should be multiplied or divided
$\sigma_{\log H/V}(f)$	standard deviation of $\log A_{H/V}(f)$ curve
$\theta(f_0)$	threshold value for the stability condition $\sigma_A(f) < \theta(f_0)$






Threshold values for σ_f and $\sigma_A(f_0)$

Freq. range [Hz]	< 0.2	0.2 – 0.5	0.5 – 1.0	1.0 – 2.0	> 2.0
$\varepsilon(f_0)$ [Hz]	$0.25 f_0$	$0.2 f_0$	$0.15 f_0$	$0.10 f_0$	$0.05 f_0$
$\theta(f_0)$ for $\sigma_A(f_0)$	3.0	2.5	2.0	1.78	1.58
$\log \theta(f_0)$ for $\sigma_{\log H/V}(f_0)$	0.48	0.40	0.30	0.25	0.20

Studio Samuel Sangiorgi
 Via Valsellustra 32, 40060 - Dozza (BO)
 info@studiosamuelsangiorgi.eu
 Tel. 0542-640279

Project: Microzonazione Sismica Malalbergo
Location: Parco via Gardi - Altedo

CPT: CPTU3
 Total depth: 20.29 m

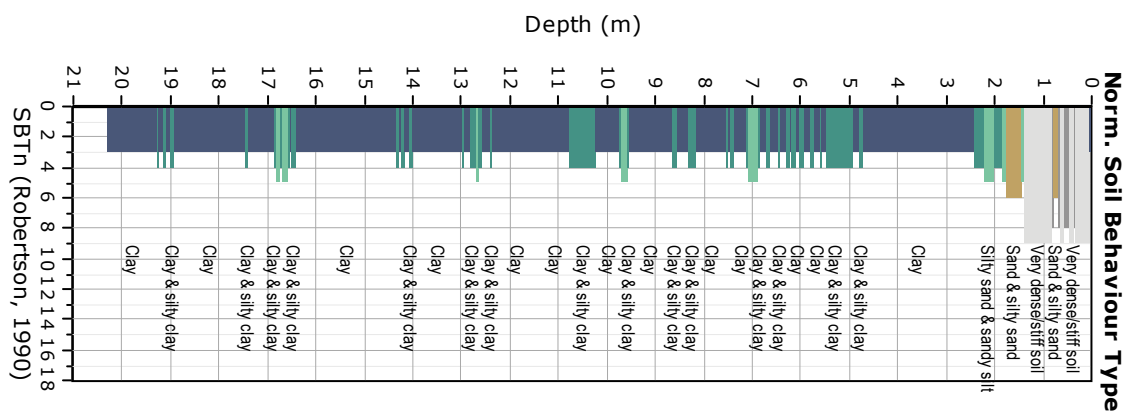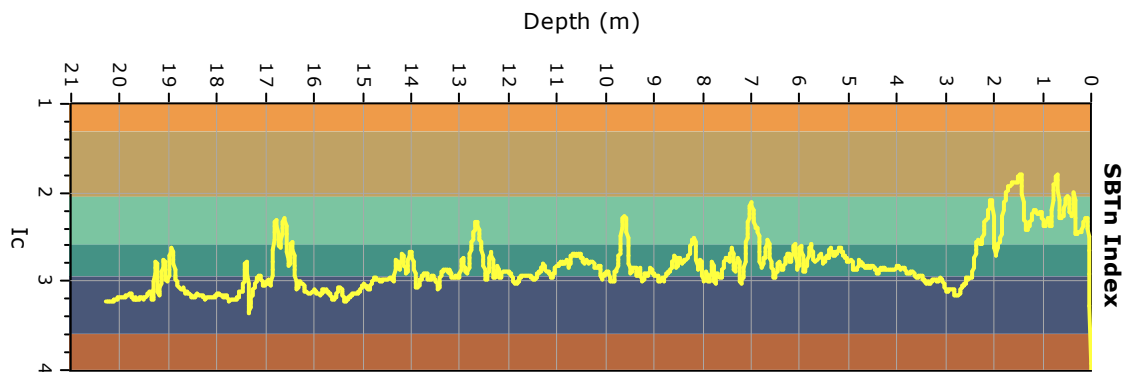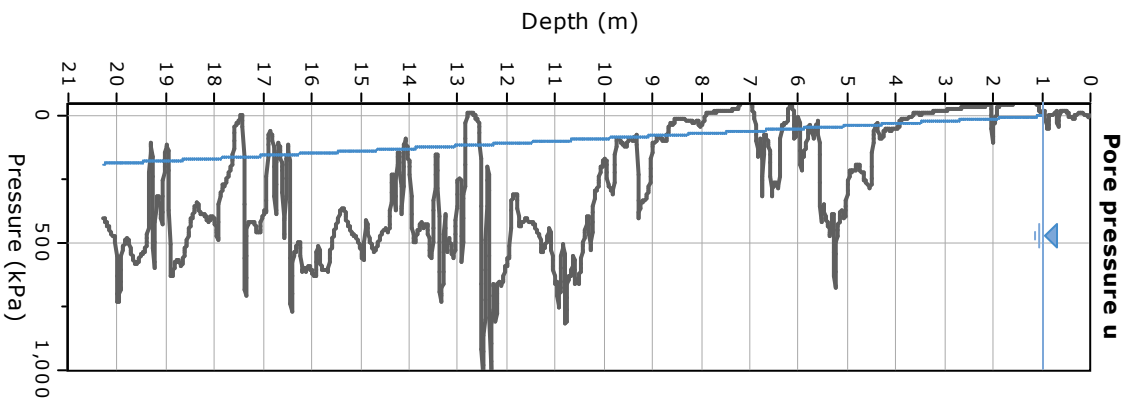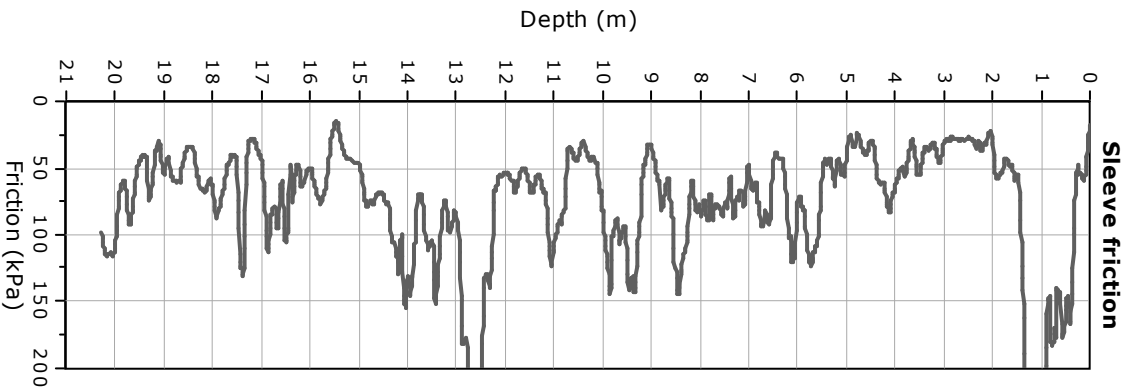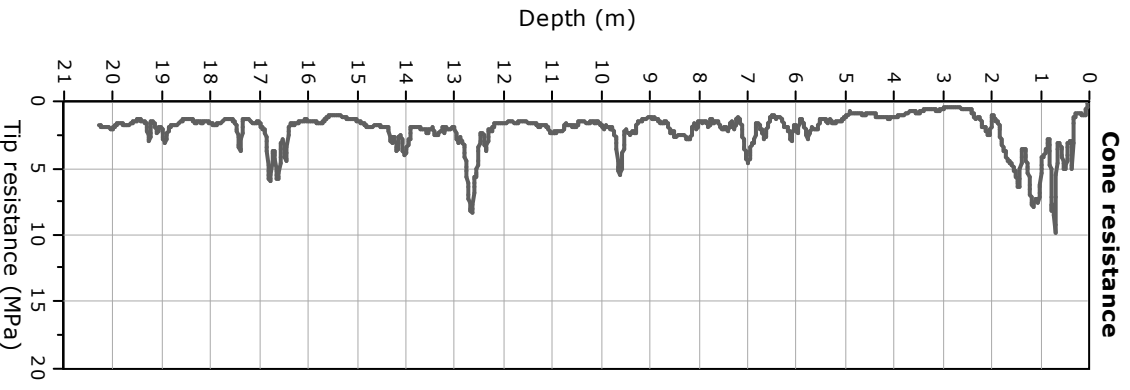

MALALBERGO_MS, MS 2018 TR4

037035P203HVSR253

Instrument: TRZ-0108/01-10

Start recording: 08/02/18 13:41:41 End recording: 08/02/18 14:01:42

Channel labels: NORTH SOUTH; EAST WEST ; UP DOWN

Trace length: 0h20'00". Analyzed 72% trace (manual window selection)

Sampling rate: 128 Hz


Window size: 20 s

Smoothing type: Triangular window


Smoothing: 10%

HORIZONTAL TO VERTICAL SPECTRAL RATIO


Max. H/V at 0.75 ± 0.07 Hz (in the range 0.1 - 20.0 Hz).

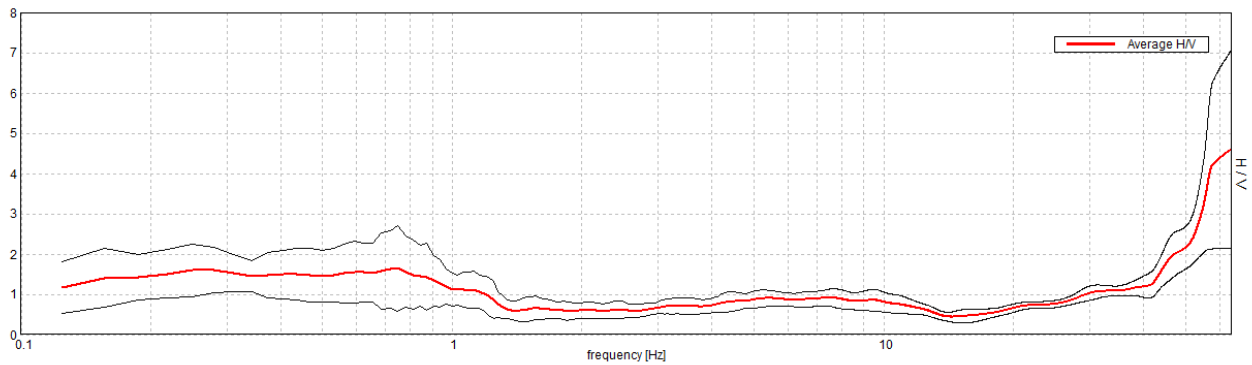


H/V TIME HISTORY

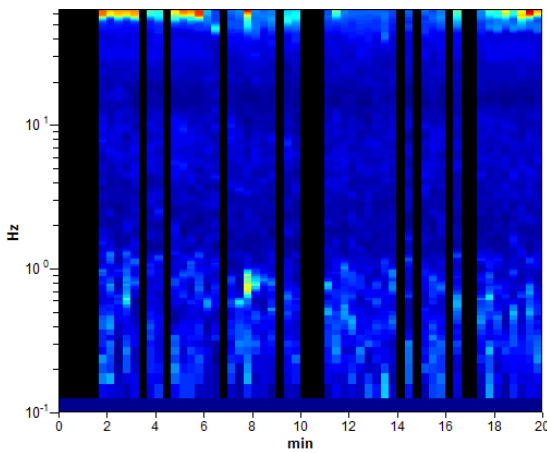

DIRECTIONAL H/V

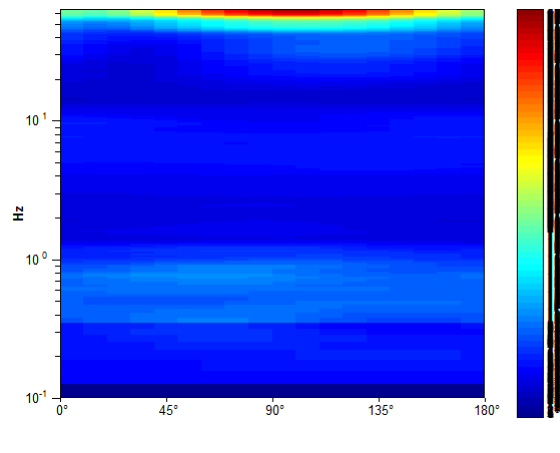

SINGLE COMPONENT SPECTRA

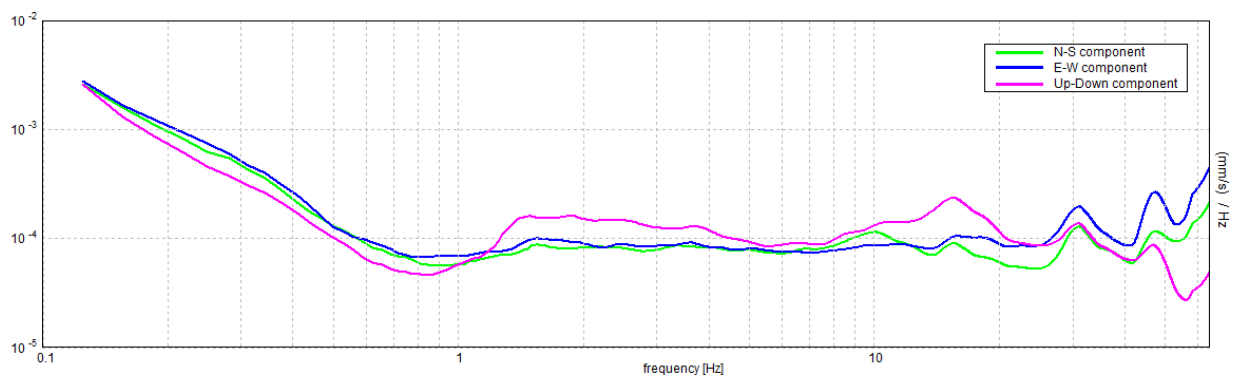

[According to the SESAME, 2005 guidelines. Please read carefully the *Grilla* manual before interpreting the following tables.]

Max. H/V at 0.75 ± 0.07 Hz (in the range 0.1 - 20.0 Hz).

Criteria for a reliable H/V curve

[All 3 should be fulfilled]

$f_0 > 10 / L_w$	$0.75 > 0.50$	OK	
$n_c(f_0) > 200$	$645.0 > 200$	OK	
$\sigma_A(f) < 2$ for $0.5f_0 < f < 2f_0$ if $f_0 > 0.5\text{Hz}$ $\sigma_A(f) < 3$ for $0.5f_0 < f < 2f_0$ if $f_0 < 0.5\text{Hz}$	Exceeded 0 out of 37 times	OK	

Criteria for a clear H/V peak

[At least 5 out of 6 should be fulfilled]

Exists f^- in $[f_0/4, f_0]$ $A_{H/V}(f^-) < A_0 / 2$			NO
Exists f^+ in $[f_0, 4f_0]$ $A_{H/V}(f^+) < A_0 / 2$	1.281 Hz	OK	
$A_0 > 2$	$1.64 > 2$		NO
$f_{\text{peak}}[A_{H/V}(f) \pm \sigma_A(f)] = f_0 \pm 5\%$	$ 0.04567 < 0.05$	OK	
$\sigma_f < \varepsilon(f_0)$	$0.03425 < 0.1125$	OK	
$\sigma_A(f_0) < \theta(f_0)$	$0.5226 < 2.0$	OK	

L_w	window length
n_w	number of windows used in the analysis
$n_c = L_w n_w f_0$	number of significant cycles
f	current frequency
f_0	H/V peak frequency
σ_f	standard deviation of H/V peak frequency
$\varepsilon(f_0)$	threshold value for the stability condition $\sigma_f < \varepsilon(f_0)$
A_0	H/V peak amplitude at frequency f_0
$A_{H/V}(f)$	H/V curve amplitude at frequency f
f^-	frequency between $f_0/4$ and f_0 for which $A_{H/V}(f^-) < A_0/2$
f^+	frequency between f_0 and $4f_0$ for which $A_{H/V}(f^+) < A_0/2$
$\sigma_A(f)$	standard deviation of $A_{H/V}(f)$, $\sigma_A(f)$ is the factor by which the mean $A_{H/V}(f)$ curve should be multiplied or divided
$\sigma_{\log H/V}(f)$	standard deviation of $\log A_{H/V}(f)$ curve
$\theta(f_0)$	threshold value for the stability condition $\sigma_A(f) < \theta(f_0)$






Threshold values for σ_f and $\sigma_A(f_0)$

Freq. range [Hz]	< 0.2	0.2 – 0.5	0.5 – 1.0	1.0 – 2.0	> 2.0
$\varepsilon(f_0)$ [Hz]	$0.25 f_0$	$0.2 f_0$	$0.15 f_0$	$0.10 f_0$	$0.05 f_0$
$\theta(f_0)$ for $\sigma_A(f_0)$	3.0	2.5	2.0	1.78	1.58
$\log \theta(f_0)$ for $\sigma_{\log H/V}(f_0)$	0.48	0.40	0.30	0.25	0.20

Studio Samuel Sangiorgi
 Via Valsellustra 32, 40060 - Dozza (BO)
 info@studiosamuelsangiorgi.eu
 Tel. 0542-640279

Project: Microzonazione Sismica Malalbergo
Location: Parcoluna - Altedo

CPT: CPTU4
 Total depth: 20.23 m

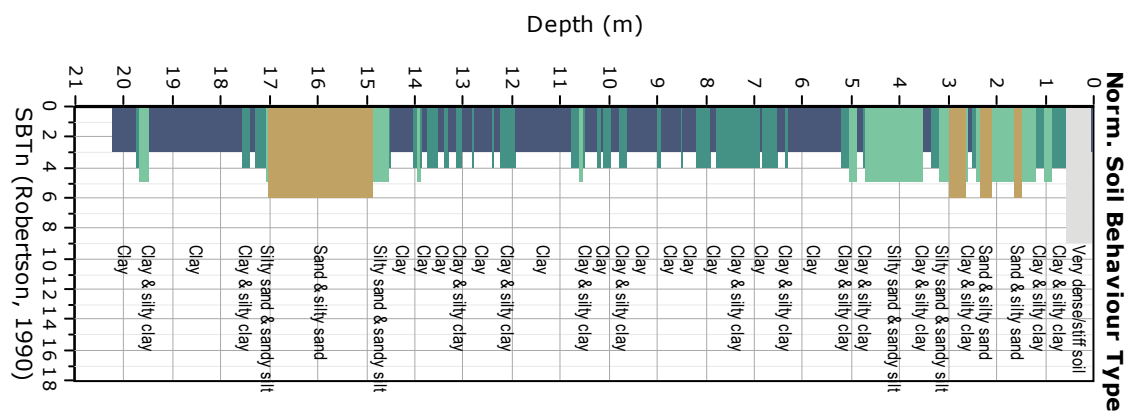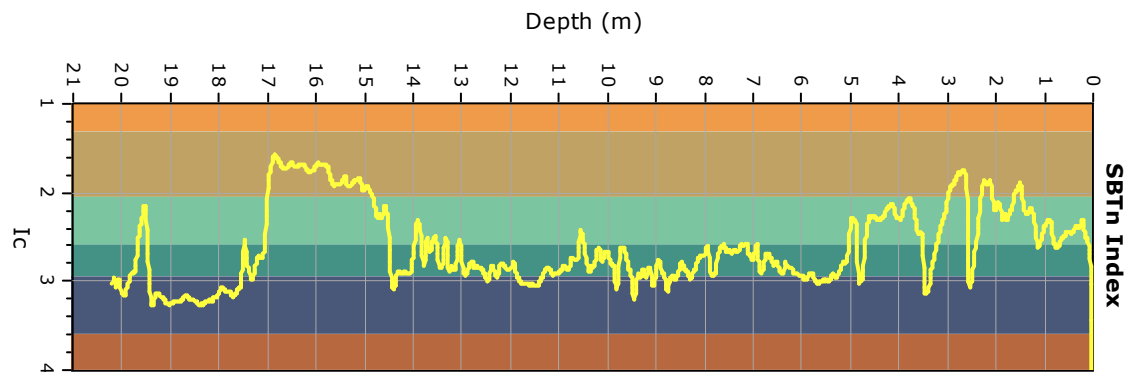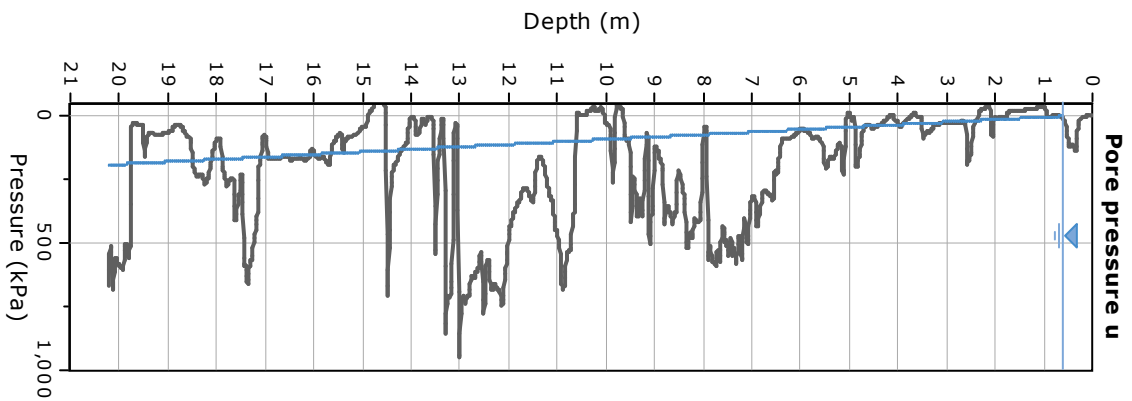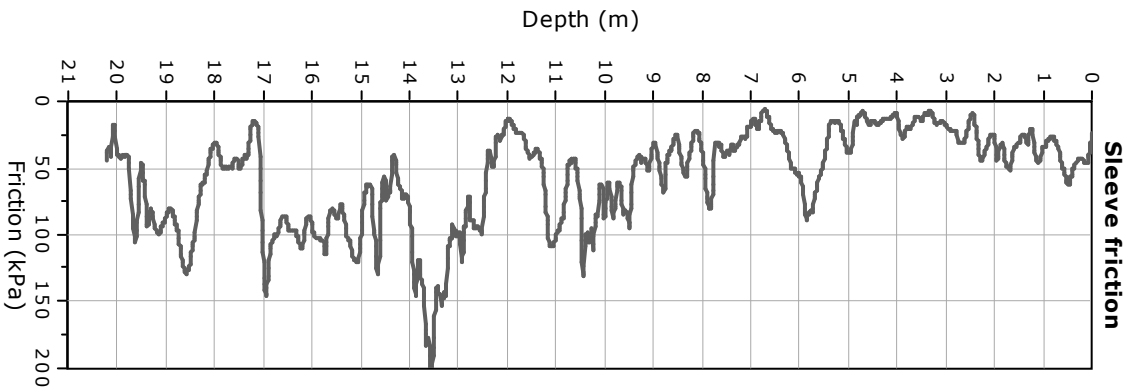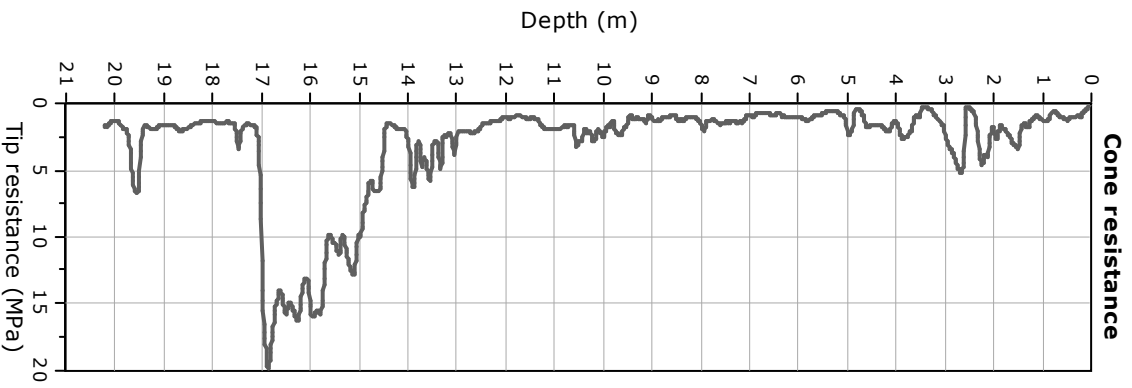

MALALBERGO_MS, MS 2018 TR5

037035P204HVSR255

Instrument: TRZ-0108/01-10

Start recording: 08/02/18 15:36:35 End recording: 08/02/18 15:56:35

Channel labels: NORTH SOUTH; EAST WEST ; UP DOWN

Trace length: 0h20'00". Analyzed 85% trace (manual window selection)

Sampling rate: 128 Hz


Window size: 20 s

Smoothing type: Triangular window


Smoothing: 10%

HORIZONTAL TO VERTICAL SPECTRAL RATIO


Max. H/V at 0.91 ± 0.05 Hz. (In the range 0.1 - 20.0 Hz).

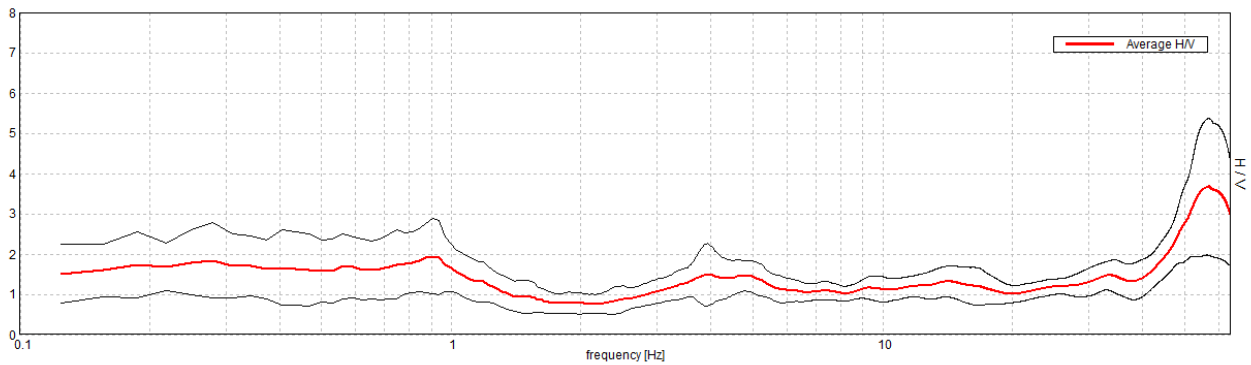


H/V TIME HISTORY

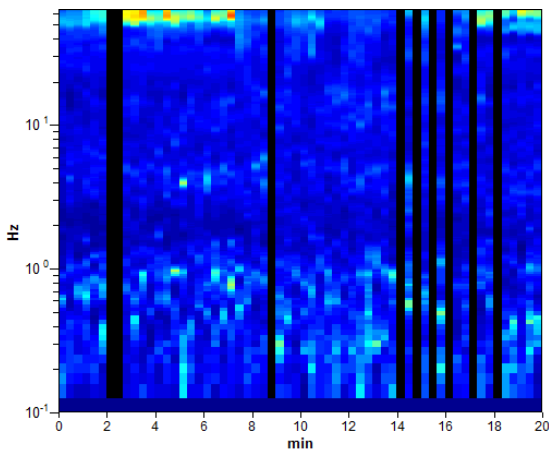

DIRECTIONAL H/V

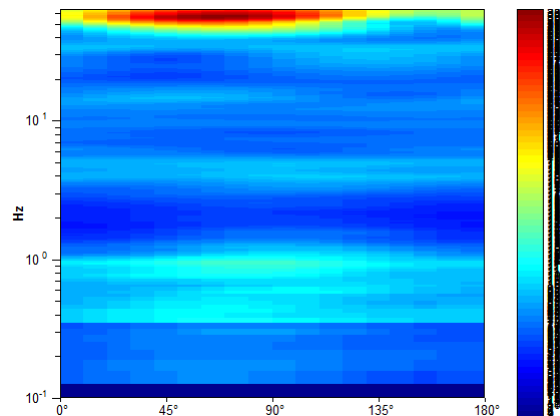

SINGLE COMPONENT SPECTRA

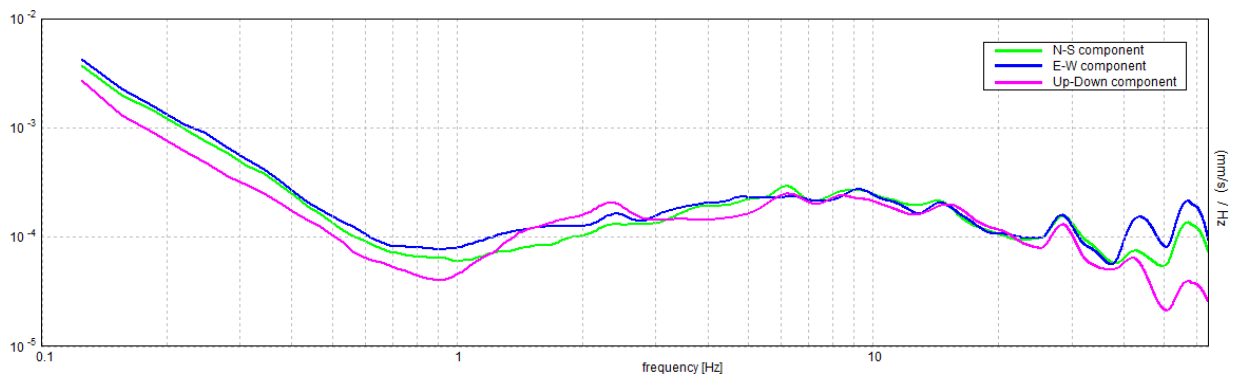

[According to the SESAME, 2005 guidelines. Please read carefully the *Grilla* manual before interpreting the following tables.]

Max. H/V at 0.91 ± 0.05 Hz (in the range 0.1 - 20.0 Hz).

Criteria for a reliable H/V curve

[All 3 should be fulfilled]

$f_0 > 10 / L_w$	$0.91 > 0.50$	OK	
$n_c(f_0) > 200$	$924.4 > 200$	OK	
$\sigma_A(f) < 2$ for $0.5f_0 < f < 2f_0$ if $f_0 > 0.5\text{Hz}$ $\sigma_A(f) < 3$ for $0.5f_0 < f < 2f_0$ if $f_0 < 0.5\text{Hz}$	Exceeded 0 out of 44 times	OK	

Criteria for a clear H/V peak

[At least 5 out of 6 should be fulfilled]

Exists f^- in $[f_0/4, f_0] \mid A_{H/V}(f^-) < A_0 / 2$			NO
Exists f^+ in $[f_0, 4f_0] \mid A_{H/V}(f^+) < A_0 / 2$	1.406 Hz	OK	
$A_0 > 2$	$1.95 > 2$		NO
$f_{\text{peak}}[A_{H/V}(f) \pm \sigma_A(f)] = f_0 \pm 5\%$	$ 0.0271 < 0.05$	OK	
$\sigma_f < \varepsilon(f_0)$	$0.02456 < 0.13594$	OK	
$\sigma_A(f_0) < \theta(f_0)$	$0.4555 < 2.0$	OK	

L_w	window length
n_w	number of windows used in the analysis
$n_c = L_w n_w f_0$	number of significant cycles
f	current frequency
f_0	H/V peak frequency
σ_f	standard deviation of H/V peak frequency
$\varepsilon(f_0)$	threshold value for the stability condition $\sigma_f < \varepsilon(f_0)$
A_0	H/V peak amplitude at frequency f_0
$A_{H/V}(f)$	H/V curve amplitude at frequency f
f^-	frequency between $f_0/4$ and f_0 for which $A_{H/V}(f^-) < A_0/2$
f^+	frequency between f_0 and $4f_0$ for which $A_{H/V}(f^+) < A_0/2$
$\sigma_A(f)$	standard deviation of $A_{H/V}(f)$, $\sigma_A(f)$ is the factor by which the mean $A_{H/V}(f)$ curve should be multiplied or divided
$\sigma_{\log H/V}(f)$	standard deviation of $\log A_{H/V}(f)$ curve
$\theta(f_0)$	threshold value for the stability condition $\sigma_A(f) < \theta(f_0)$






Threshold values for σ_f and $\sigma_A(f_0)$

Freq. range [Hz]	< 0.2	0.2 – 0.5	0.5 – 1.0	1.0 – 2.0	> 2.0
$\varepsilon(f_0)$ [Hz]	$0.25 f_0$	$0.2 f_0$	$0.15 f_0$	$0.10 f_0$	$0.05 f_0$
$\theta(f_0)$ for $\sigma_A(f_0)$	3.0	2.5	2.0	1.78	1.58
$\log \theta(f_0)$ for $\sigma_{\log H/V}(f_0)$	0.48	0.40	0.30	0.25	0.20

Studio Samuel Sangiorgi
 Via Valsellustra 32, 40060 - Dozza (BO)
 info@studiosamuelsangiorgi.eu
 Tel. 0542-640279

Project: Microzonazione Sismica Malalbergo
Location: via Castelvetri - Altedo

CPT: CPTUS
 Total depth: 20.38 m

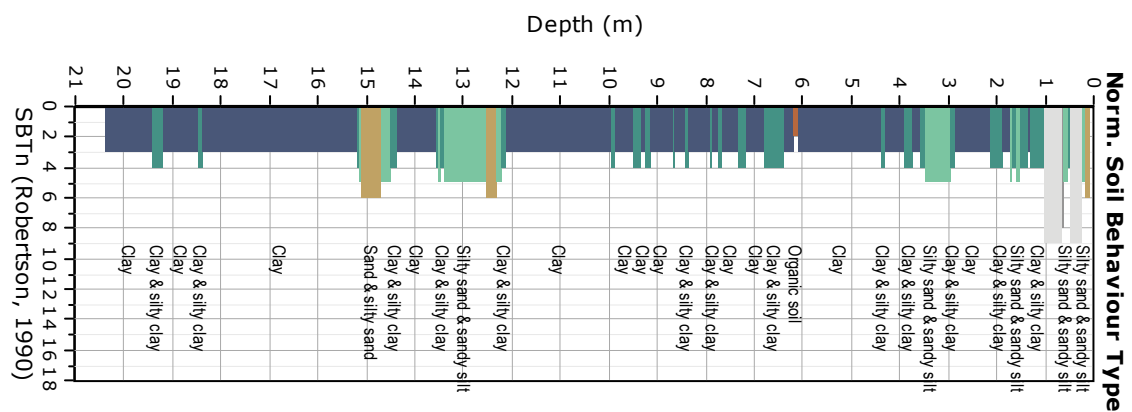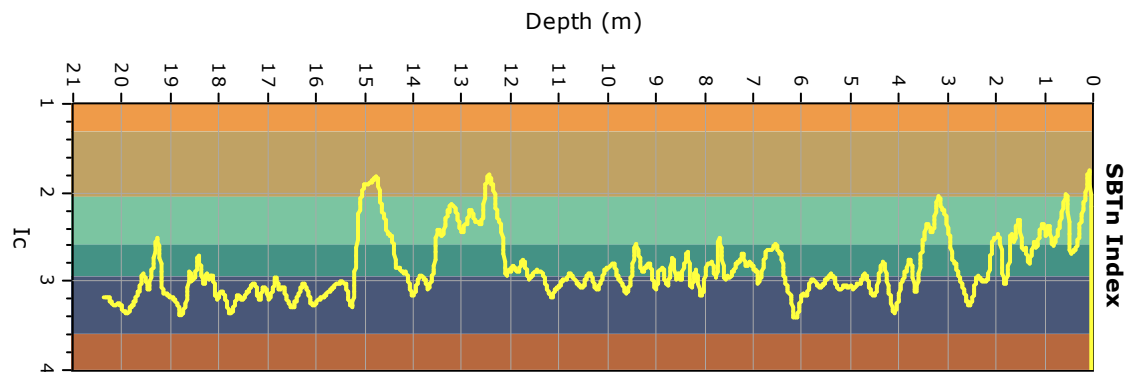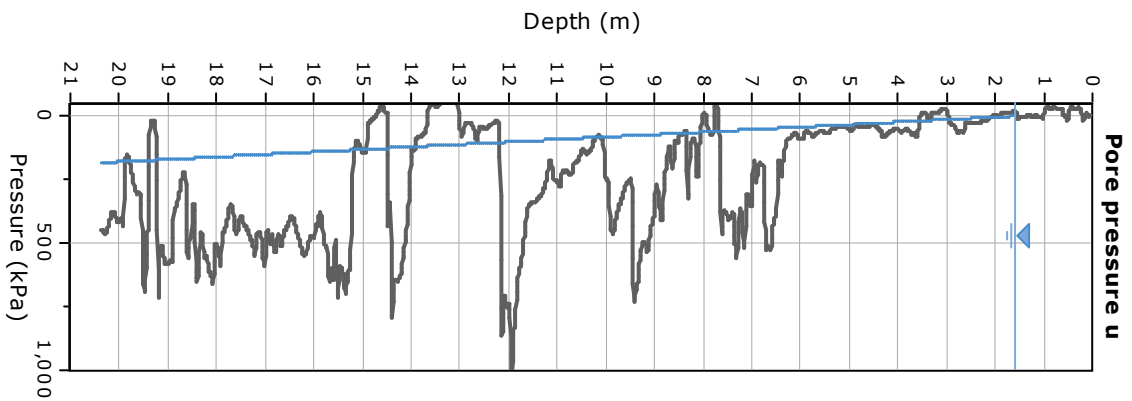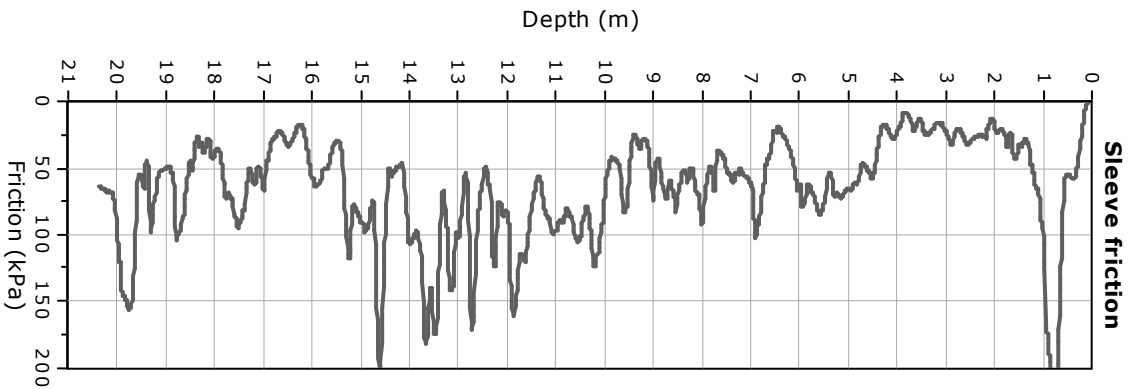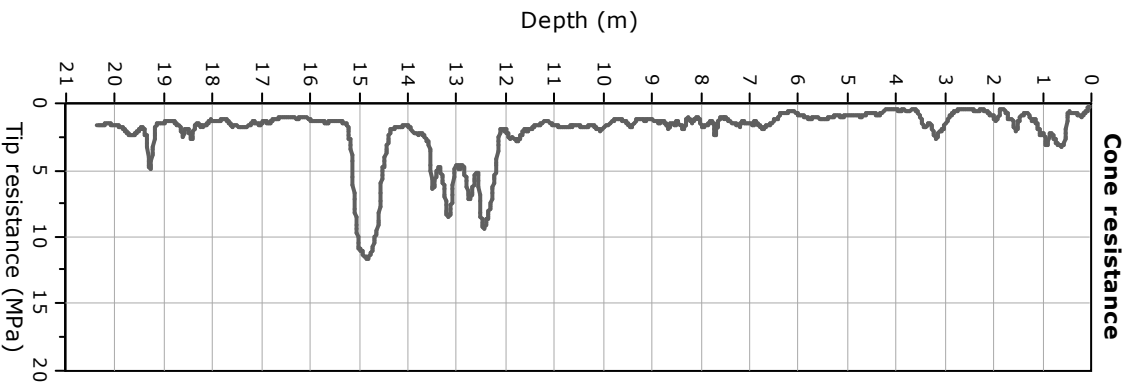

MALALBERGO_MS, MS 2018 TR11

037035P205HVSR257

Instrument: TRZ-0108/01-10

Start recording: 23/03/18 09:47:33 End recording: 23/03/18 10:47:34

Channel labels: NORTH SOUTH; EAST WEST ; UP DOWN

Trace length: 1h00'00". Analyzed 95% trace (manual window selection)

Sampling rate: 128 Hz


Window size: 60 s

Smoothing type: Triangular window


Smoothing: 10%

HORIZONTAL TO VERTICAL SPECTRAL RATIO


Max. H/V at 0.94 ± 0.07 Hz. (In the range 0.1 - 20.0 Hz).

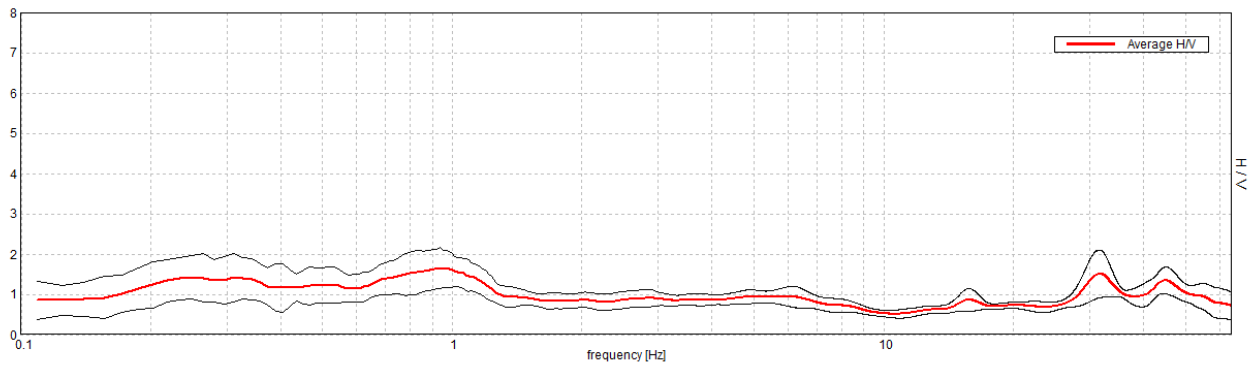


H/V TIME HISTORY

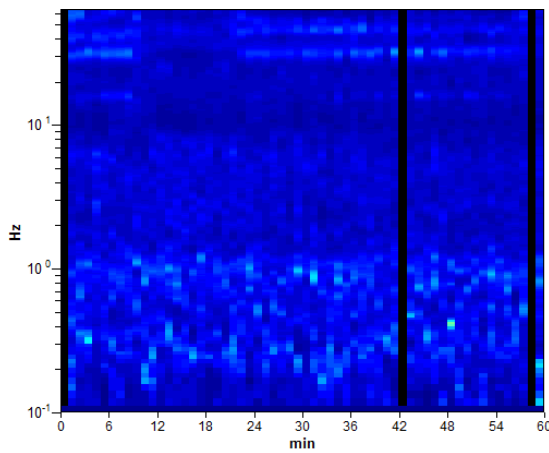

DIRECTIONAL H/V

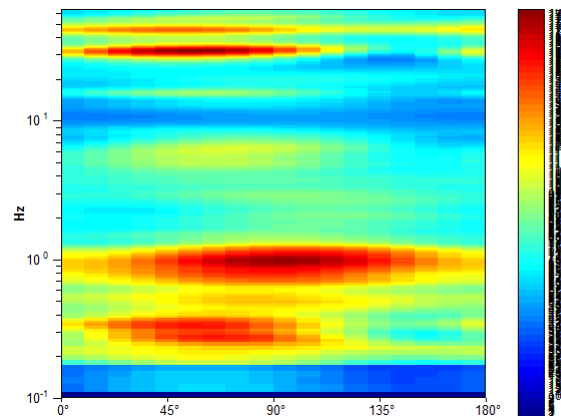

SINGLE COMPONENT SPECTRA

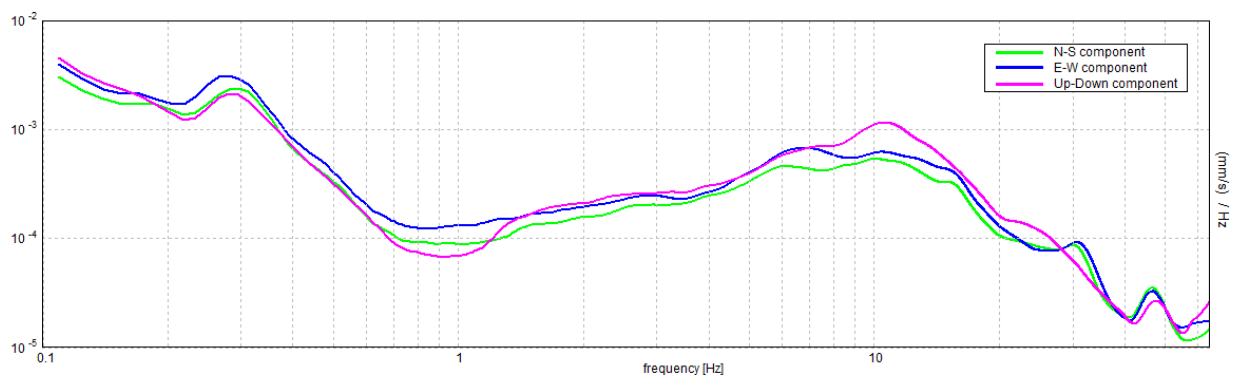

[According to the SESAME, 2005 guidelines. Please read carefully the *Grilla* manual before interpreting the following tables.]

Max. H/V at 0.94 ± 0.07 Hz (in the range 0.1 - 20.0 Hz).

Criteria for a reliable H/V curve

[All 3 should be fulfilled]

$f_0 > 10 / L_w$	$0.94 > 0.17$	OK	
$n_c(f_0) > 200$	$3206.3 > 200$	OK	
$\sigma_A(f) < 2$ for $0.5f_0 < f < 2f_0$ if $f_0 > 0.5\text{Hz}$ $\sigma_A(f) < 3$ for $0.5f_0 < f < 2f_0$ if $f_0 < 0.5\text{Hz}$	Exceeded 0 out of 91 times	OK	

Criteria for a clear H/V peak

[At least 5 out of 6 should be fulfilled]

Exists f^- in $[f_0/4, f_0] \mid A_{H/V}(f^-) < A_0 / 2$			NO
Exists f^+ in $[f_0, 4f_0] \mid A_{H/V}(f^+) < A_0 / 2$	2.156 Hz	OK	
$A_0 > 2$	$1.65 > 2$		NO
$f_{\text{peak}}[A_{H/V}(f) \pm \sigma_A(f)] = f_0 \pm 5\%$	$ 0.03541 < 0.05$	OK	
$\sigma_f < \varepsilon(f_0)$	$0.0332 < 0.14063$	OK	
$\sigma_A(f_0) < \theta(f_0)$	$0.2508 < 2.0$	OK	

L_w	window length
n_w	number of windows used in the analysis
$n_c = L_w n_w f_0$	number of significant cycles
f	current frequency
f_0	H/V peak frequency
σ_f	standard deviation of H/V peak frequency
$\varepsilon(f_0)$	threshold value for the stability condition $\sigma_f < \varepsilon(f_0)$
A_0	H/V peak amplitude at frequency f_0
$A_{H/V}(f)$	H/V curve amplitude at frequency f
f^-	frequency between $f_0/4$ and f_0 for which $A_{H/V}(f^-) < A_0/2$
f^+	frequency between f_0 and $4f_0$ for which $A_{H/V}(f^+) < A_0/2$
$\sigma_A(f)$	standard deviation of $A_{H/V}(f)$, $\sigma_A(f)$ is the factor by which the mean $A_{H/V}(f)$ curve should be multiplied or divided
$\sigma_{\log H/V}(f)$	standard deviation of $\log A_{H/V}(f)$ curve
$\theta(f_0)$	threshold value for the stability condition $\sigma_A(f) < \theta(f_0)$


Threshold values for σ_f and $\sigma_A(f_0)$

Freq. range [Hz]	< 0.2	0.2 – 0.5	0.5 – 1.0	1.0 – 2.0	> 2.0
$\varepsilon(f_0)$ [Hz]	$0.25 f_0$	$0.2 f_0$	$0.15 f_0$	$0.10 f_0$	$0.05 f_0$
$\theta(f_0)$ for $\sigma_A(f_0)$	3.0	2.5	2.0	1.78	1.58
$\log \theta(f_0)$ for $\sigma_{\log H/V}(f_0)$	0.48	0.40	0.30	0.25	0.20

Studio Samuel Sangiorgi
 Via Valsellustra 32, 40060 - Dozza (BO)
 info@studiosamuelsangiorgi.eu
 Tel. 0542-640279

Project: Microzonazione Sismica Malalbergo
Location: via Fellini - Altedo

CPT: CPTU6
 Total depth: 20.25 m

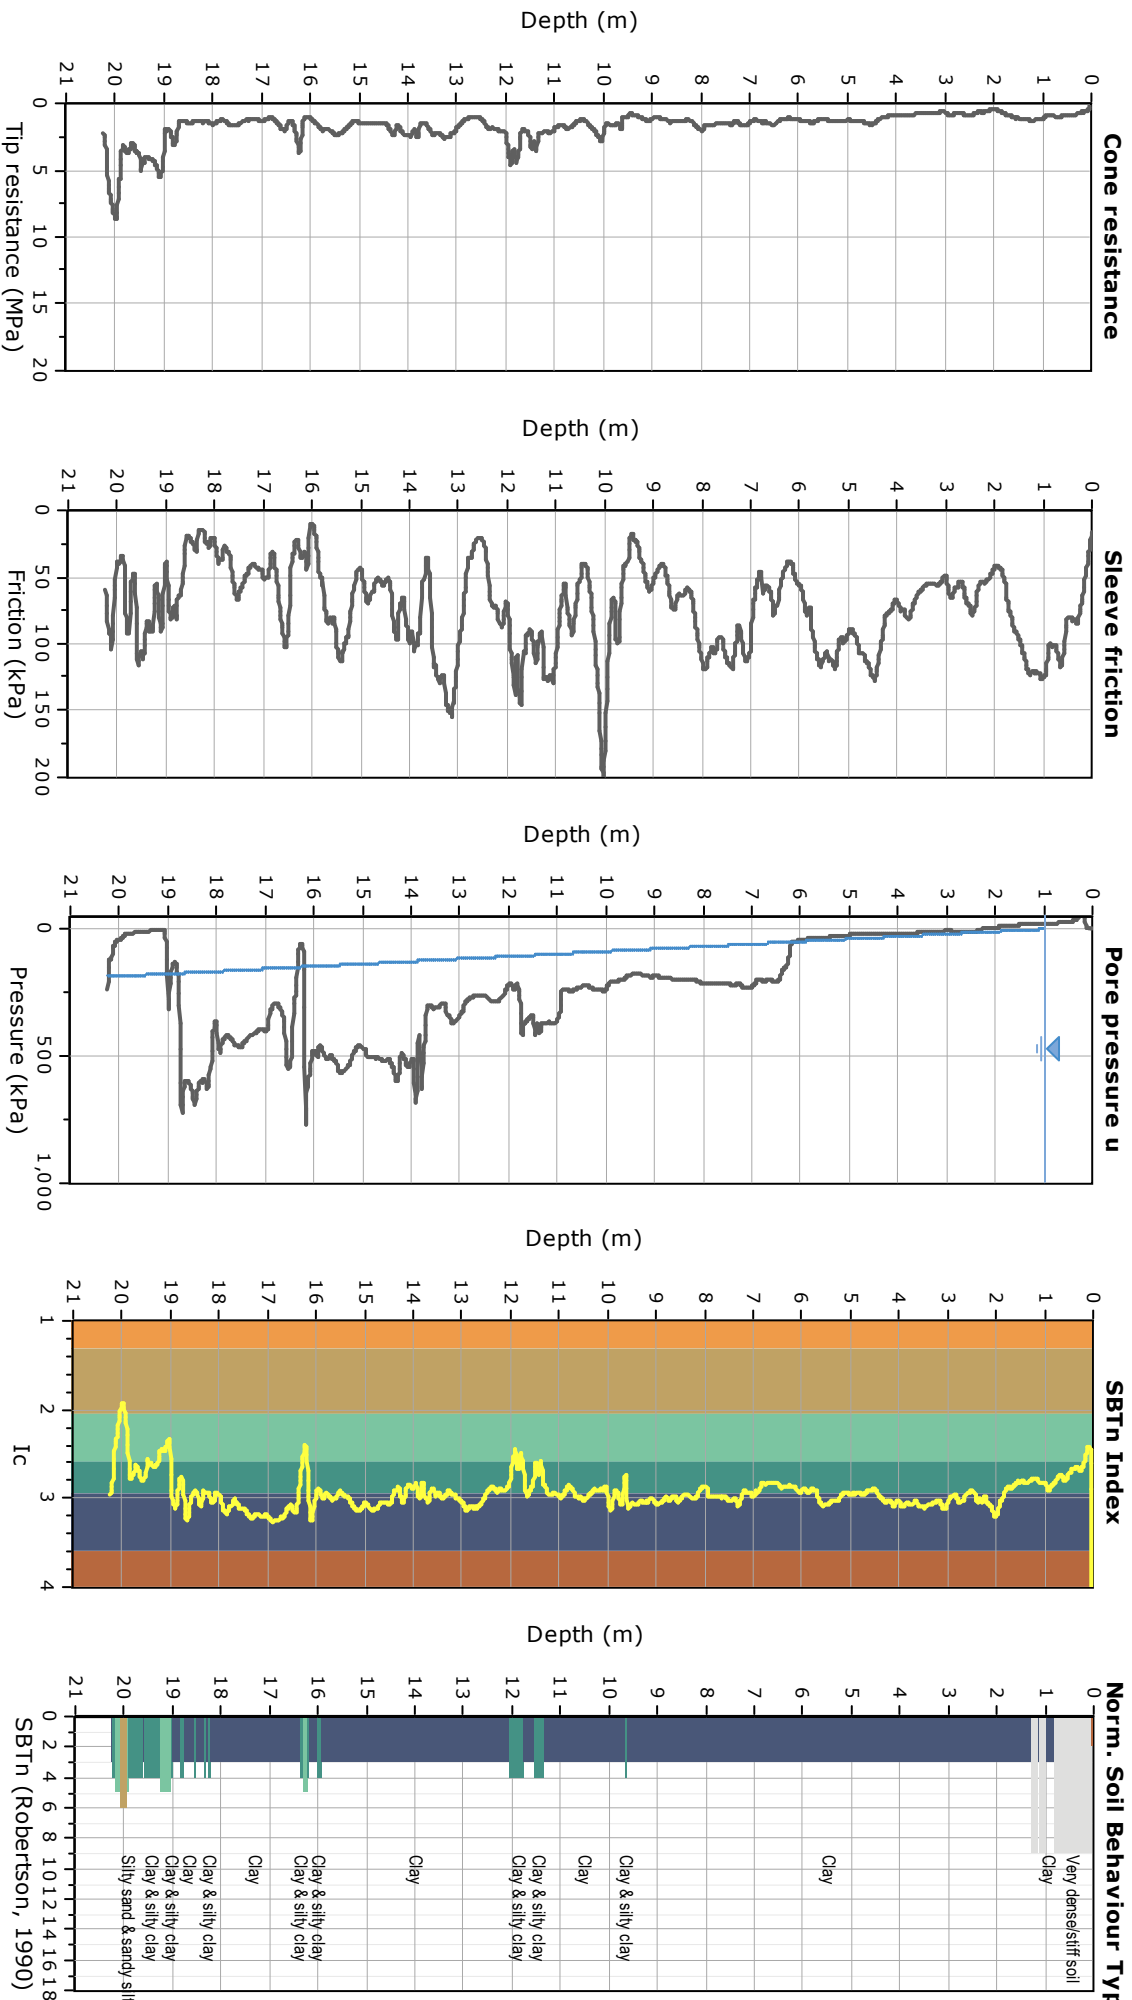

MALALBERGO_MS, MS 2018 TR12

037035P206HVSR259

Instrument: TRZ-0108/01-10

Start recording: 23/03/18 12:20:23 End recording: 23/03/18 12:40:24

Channel labels: NORTH SOUTH; EAST WEST ; UP DOWN

Trace length: 0h20'00". Analyzed 88% trace (manual window selection)

Sampling rate: 128 Hz


Window size: 20 s

Smoothing type: Triangular window


Smoothing: 10%

HORIZONTAL TO VERTICAL SPECTRAL RATIO


Max. H/V at 0.84 ± 0.04 Hz. (In the range 0.1 - 20.0 Hz).

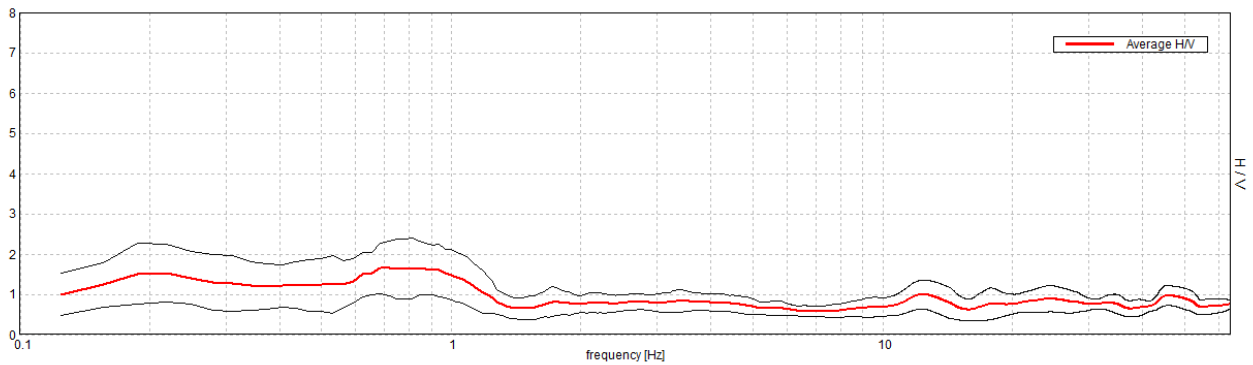


H/V TIME HISTORY

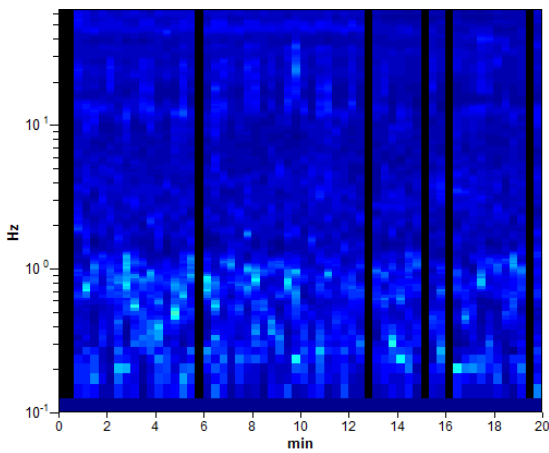

DIRECTIONAL H/V

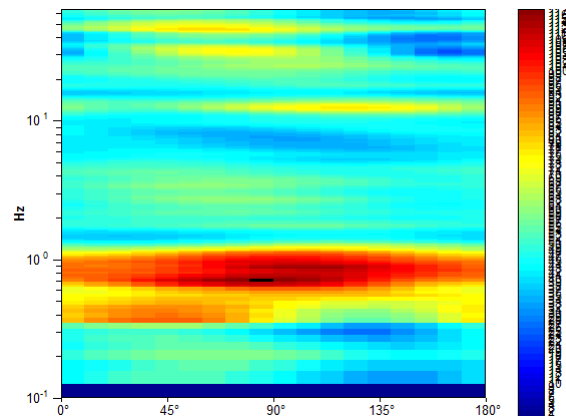

SINGLE COMPONENT SPECTRA

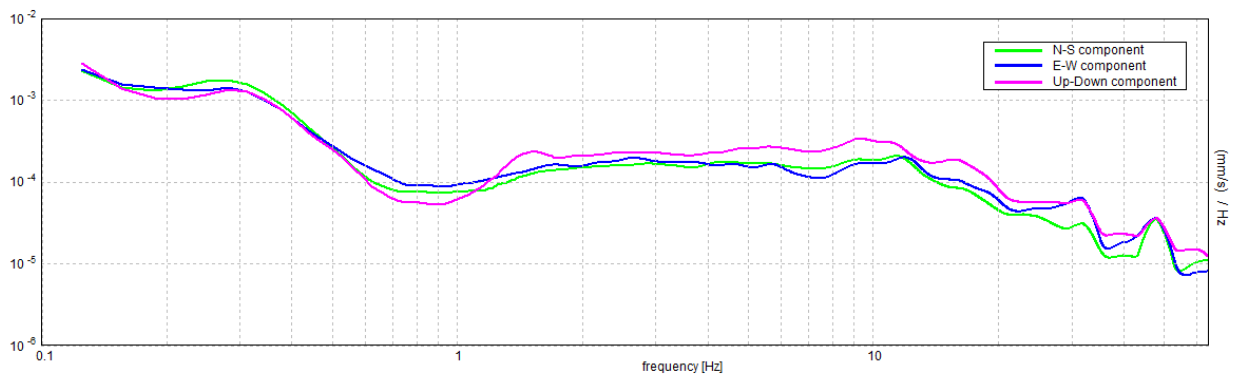

[According to the SESAME, 2005 guidelines. Please read carefully the *Grilla* manual before interpreting the following tables.]

Max. H/V at 0.84 ± 0.04 Hz (in the range 0.1 - 20.0 Hz).

Criteria for a reliable H/V curve

[All 3 should be fulfilled]

$f_0 > 10 / L_w$	$0.84 > 0.50$	OK	
$n_c(f_0) > 200$	$894.4 > 200$	OK	
$\sigma_A(f) < 2$ for $0.5f_0 < f < 2f_0$ if $f_0 > 0.5\text{Hz}$ $\sigma_A(f) < 3$ for $0.5f_0 < f < 2f_0$ if $f_0 < 0.5\text{Hz}$	Exceeded 0 out of 42 times	OK	

Criteria for a clear H/V peak

[At least 5 out of 6 should be fulfilled]

Exists f^- in $[f_0/4, f_0] \mid A_{H/V}(f^-) < A_0 / 2$			NO
Exists f^+ in $[f_0, 4f_0] \mid A_{H/V}(f^+) < A_0 / 2$	1.281 Hz	OK	
$A_0 > 2$	$1.65 > 2$		NO
$f_{\text{peak}}[A_{H/V}(f) \pm \sigma_A(f)] = f_0 \pm 5\%$	$ 0.02546 < 0.05$	OK	
$\sigma_f < \varepsilon(f_0)$	$0.02148 < 0.12656$	OK	
$\sigma_A(f_0) < \theta(f_0)$	$0.3305 < 2.0$	OK	

L_w	window length
n_w	number of windows used in the analysis
$n_c = L_w n_w f_0$	number of significant cycles
f	current frequency
f_0	H/V peak frequency
σ_f	standard deviation of H/V peak frequency
$\varepsilon(f_0)$	threshold value for the stability condition $\sigma_f < \varepsilon(f_0)$
A_0	H/V peak amplitude at frequency f_0
$A_{H/V}(f)$	H/V curve amplitude at frequency f
f^-	frequency between $f_0/4$ and f_0 for which $A_{H/V}(f^-) < A_0/2$
f^+	frequency between f_0 and $4f_0$ for which $A_{H/V}(f^+) < A_0/2$
$\sigma_A(f)$	standard deviation of $A_{H/V}(f)$, $\sigma_A(f)$ is the factor by which the mean $A_{H/V}(f)$ curve should be multiplied or divided
$\sigma_{\log H/V}(f)$	standard deviation of $\log A_{H/V}(f)$ curve
$\theta(f_0)$	threshold value for the stability condition $\sigma_A(f) < \theta(f_0)$


Threshold values for σ_f and $\sigma_A(f_0)$

Freq. range [Hz]	< 0.2	0.2 – 0.5	0.5 – 1.0	1.0 – 2.0	> 2.0
$\varepsilon(f_0)$ [Hz]	$0.25 f_0$	$0.2 f_0$	$0.15 f_0$	$0.10 f_0$	$0.05 f_0$
$\theta(f_0)$ for $\sigma_A(f_0)$	3.0	2.5	2.0	1.78	1.58
$\log \theta(f_0)$ for $\sigma_{\log H/V}(f_0)$	0.48	0.40	0.30	0.25	0.20

Studio Samuel Sangiorgi
 Via Valsellustra 32, 40060 - Dozza (BO)
 info@studiosamuelsangiorgi.eu
 Tel: 0542-640279

Project: Microzonazione Sismica Malalbergo
Location: Strada Provinciale 20 - Altedo

CPT: CPTU7
 Total depth: 20.38 m

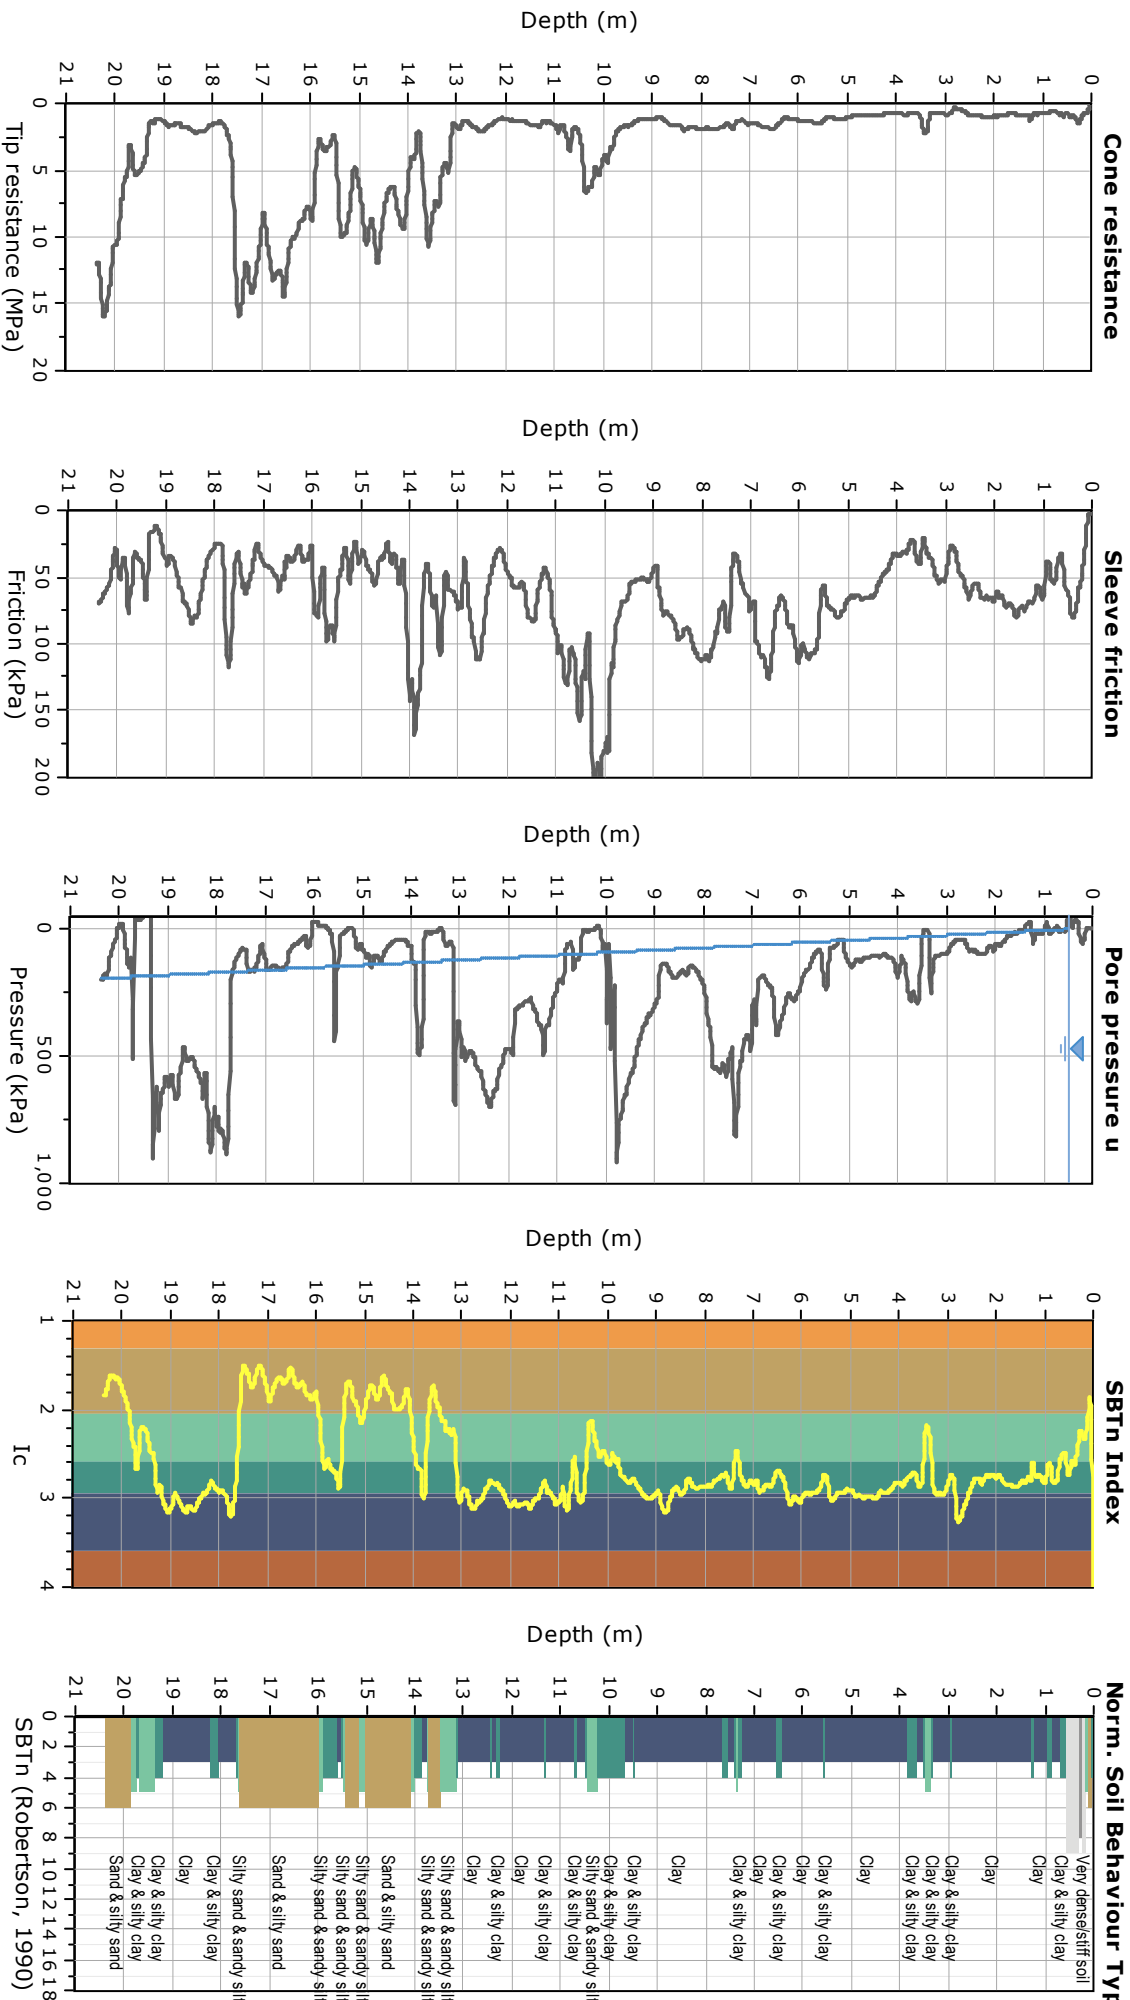

MALALBERGO_MS, MS 2018 TR13

037035P207HVSR261

Instrument: TRZ-0108/01-10

Start recording: 29/03/18 08:37:31 End recording: 29/03/18 08:57:32

Channel labels: NORTH SOUTH; EAST WEST ; UP DOWN

Trace length: 0h20'00". Analyzed 83% trace (manual window selection)

Sampling rate: 128 Hz


Window size: 20 s

Smoothing type: Triangular window


Smoothing: 10%

HORIZONTAL TO VERTICAL SPECTRAL RATIO


Max. H/V at 0.84 ± 0.21 Hz. (In the range 0.1 - 20.0 Hz).

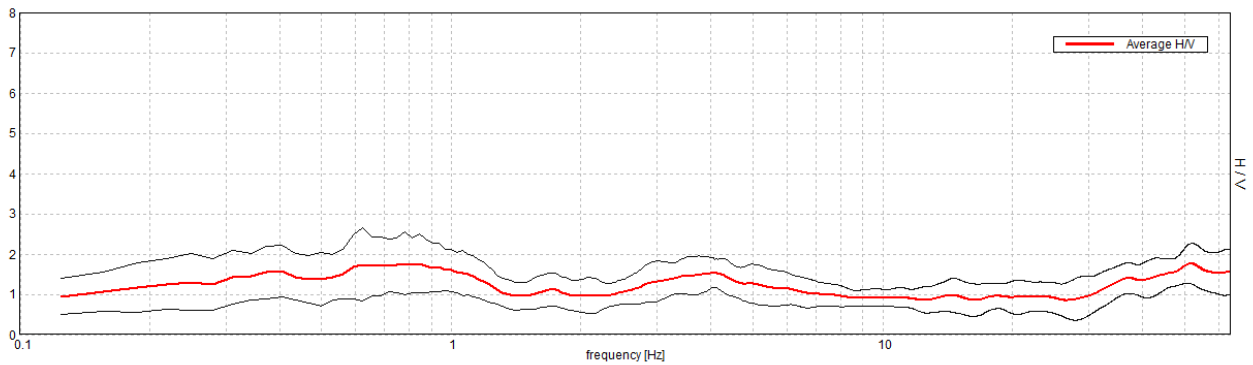


H/V TIME HISTORY

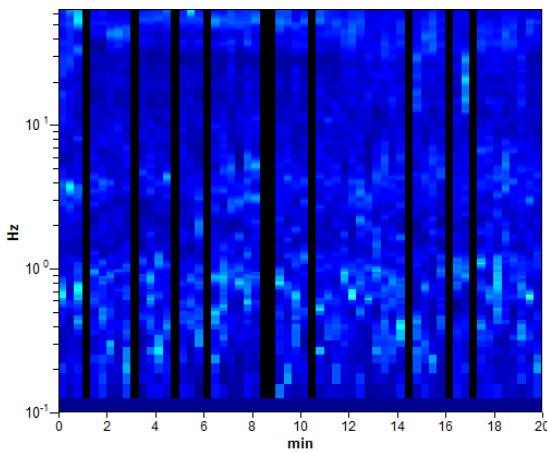

DIRECTIONAL H/V

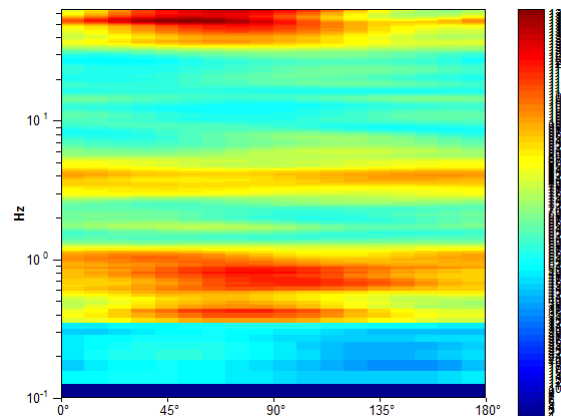

SINGLE COMPONENT SPECTRA

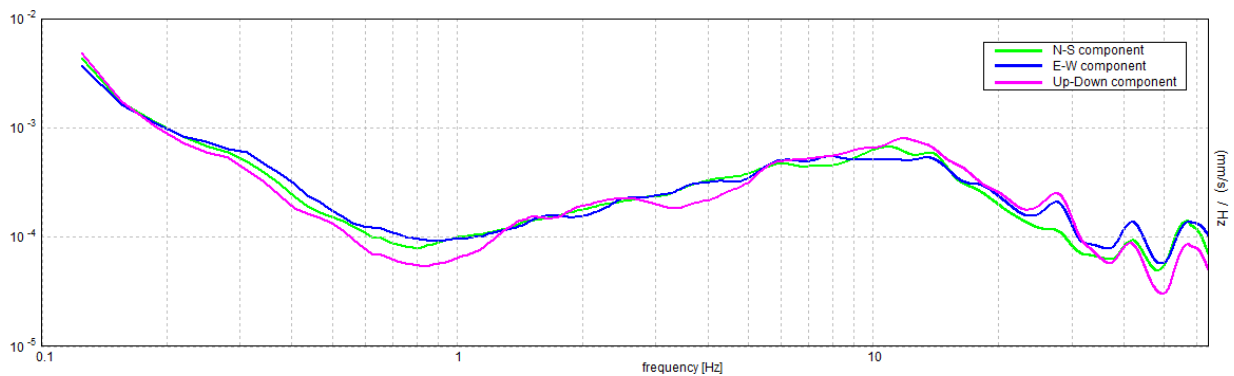

[According to the SESAME, 2005 guidelines. Please read carefully the *Grilla* manual before interpreting the following tables.]

Max. H/V at 0.84 ± 0.21 Hz (in the range 0.1 - 20.0 Hz).

Criteria for a reliable H/V curve

[All 3 should be fulfilled]

$f_0 > 10 / L_w$	$0.84 > 0.50$	OK	
$n_c(f_0) > 200$	$843.8 > 200$	OK	
$\sigma_A(f) < 2$ for $0.5f_0 < f < 2f_0$ if $f_0 > 0.5\text{Hz}$ $\sigma_A(f) < 3$ for $0.5f_0 < f < 2f_0$ if $f_0 < 0.5\text{Hz}$	Exceeded 0 out of 42 times	OK	

Criteria for a clear H/V peak

[At least 5 out of 6 should be fulfilled]

Exists f^- in $[f_0/4, f_0]$ $A_{H/V}(f^-) < A_0 / 2$			NO
Exists f^+ in $[f_0, 4f_0]$ $A_{H/V}(f^+) < A_0 / 2$			NO
$A_0 > 2$	$1.77 > 2$		NO
$f_{\text{peak}}[A_{H/V}(f) \pm \sigma_A(f)] = f_0 \pm 5\%$	$ 0.12043 < 0.05$		NO
$\sigma_f < \varepsilon(f_0)$	$0.10162 < 0.12656$	OK	
$\sigma_A(f_0) < \theta(f_0)$	$0.3593 < 2.0$	OK	

L_w	window length
n_w	number of windows used in the analysis
$n_c = L_w n_w f_0$	number of significant cycles
f	current frequency
f_0	H/V peak frequency
σ_f	standard deviation of H/V peak frequency
$\varepsilon(f_0)$	threshold value for the stability condition $\sigma_f < \varepsilon(f_0)$
A_0	H/V peak amplitude at frequency f_0
$A_{H/V}(f)$	H/V curve amplitude at frequency f
f^-	frequency between $f_0/4$ and f_0 for which $A_{H/V}(f^-) < A_0/2$
f^+	frequency between f_0 and $4f_0$ for which $A_{H/V}(f^+) < A_0/2$
$\sigma_A(f)$	standard deviation of $A_{H/V}(f)$, $\sigma_A(f)$ is the factor by which the mean $A_{H/V}(f)$ curve should be multiplied or divided
$\sigma_{\log H/V}(f)$	standard deviation of $\log A_{H/V}(f)$ curve
$\theta(f_0)$	threshold value for the stability condition $\sigma_A(f) < \theta(f_0)$






Threshold values for σ_f and $\sigma_A(f_0)$

Freq. range [Hz]	< 0.2	0.2 – 0.5	0.5 – 1.0	1.0 – 2.0	> 2.0
$\varepsilon(f_0)$ [Hz]	$0.25 f_0$	$0.2 f_0$	$0.15 f_0$	$0.10 f_0$	$0.05 f_0$
$\theta(f_0)$ for $\sigma_A(f_0)$	3.0	2.5	2.0	1.78	1.58
$\log \theta(f_0)$ for $\sigma_{\log H/V}(f_0)$	0.48	0.40	0.30	0.25	0.20

Studio Samuel Sangiorgi
 Via Valsellustra 32, 40060 - Dozza (BO)
 info@studiosamuelsangiorgi.eu
 Tel. 0542-640279

Project: Microzonazione Sismica Malalbergo
Location: via la Cascina - Malalbergo

CPT: CPTU8
 Total depth: 20.27 m

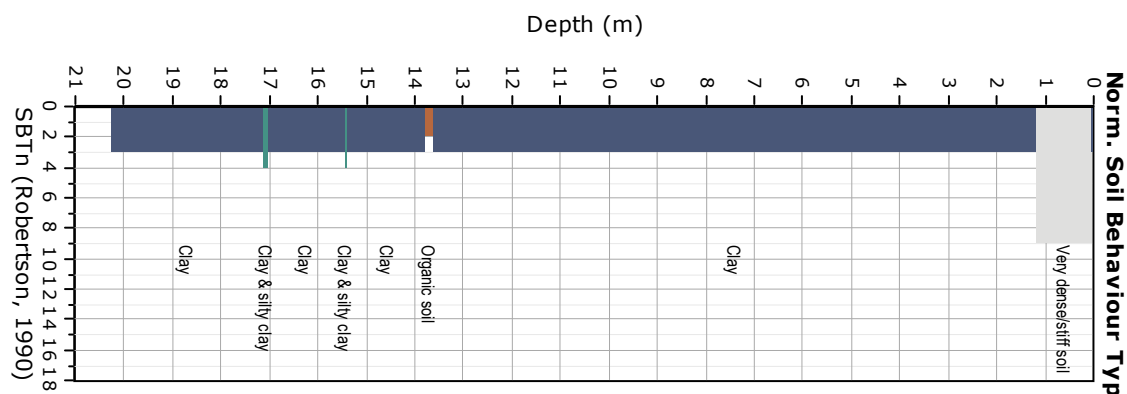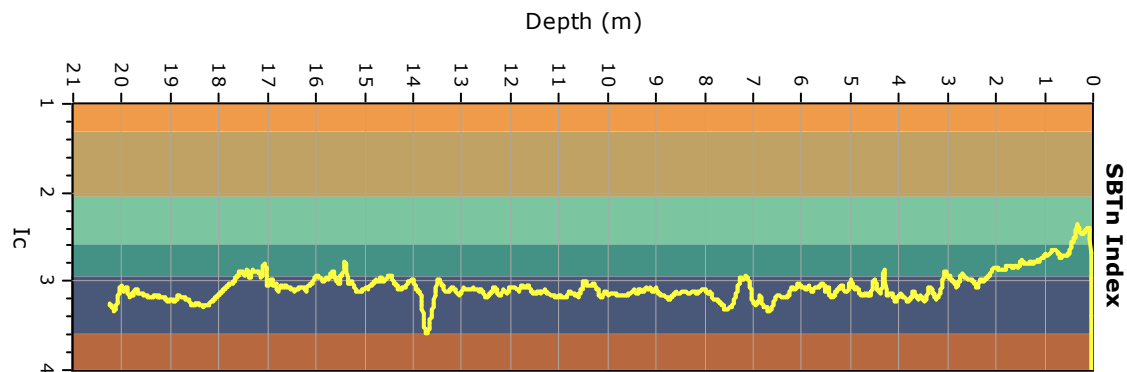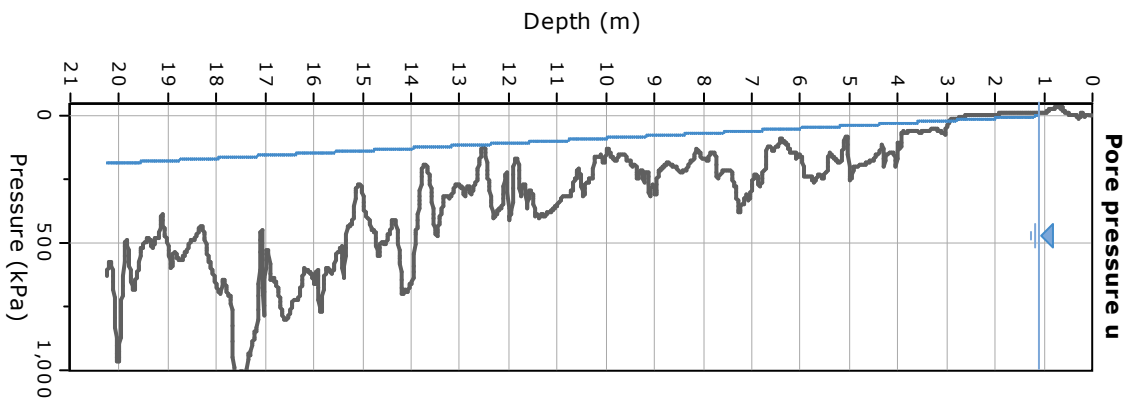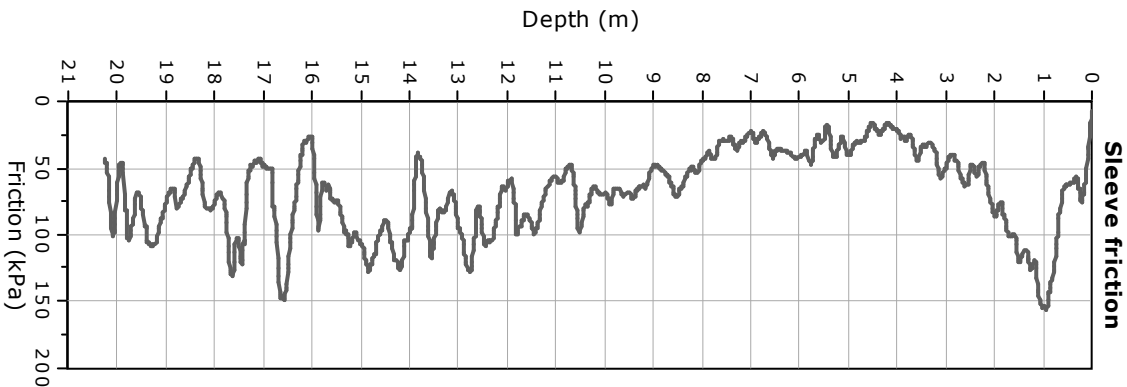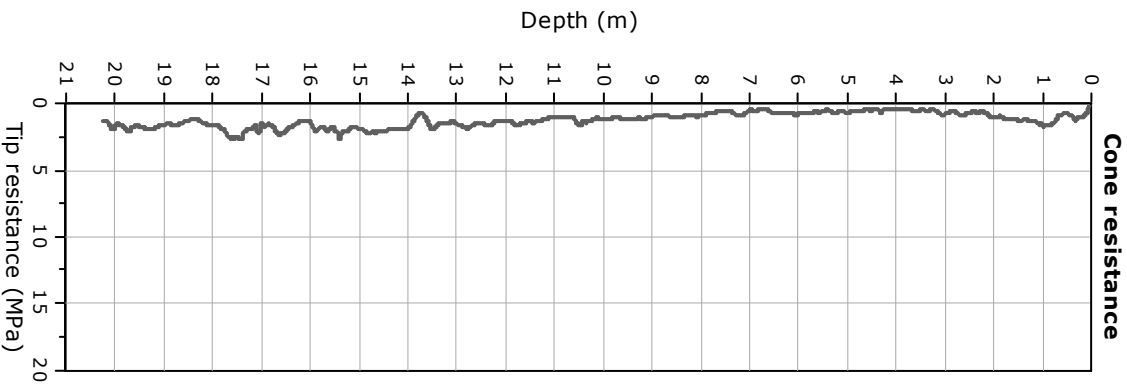

MALALBERGO_MS, MS 2018 TR9

037035P208HVSR263

Instrument: TRZ-0108/01-10

Start recording: 09/03/18 15:31:21 End recording: 09/03/18 16:31:21

Channel labels: NORTH SOUTH; EAST WEST ; UP DOWN

Trace length: 1h00'00". Analyzed 93% trace (manual window selection)

Sampling rate: 128 Hz


Window size: 60 s

Smoothing type: Triangular window


Smoothing: 10%

HORIZONTAL TO VERTICAL SPECTRAL RATIO


Max. H/V at 0.77 ± 0.02 Hz. (In the range 0.1 - 20.0 Hz).

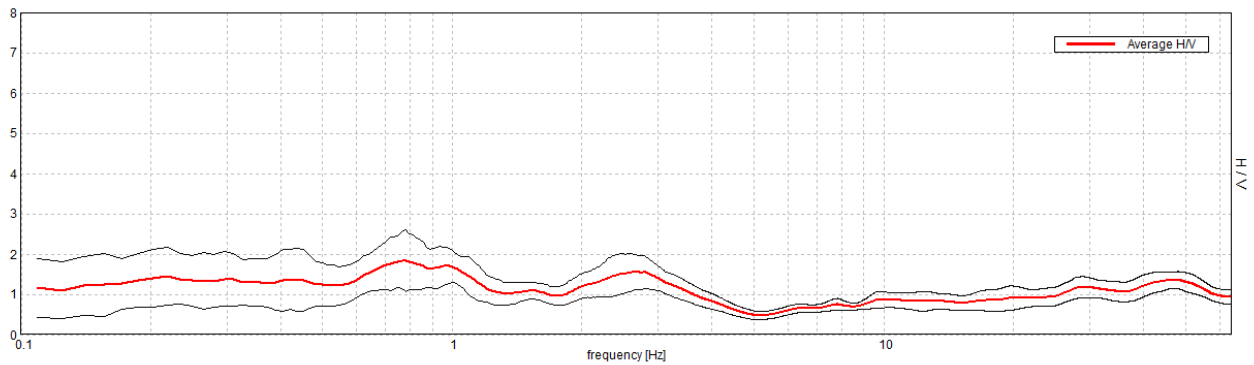


H/V TIME HISTORY

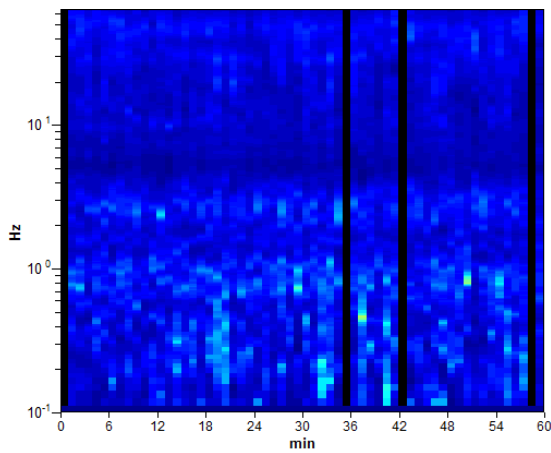

DIRECTIONAL H/V

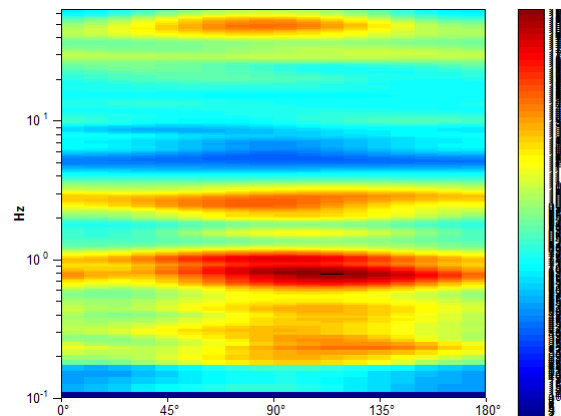

SINGLE COMPONENT SPECTRA

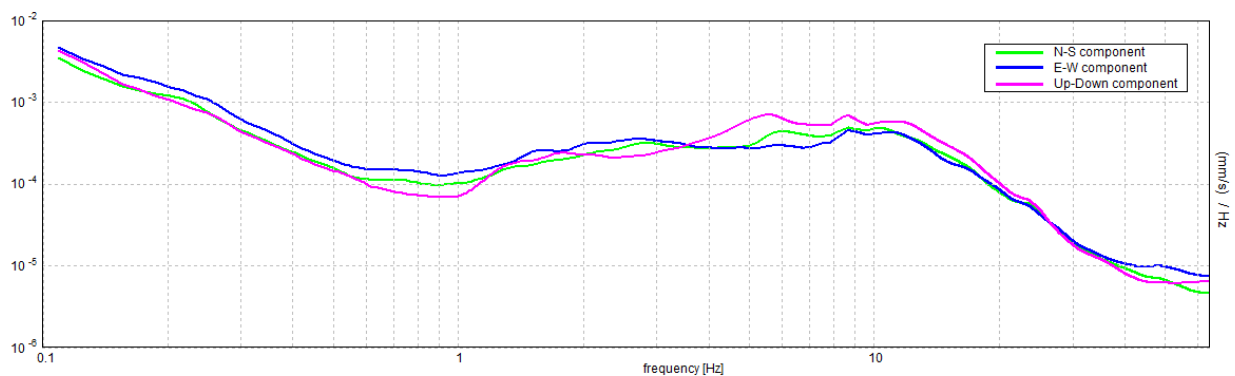

[According to the SESAME, 2005 guidelines. Please read carefully the *Grilla* manual before interpreting the following tables.]

Max. H/V at 0.77 ± 0.02 Hz (in the range 0.1 - 20.0 Hz).

Criteria for a reliable H/V curve

[All 3 should be fulfilled]

$f_0 > 10 / L_w$	$0.77 > 0.17$	OK	
$n_c(f_0) > 200$	$2572.5 > 200$	OK	
$\sigma_A(f) < 2$ for $0.5f_0 < f < 2f_0$ if $f_0 > 0.5\text{Hz}$ $\sigma_A(f) < 3$ for $0.5f_0 < f < 2f_0$ if $f_0 < 0.5\text{Hz}$	Exceeded 0 out of 74 times	OK	

Criteria for a clear H/V peak

[At least 5 out of 6 should be fulfilled]

Exists f^- in $[f_0/4, f_0]$ $A_{H/V}(f^-) < A_0 / 2$			NO
Exists f^+ in $[f_0, 4f_0]$ $A_{H/V}(f^+) < A_0 / 2$			NO
$A_0 > 2$	$1.84 > 2$		NO
$f_{\text{peak}}[A_{H/V}(f) \pm \sigma_A(f)] = f_0 \pm 5\%$	$ 0.01534 < 0.05$	OK	
$\sigma_f < \varepsilon(f_0)$	$0.01175 < 0.11484$	OK	
$\sigma_A(f_0) < \theta(f_0)$	$0.346 < 2.0$	OK	

L_w	window length
n_w	number of windows used in the analysis
$n_c = L_w n_w f_0$	number of significant cycles
f	current frequency
f_0	H/V peak frequency
σ_f	standard deviation of H/V peak frequency
$\varepsilon(f_0)$	threshold value for the stability condition $\sigma_f < \varepsilon(f_0)$
A_0	H/V peak amplitude at frequency f_0
$A_{H/V}(f)$	H/V curve amplitude at frequency f
f^-	frequency between $f_0/4$ and f_0 for which $A_{H/V}(f^-) < A_0/2$
f^+	frequency between f_0 and $4f_0$ for which $A_{H/V}(f^+) < A_0/2$
$\sigma_A(f)$	standard deviation of $A_{H/V}(f)$, $\sigma_A(f)$ is the factor by which the mean $A_{H/V}(f)$ curve should be multiplied or divided
$\sigma_{\log H/V}(f)$	standard deviation of $\log A_{H/V}(f)$ curve
$\theta(f_0)$	threshold value for the stability condition $\sigma_A(f) < \theta(f_0)$






Threshold values for σ_f and $\sigma_A(f_0)$

Freq. range [Hz]	< 0.2	0.2 – 0.5	0.5 – 1.0	1.0 – 2.0	> 2.0
$\varepsilon(f_0)$ [Hz]	$0.25 f_0$	$0.2 f_0$	$0.15 f_0$	$0.10 f_0$	$0.05 f_0$
$\theta(f_0)$ for $\sigma_A(f_0)$	3.0	2.5	2.0	1.78	1.58
$\log \theta(f_0)$ for $\sigma_{\log H/V}(f_0)$	0.48	0.40	0.30	0.25	0.20

Studio Samuel Sangiorgi
 Via Valsellustra 32, 40060 - Dozza (BO)
 info@studiosamuelsangiorgi.eu
 Tel. 0542-640279

Project: Microzonazione Sismica Malalbergo
Location: via Carducci - Malalbergo

CPT: CPTU9
 Total depth: 20.13 m

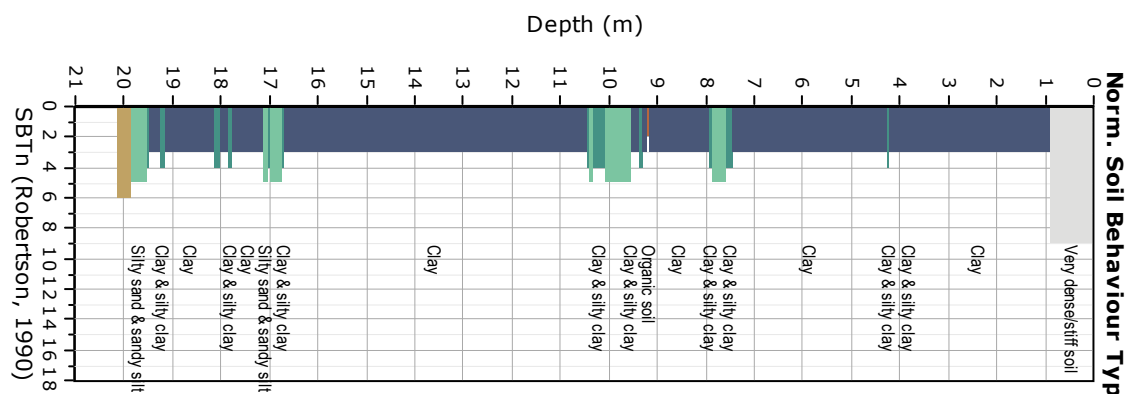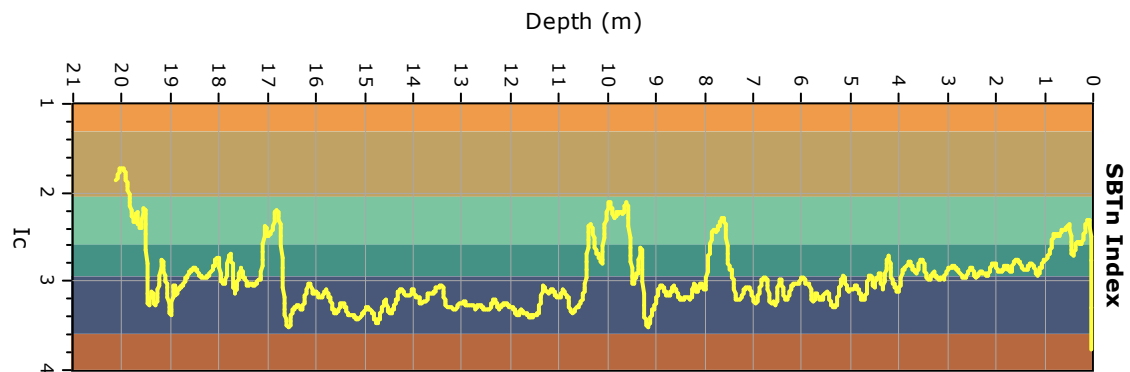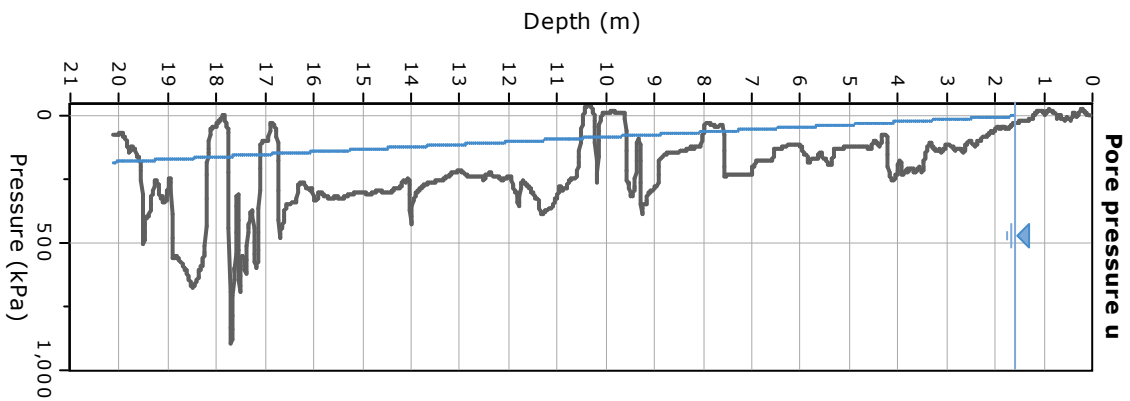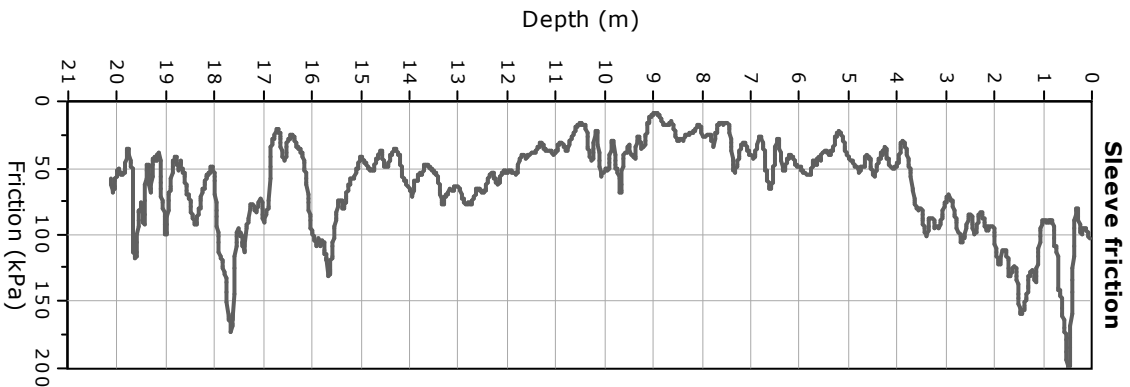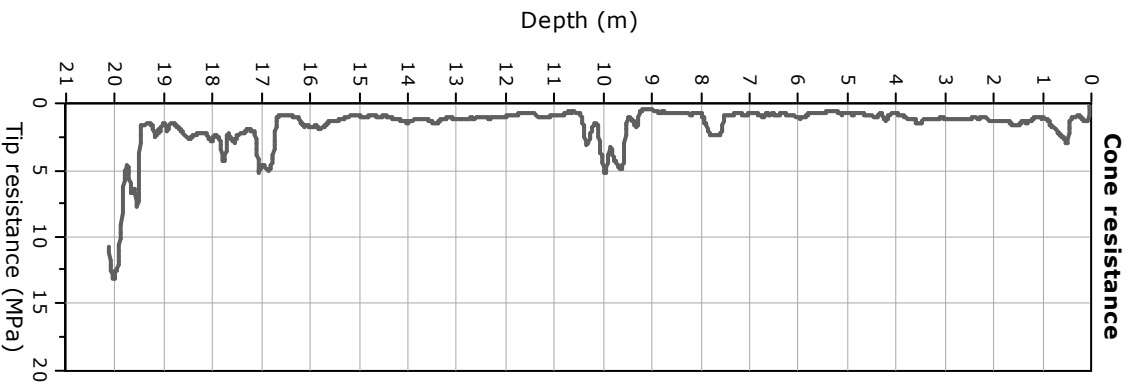

MALALBERGO_MS, MS 2018 TR14

037035P209HVSR265

Instrument: TRZ-0108/01-10

Start recording: 29/03/18 12:53:19 End recording: 29/03/18 13:13:20

Channel labels: NORTH SOUTH; EAST WEST ; UP DOWN

Trace length: 0h20'00". Analyzed 68% trace (manual window selection)

Sampling rate: 128 Hz


Window size: 20 s

Smoothing type: Triangular window


Smoothing: 10%

HORIZONTAL TO VERTICAL SPECTRAL RATIO


Max. H/V at 0.81 ± 0.02 Hz. (In the range 0.1 - 20.0 Hz).

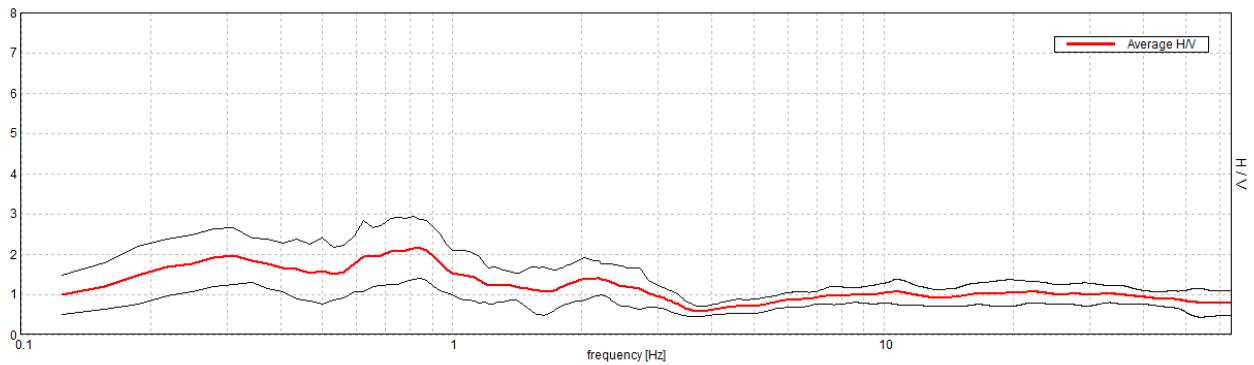


H/V TIME HISTORY

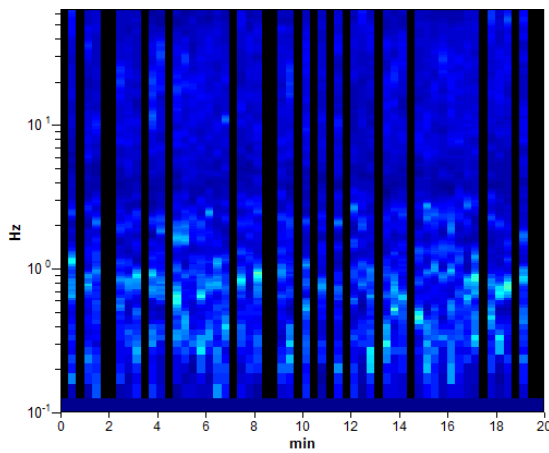

DIRECTIONAL H/V

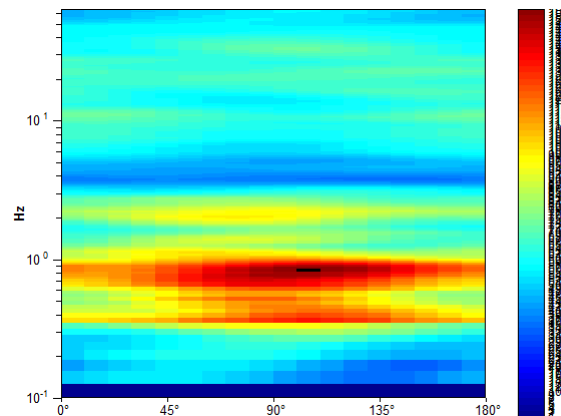

SINGLE COMPONENT SPECTRA

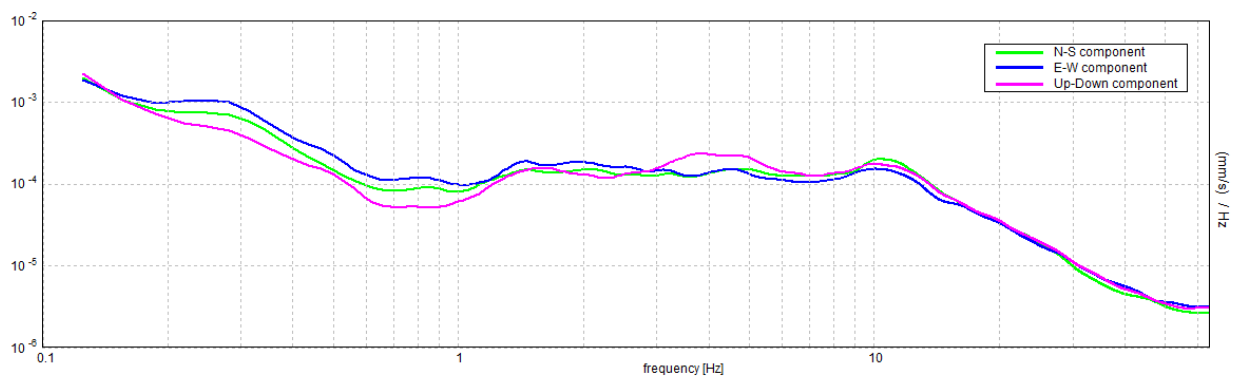

[According to the SESAME, 2005 guidelines. Please read carefully the *Grilla* manual before interpreting the following tables.]

Max. H/V at 0.81 ± 0.02 Hz (in the range 0.1 - 20.0 Hz).

Criteria for a reliable H/V curve

[All 3 should be fulfilled]

$f_0 > 10 / L_w$	$0.81 > 0.50$	OK	
$n_c(f_0) > 200$	$666.3 > 200$	OK	
$\sigma_A(f) < 2$ for $0.5f_0 < f < 2f_0$ if $f_0 > 0.5\text{Hz}$ $\sigma_A(f) < 3$ for $0.5f_0 < f < 2f_0$ if $f_0 < 0.5\text{Hz}$	Exceeded 0 out of 40 times	OK	

Criteria for a clear H/V peak

[At least 5 out of 6 should be fulfilled]

Exists f^- in $[f_0/4, f_0] \mid A_{H/V}(f^-) < A_0 / 2$			NO
Exists f^+ in $[f_0, 4f_0] \mid A_{H/V}(f^+) < A_0 / 2$	2.813 Hz	OK	
$A_0 > 2$	$2.15 > 2$	OK	
$f_{\text{peak}}[A_{H/V}(f) \pm \sigma_A(f)] = f_0 \pm 5\%$	$ 0.01223 < 0.05$	OK	
$\sigma_f < \varepsilon(f_0)$	$0.00994 < 0.12188$	OK	
$\sigma_A(f_0) < \theta(f_0)$	$0.3814 < 2.0$	OK	

L_w	window length
n_w	number of windows used in the analysis
$n_c = L_w n_w f_0$	number of significant cycles
f	current frequency
f_0	H/V peak frequency
σ_f	standard deviation of H/V peak frequency
$\varepsilon(f_0)$	threshold value for the stability condition $\sigma_f < \varepsilon(f_0)$
A_0	H/V peak amplitude at frequency f_0
$A_{H/V}(f)$	H/V curve amplitude at frequency f
f^-	frequency between $f_0/4$ and f_0 for which $A_{H/V}(f^-) < A_0/2$
f^+	frequency between f_0 and $4f_0$ for which $A_{H/V}(f^+) < A_0/2$
$\sigma_A(f)$	standard deviation of $A_{H/V}(f)$, $\sigma_A(f)$ is the factor by which the mean $A_{H/V}(f)$ curve should be multiplied or divided
$\sigma_{\log H/V}(f)$	standard deviation of $\log A_{H/V}(f)$ curve
$\theta(f_0)$	threshold value for the stability condition $\sigma_A(f) < \theta(f_0)$


Threshold values for σ_f and $\sigma_A(f_0)$

Freq. range [Hz]	< 0.2	0.2 – 0.5	0.5 – 1.0	1.0 – 2.0	> 2.0
$\varepsilon(f_0)$ [Hz]	$0.25 f_0$	$0.2 f_0$	$0.15 f_0$	$0.10 f_0$	$0.05 f_0$
$\theta(f_0)$ for $\sigma_A(f_0)$	3.0	2.5	2.0	1.78	1.58
$\log \theta(f_0)$ for $\sigma_{\log H/V}(f_0)$	0.48	0.40	0.30	0.25	0.20

Studio Samuel Sangiorgi
 Via Valsellustra 32, 40060 - Dozza (BO)
 info@studiosamuelsangiorgi.eu
 Tel. 0542-640279

Project: Microzonazione Sismica Malalbergo
Location: via Fontana - Malalbergo

CPT: CPTU10
 Total depth: 20.26 m

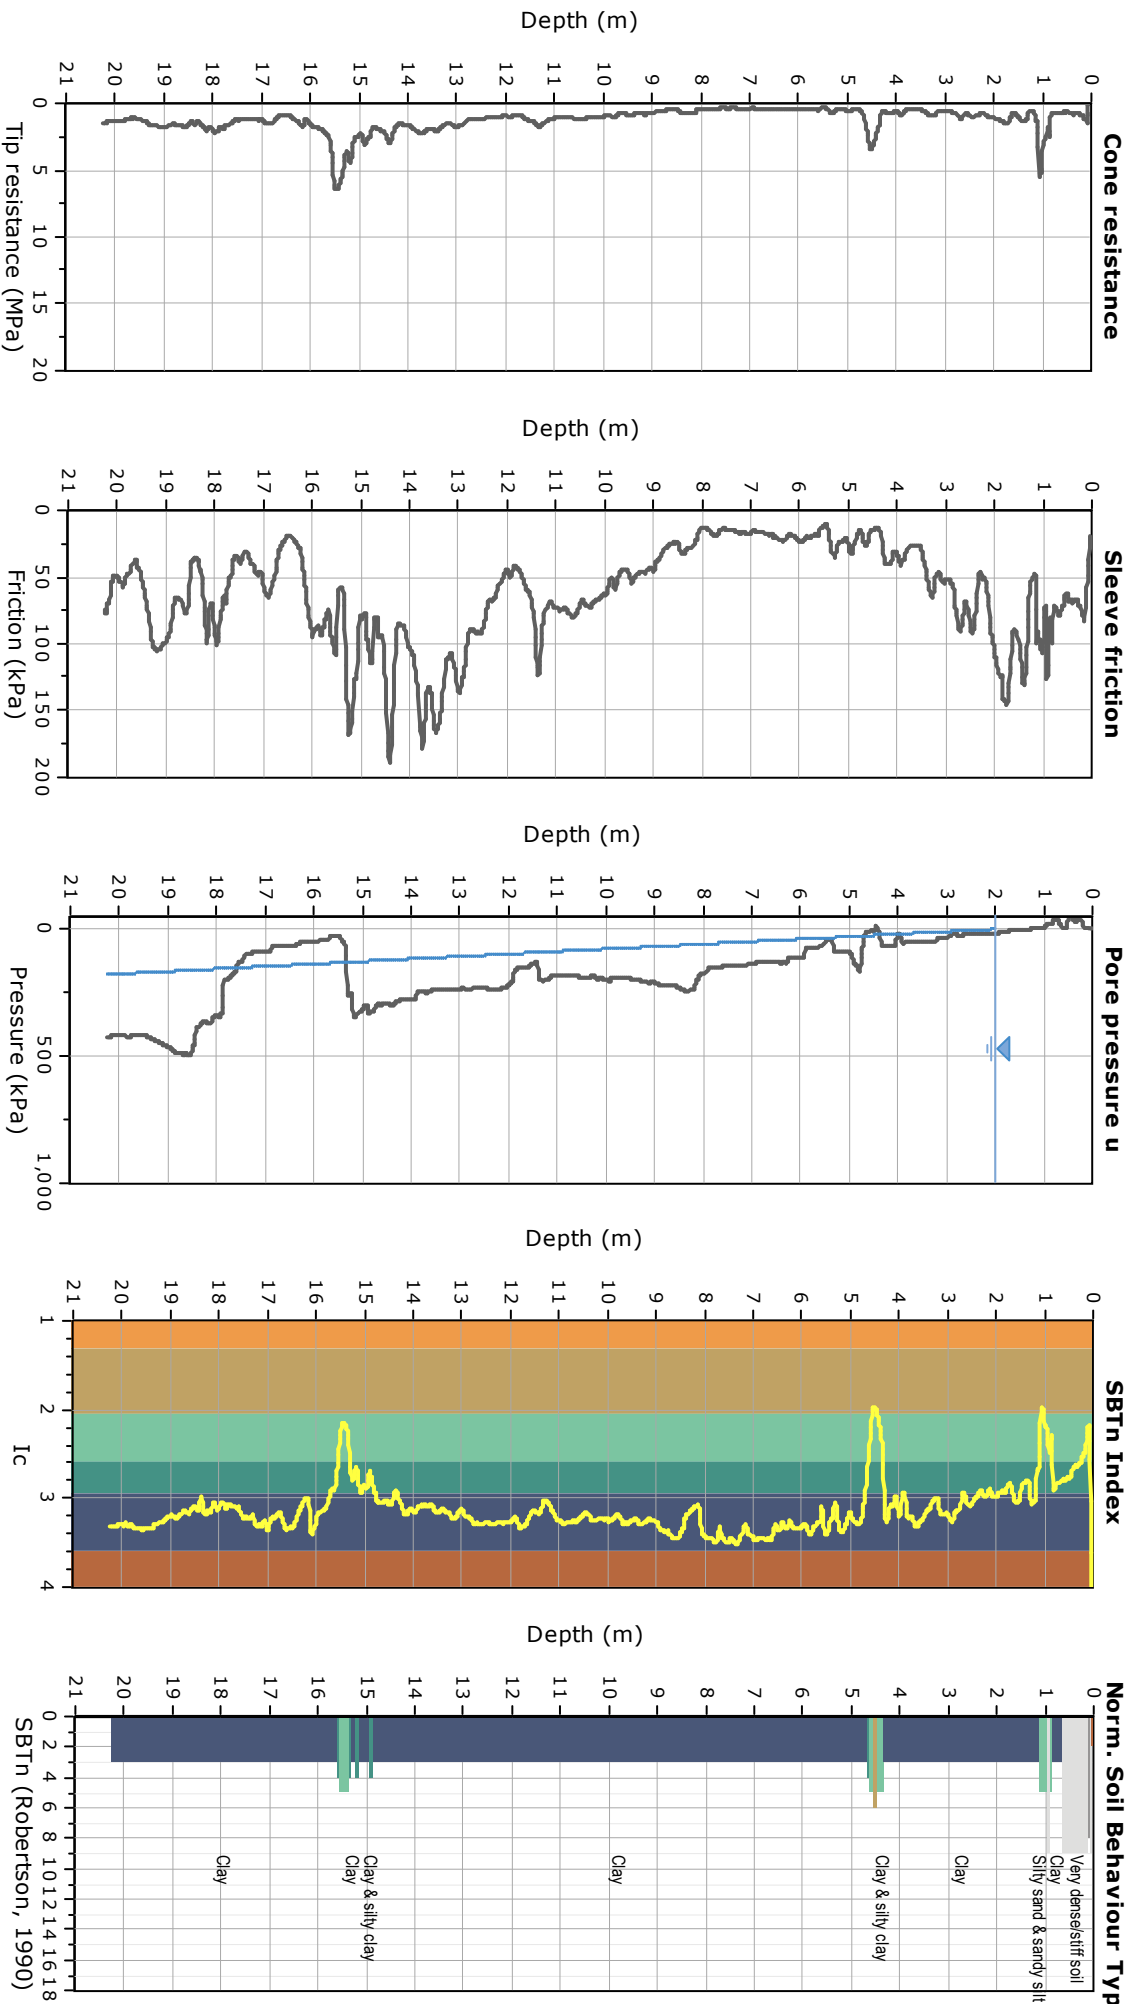

MALALBERGO_MS, MS 2018 TR15

037035P210HVSR267

Instrument: TRZ-0108/01-10

Start recording: 29/03/18 15:23:29 End recording: 29/03/18 15:43:30

Channel labels: NORTH SOUTH; EAST WEST ; UP DOWN

Trace length: 0h20'00". Analyzed 73% trace (manual window selection)

Sampling rate: 128 Hz


Window size: 20 s

Smoothing type: Triangular window


Smoothing: 10%

HORIZONTAL TO VERTICAL SPECTRAL RATIO


Max. H/V at 0.75 ± 0.03 Hz (in the range 0.1 - 20.0 Hz).

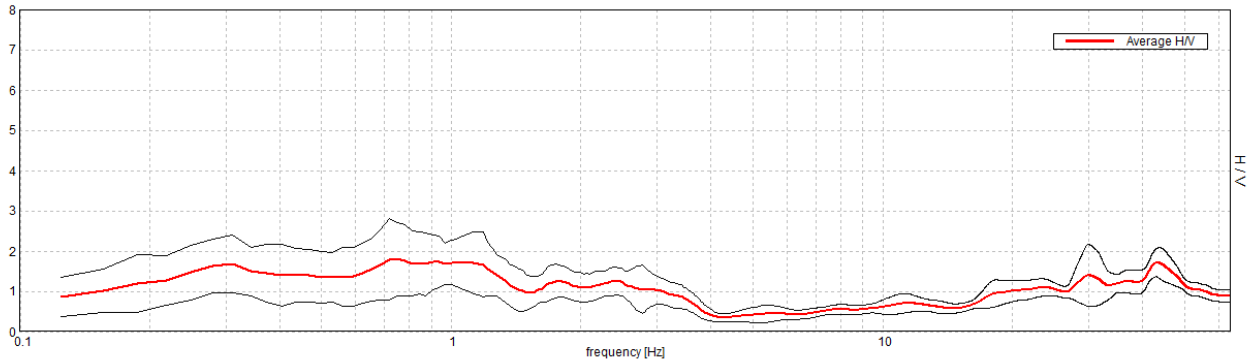


H/V TIME HISTORY

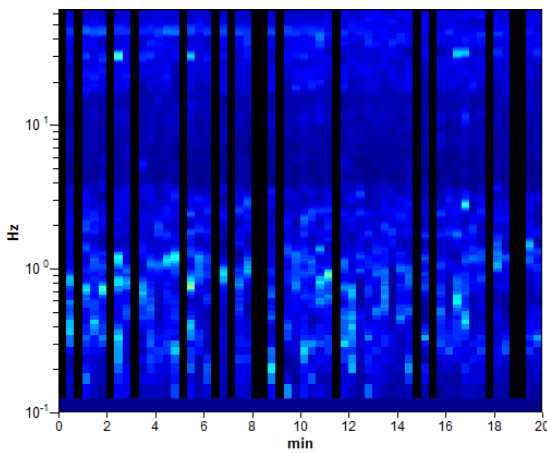

DIRECTIONAL H/V

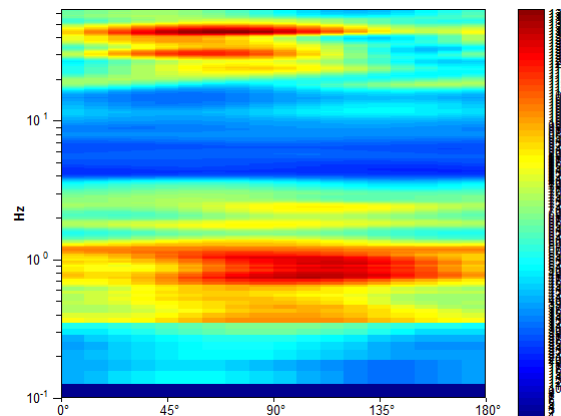

SINGLE COMPONENT SPECTRA

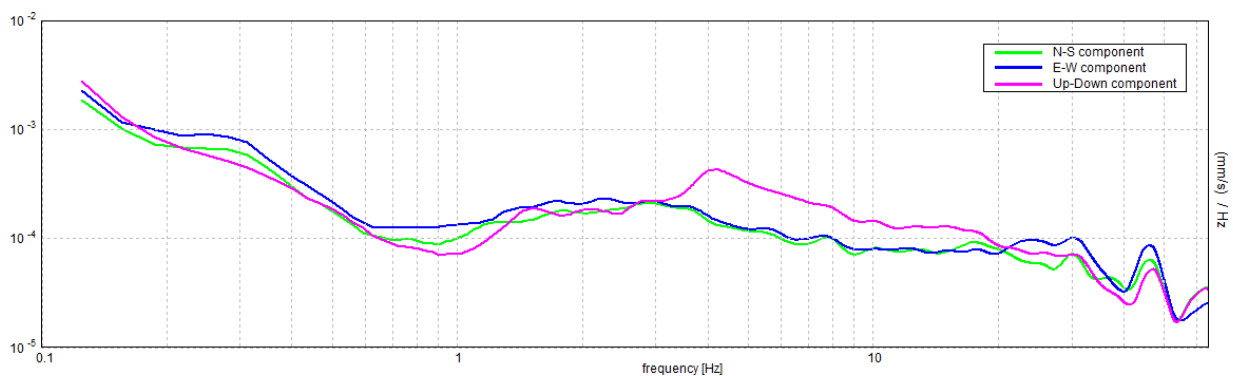

[According to the SESAME, 2005 guidelines. Please read carefully the *Grilla* manual before interpreting the following tables.]

Max. H/V at 0.75 ± 0.03 Hz (in the range 0.1 - 20.0 Hz).

Criteria for a reliable H/V curve

[All 3 should be fulfilled]

$f_0 > 10 / L_w$	$0.75 > 0.50$	OK	
$n_c(f_0) > 200$	$660.0 > 200$	OK	
$\sigma_A(f) < 2$ for $0.5f_0 < f < 2f_0$ if $f_0 > 0.5\text{Hz}$ $\sigma_A(f) < 3$ for $0.5f_0 < f < 2f_0$ if $f_0 < 0.5\text{Hz}$	Exceeded 0 out of 37 times	OK	

Criteria for a clear H/V peak

[At least 5 out of 6 should be fulfilled]

Exists f^- in $[f_0/4, f_0]$ $A_{H/V}(f^-) < A_0 / 2$			NO
Exists f^+ in $[f_0, 4f_0]$ $A_{H/V}(f^+) < A_0 / 2$			NO
$A_0 > 2$	$1.80 > 2$		NO
$f_{\text{peak}}[A_{H/V}(f) \pm \sigma_A(f)] = f_0 \pm 5\%$	$ 0.01667 < 0.05$	OK	
$\sigma_f < \varepsilon(f_0)$	$0.0125 < 0.1125$	OK	
$\sigma_A(f_0) < \theta(f_0)$	$0.4455 < 2.0$	OK	

L_w	window length
n_w	number of windows used in the analysis
$n_c = L_w n_w f_0$	number of significant cycles
f	current frequency
f_0	H/V peak frequency
σ_f	standard deviation of H/V peak frequency
$\varepsilon(f_0)$	threshold value for the stability condition $\sigma_f < \varepsilon(f_0)$
A_0	H/V peak amplitude at frequency f_0
$A_{H/V}(f)$	H/V curve amplitude at frequency f
f^-	frequency between $f_0/4$ and f_0 for which $A_{H/V}(f^-) < A_0/2$
f^+	frequency between f_0 and $4f_0$ for which $A_{H/V}(f^+) < A_0/2$
$\sigma_A(f)$	standard deviation of $A_{H/V}(f)$, $\sigma_A(f)$ is the factor by which the mean $A_{H/V}(f)$ curve should be multiplied or divided
$\sigma_{\log H/V}(f)$	standard deviation of $\log A_{H/V}(f)$ curve
$\theta(f_0)$	threshold value for the stability condition $\sigma_A(f) < \theta(f_0)$

Threshold values for σ_f and $\sigma_A(f_0)$


Freq. range [Hz]	< 0.2	0.2 – 0.5	0.5 – 1.0	1.0 – 2.0	> 2.0
$\varepsilon(f_0)$ [Hz]	$0.25 f_0$	$0.2 f_0$	$0.15 f_0$	$0.10 f_0$	$0.05 f_0$
$\theta(f_0)$ for $\sigma_A(f_0)$	3.0	2.5	2.0	1.78	1.58
$\log \theta(f_0)$ for $\sigma_{\log H/V}(f_0)$	0.48	0.40	0.30	0.25	0.20

PROSPEZIONE SISMICA CON METODOLOGIA ESAC


Località Altedo, Comune di Malalbergo (BO) - 037035P211ESAC_SPAC268

n° tracce	Δt (ms)	T (s)
25	2,0	32,0


Δt : passo di campionamento; T: durata registrazione.

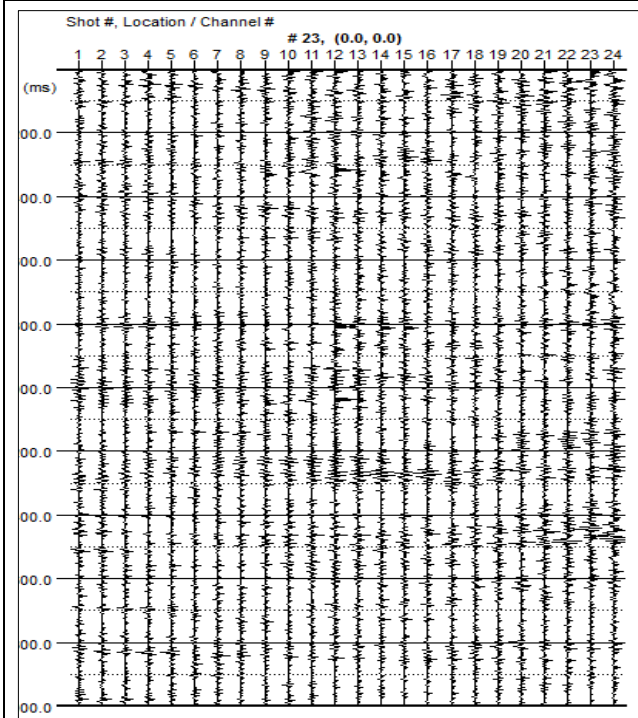


Sismogramma registrato durante le acquisizioni di microtremore sismico. In ascissa il numero dei geofoni, in ordinata il tempo (ms).

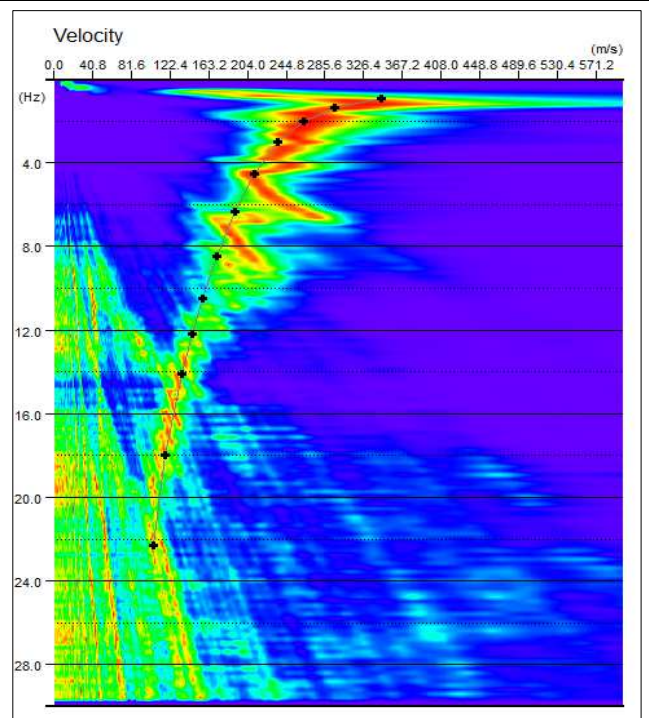

Spettro di potenza nel dominio $f-v$ e Picking della curva sperimentale delle onde R (croci nere).

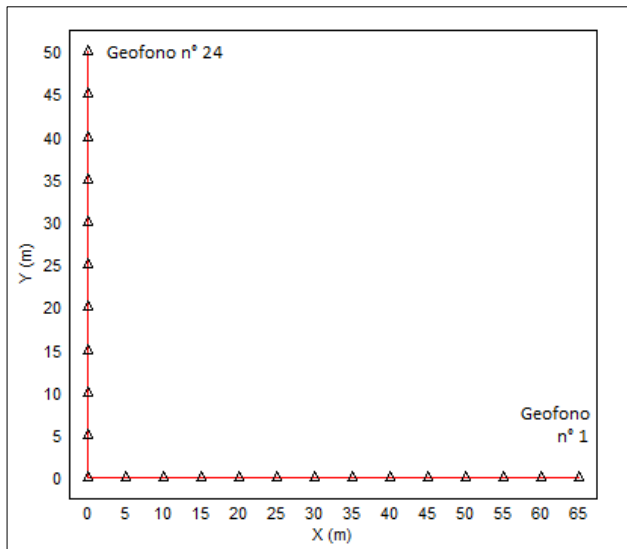

Geometria dello stendimento sismico bidimensionale.

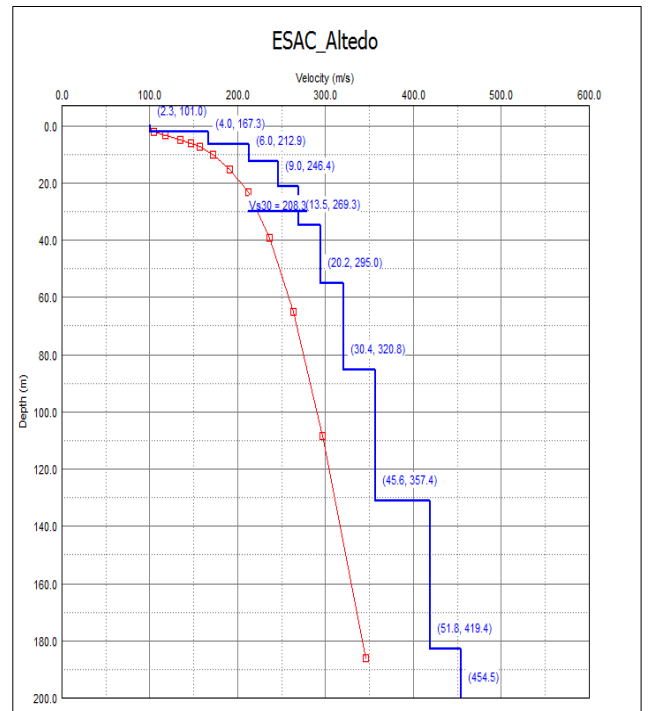

Modello di sottosuolo (1D) descritti in termini di V_s e spessore dei sismostrati (spezzata blu) e curva di dispersione sperimentale delle onde R (curva rossa).

Tabella di sintesi

n. Strato	Profondità letto (m dal p.c.)	Spessore (m)	V _s (m/s)
1	2.3	2.3	101.0
2	6.3	4.0	167.3
3	12.3	6.0	212.9
4	21.3	9.0	246.4
5	34.8	13.5	269.3
6	55.0	20.2	295.0
7	85.4	30.4	320.8
8	131.0	45.6	357.4
9	182.8	51.8	419.4
10	∞	∞	454.5

$$V_{S30} = 208.3 \pm 10\% \text{ [m/s]}$$

Sintesi dei parametri del modello di sottosuolo ottenuto e Valore di Vs30 calcolato.

MALALBERGO_MS, MS 2018 TR7

037035P211HVSR269

Instrument: TRZ-0108/01-10

Start recording: 09/03/18 12:05:11 End recording: 09/03/18 12:25:12

Channel labels: NORTH SOUTH; EAST WEST ; UP DOWN

Trace length: 0h20'00". Analyzed 83% trace (manual window selection)

Sampling rate: 128 Hz


Window size: 20 s

Smoothing type: Triangular window


Smoothing: 10%

HORIZONTAL TO VERTICAL SPECTRAL RATIO


Max. H/V at 0.72 ± 0.04 Hz. (In the range 0.1 - 20.0 Hz).

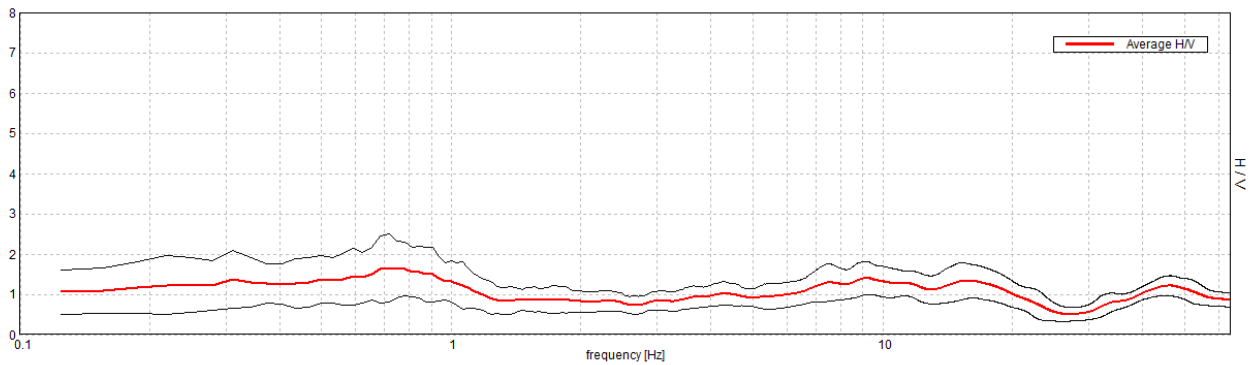


H/V TIME HISTORY

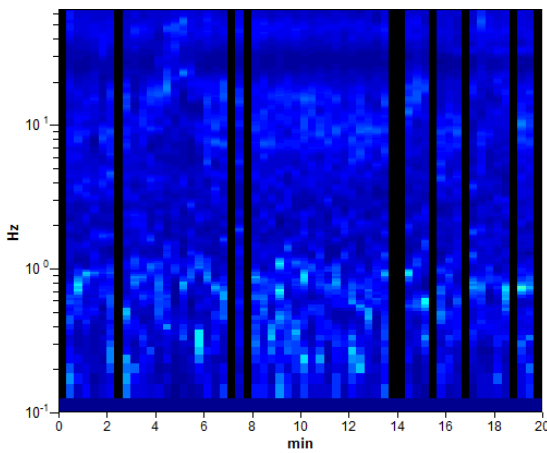

DIRECTIONAL H/V

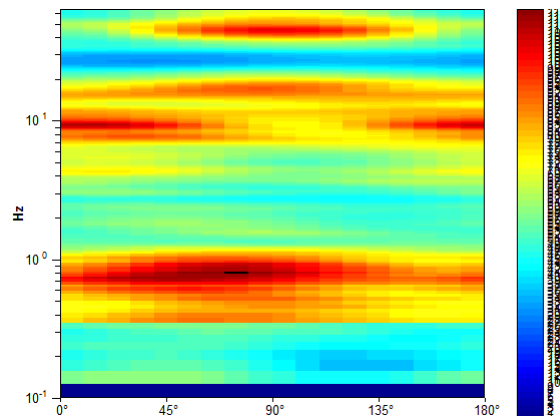

SINGLE COMPONENT SPECTRA

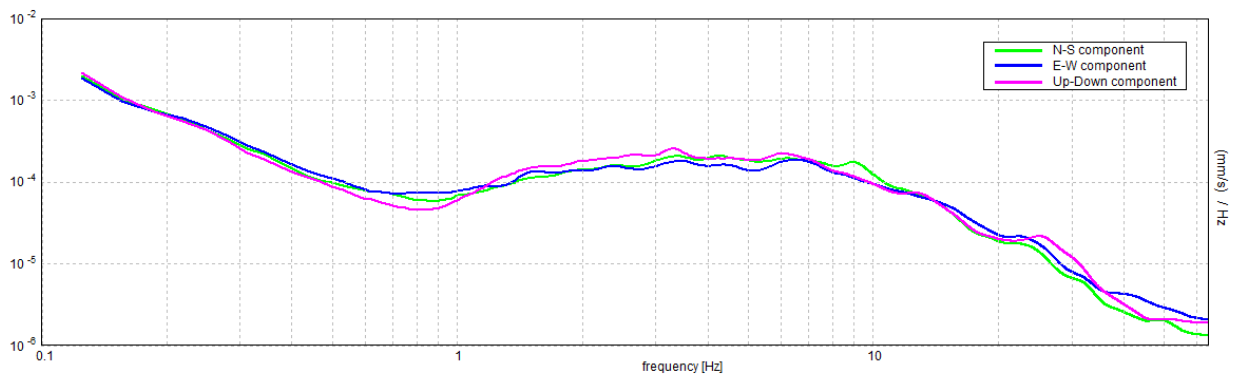

[According to the SESAME, 2005 guidelines. Please read carefully the *Grilla* manual before interpreting the following tables.]

Max. H/V at 0.84 ± 0.04 Hz (in the range 0.1 - 20.0 Hz).

Criteria for a reliable H/V curve

[All 3 should be fulfilled]

$f_0 > 10 / L_w$	$0.84 > 0.17$	OK	
$n_c(f_0) > 200$	$2733.8 > 200$	OK	
$\sigma_A(f) < 2$ for $0.5f_0 < f < 2f_0$ if $f_0 > 0.5\text{Hz}$ $\sigma_A(f) < 3$ for $0.5f_0 < f < 2f_0$ if $f_0 < 0.5\text{Hz}$	Exceeded 0 out of 82 times	OK	

Criteria for a clear H/V peak

[At least 5 out of 6 should be fulfilled]

Exists f^- in $[f_0/4, f_0]$ $A_{H/V}(f^-) < A_0 / 2$			NO
Exists f^+ in $[f_0, 4f_0]$ $A_{H/V}(f^+) < A_0 / 2$	3.016 Hz	OK	
$A_0 > 2$	$2.17 > 2$	OK	
$f_{\text{peak}}[A_{H/V}(f) \pm \sigma_A(f)] = f_0 \pm 5\%$	$ 0.02619 < 0.05$	OK	
$\sigma_f < \varepsilon(f_0)$	$0.0221 < 0.12656$	OK	
$\sigma_A(f_0) < \theta(f_0)$	$0.3539 < 2.0$	OK	

L_w	window length
n_w	number of windows used in the analysis
$n_c = L_w n_w f_0$	number of significant cycles
f	current frequency
f_0	H/V peak frequency
σ_f	standard deviation of H/V peak frequency
$\varepsilon(f_0)$	threshold value for the stability condition $\sigma_f < \varepsilon(f_0)$
A_0	H/V peak amplitude at frequency f_0
$A_{H/V}(f)$	H/V curve amplitude at frequency f
f^-	frequency between $f_0/4$ and f_0 for which $A_{H/V}(f^-) < A_0/2$
f^+	frequency between f_0 and $4f_0$ for which $A_{H/V}(f^+) < A_0/2$
$\sigma_A(f)$	standard deviation of $A_{H/V}(f)$, $\sigma_A(f)$ is the factor by which the mean $A_{H/V}(f)$ curve should be multiplied or divided
$\sigma_{\log H/V}(f)$	standard deviation of $\log A_{H/V}(f)$ curve
$\theta(f_0)$	threshold value for the stability condition $\sigma_A(f) < \theta(f_0)$

Threshold values for σ_f and $\sigma_A(f_0)$


Freq. range [Hz]	< 0.2	0.2 – 0.5	0.5 – 1.0	1.0 – 2.0	> 2.0
$\varepsilon(f_0)$ [Hz]	$0.25 f_0$	$0.2 f_0$	$0.15 f_0$	$0.10 f_0$	$0.05 f_0$
$\theta(f_0)$ for $\sigma_A(f_0)$	3.0	2.5	2.0	1.78	1.58
$\log \theta(f_0)$ for $\sigma_{\log H/V}(f_0)$	0.48	0.40	0.30	0.25	0.20

PROSPEZIONE SISMICA CON METODOLOGIA ESAC


Campo sportivo di Malalbergo (BO) - 037035P2ESAC_SPAC270

n° tracce	Δt (ms)	T (s)
25	2,0	32,0


Δt : passo di campionamento; T: durata registrazione.

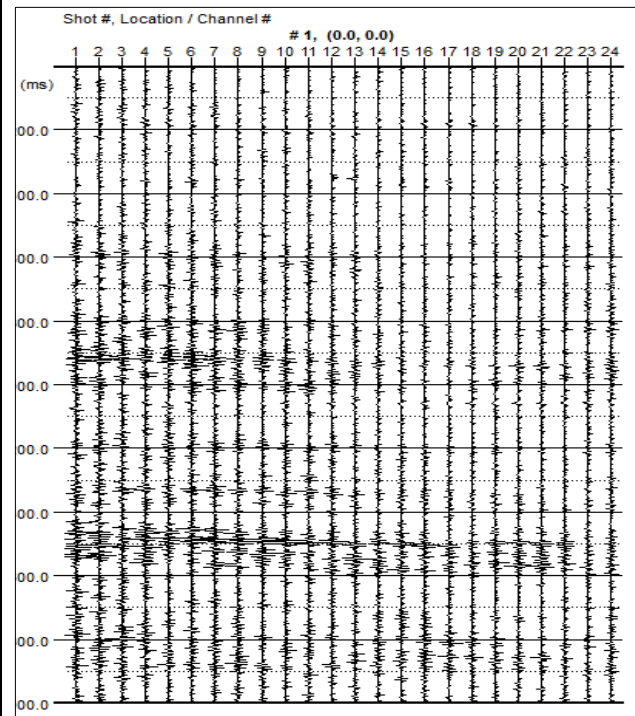


Sismogramma registrato durante le acquisizioni di microtremore sismico. In ascissa il numero dei geofoni, in ordinata il tempo (ms).

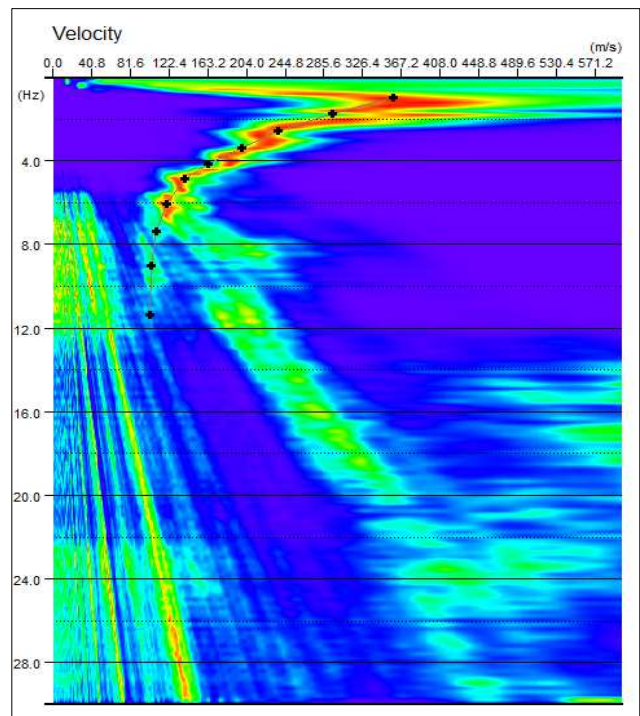

Spettro di potenza nel dominio $f-v$ e Picking della curva sperimentale delle onde R (croci nere).

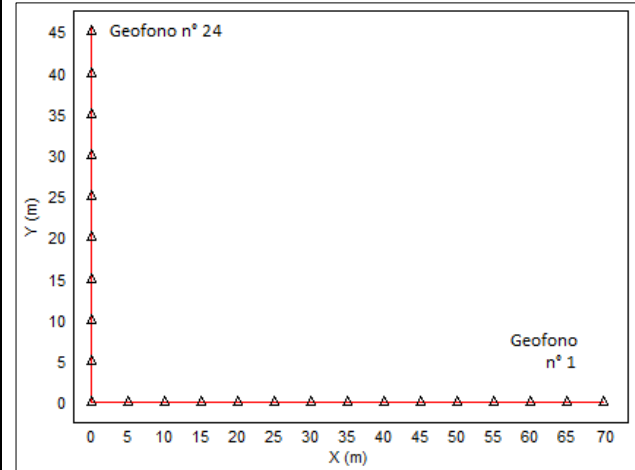

Geometria dello stendimento sismico bidimensionale.

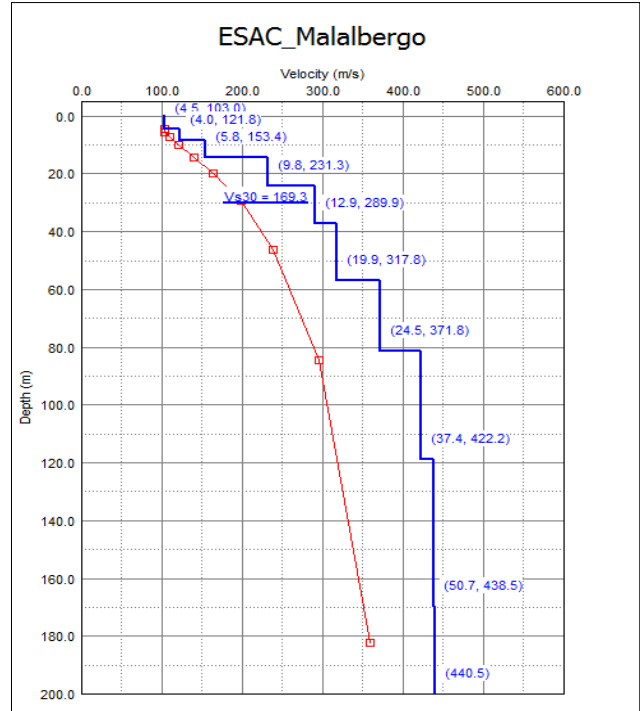

Modello di sottosuolo (1D) descritti in termini di V_s e spessore dei sismostrati (spezzata blu) e curva di dispersione sperimentale delle onde R (curva rossa).

Tabella di sintesi

n. Strato	Profondità letto (m dal p.c.)	Spessore (m)	V _s (m/s)
1	4.5	4.5	103.0
2	8.5	4.0	121.8
3	14.3	5.8	153.4
4	24.1	9.8	231.3
5	37.0	12.9	289.9
6	56.9	19.9	317.8
7	81.4	24.5	371.8
8	118.8	37.4	422.2
9	169.5	50.7	438.5
10	∞	∞	440.5

$$V_{S30} = 169.3 \pm 10\% \text{ [m/s]}$$

Sintesi dei parametri del modello di sottosuolo ottenuto e Valore di Vs30 calcolato.

MALALBERGO_MS, MS 2018 TR8

037035P2HVSR271

Instrument: TRZ-0108/01-10

Start recording: 09/03/18 13:31:20 End recording: 09/03/18 14:31:20

Channel labels: NORTH SOUTH; EAST WEST ; UP DOWN

Trace length: 1h00'00". Analyzed 90% trace (manual window selection)

Sampling rate: 128 Hz


Window size: 60 s

Smoothing type: Triangular window


Smoothing: 10%

HORIZONTAL TO VERTICAL SPECTRAL RATIO


Max. H/V at 0.84 ± 0.04 Hz. (In the range 0.1 - 20.0 Hz).

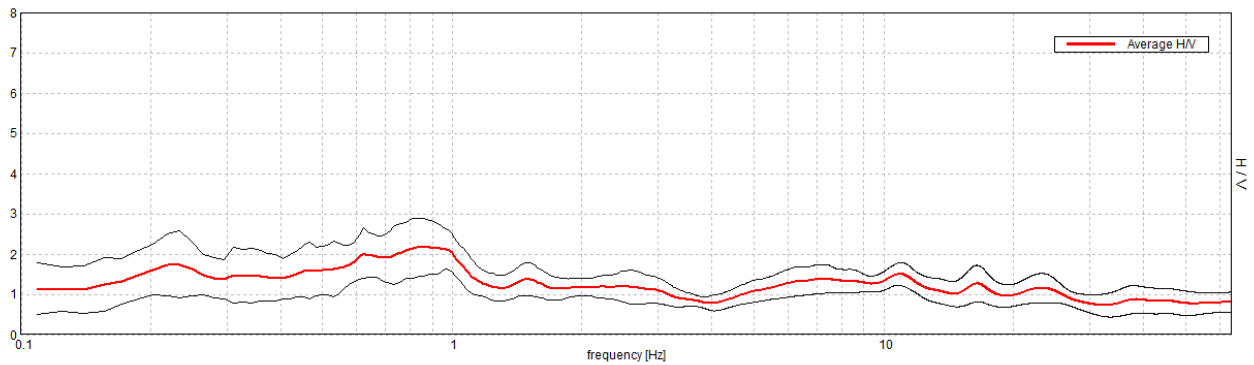


H/V TIME HISTORY

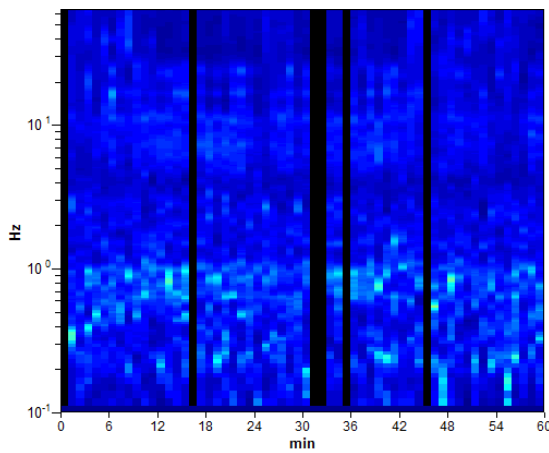

DIRECTIONAL H/V

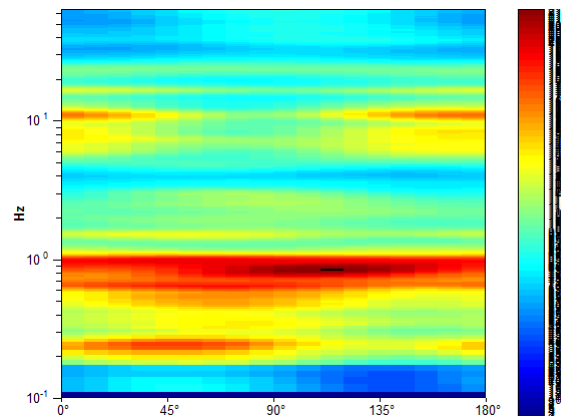

SINGLE COMPONENT SPECTRA

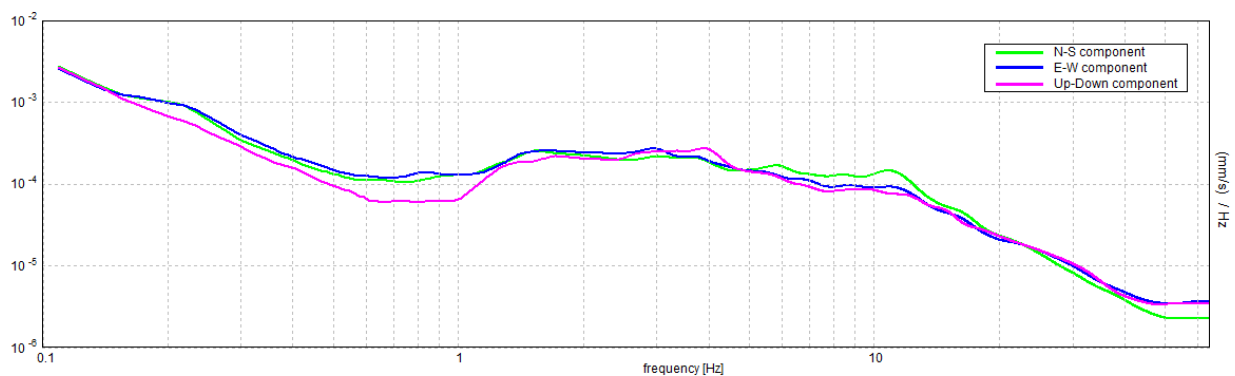

[According to the SESAME, 2005 guidelines. Please read carefully the *Grilla* manual before interpreting the following tables.]

Max. H/V at 0.72 ± 0.04 Hz (in the range 0.1 - 20.0 Hz).

Criteria for a reliable H/V curve

[All 3 should be fulfilled]

$f_0 > 10 / L_w$	$0.72 > 0.50$	OK	
$n_c(f_0) > 200$	$718.8 > 200$	OK	
$\sigma_A(f) < 2$ for $0.5f_0 < f < 2f_0$ if $f_0 > 0.5\text{Hz}$ $\sigma_A(f) < 3$ for $0.5f_0 < f < 2f_0$ if $f_0 < 0.5\text{Hz}$	Exceeded 0 out of 36 times	OK	

Criteria for a clear H/V peak

[At least 5 out of 6 should be fulfilled]

Exists f^- in $[f_0/4, f_0] \mid A_{H/V}(f^-) < A_0 / 2$			NO
Exists f^+ in $[f_0, 4f_0] \mid A_{H/V}(f^+) < A_0 / 2$	1.906 Hz	OK	
$A_0 > 2$	$1.66 > 2$		NO
$f_{\text{peak}}[A_{H/V}(f) \pm \sigma_A(f)] = f_0 \pm 5\%$	$ 0.02753 < 0.05$	OK	
$\sigma_f < \varepsilon(f_0)$	$0.01978 < 0.10781$	OK	
$\sigma_A(f_0) < \theta(f_0)$	$0.4172 < 2.0$	OK	

L_w	window length
n_w	number of windows used in the analysis
$n_c = L_w n_w f_0$	number of significant cycles
f	current frequency
f_0	H/V peak frequency
σ_f	standard deviation of H/V peak frequency
$\varepsilon(f_0)$	threshold value for the stability condition $\sigma_f < \varepsilon(f_0)$
A_0	H/V peak amplitude at frequency f_0
$A_{H/V}(f)$	H/V curve amplitude at frequency f
f^-	frequency between $f_0/4$ and f_0 for which $A_{H/V}(f^-) < A_0/2$
f^+	frequency between f_0 and $4f_0$ for which $A_{H/V}(f^+) < A_0/2$
$\sigma_A(f)$	standard deviation of $A_{H/V}(f)$, $\sigma_A(f)$ is the factor by which the mean $A_{H/V}(f)$ curve should be multiplied or divided
$\sigma_{\log H/V}(f)$	standard deviation of $\log A_{H/V}(f)$ curve
$\theta(f_0)$	threshold value for the stability condition $\sigma_A(f) < \theta(f_0)$

Threshold values for σ_f and $\sigma_A(f_0)$

Freq. range [Hz]	< 0.2	0.2 – 0.5	0.5 – 1.0	1.0 – 2.0	> 2.0
$\varepsilon(f_0)$ [Hz]	$0.25 f_0$	$0.2 f_0$	$0.15 f_0$	$0.10 f_0$	$0.05 f_0$
$\theta(f_0)$ for $\sigma_A(f_0)$	3.0	2.5	2.0	1.78	1.58
$\log \theta(f_0)$ for $\sigma_{\log H/V}(f_0)$	0.48	0.40	0.30	0.25	0.20



via A. Ascari 6 - 44019 Gualdo di Voghiera (FE)

tel. 0532 773136-815683 Fax 0532 776455

info@songeo.it - ww.songeo.it

Decreto di concessione n° 56718 del 17.09.2007, per il rilascio dei certificati relativi alle prove geotecniche in sito (settore c), ai sensi del D.P.R. 06.06.2001 n° 380 e Circolare 349/STC del 16.12.1999

Certificazione UNI EN ISO 9001 N° 17493 rilasciata da Certiquality


CERTIFICATO DI PROVA

CERTIFICATO N°	07/18	Data	27/02/2018	N° COMMESSA	15/18	Data	08/02/2018
-----------------------	-------	-------------	------------	--------------------	-------	-------------	------------

COMMITTENTE:	Dott.Geol. Samuel Sangiorgi
LOCALITA':	Pegola di Malalbergo (BO)
CANTIERE:	Via Gotti
SCPTU N°	1
Specifiche di prova:	ASTM D 5778-07; AGI 1977
Attrezzatura:	Penetrometro PAGANI TG 63-200
Procedure:	PRO E05
Attrezzi:	Punta elettrica e piezocono sismico
DATA ESECUZIONE PROVA	08/02/2018
QUOTA INIZIO PROVA	p.c.
PROFONDITA' DELLA PROVA	35,00 m
PROFONDITA' DELLA FALDA	2,05 m da p.c.

ANNOTAZIONI:

COROGRAFIA E PLANIMETRIA:

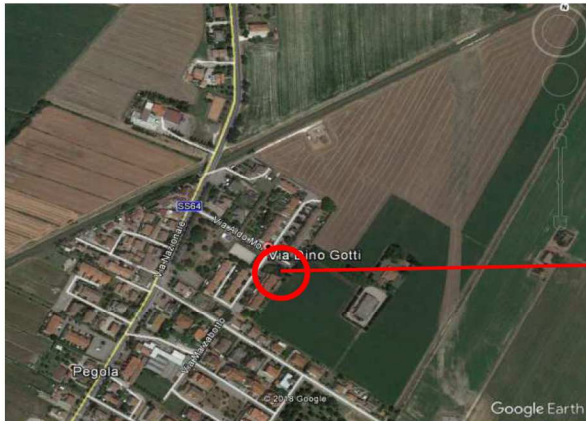

IL PRESENTE CERTIFICATO SI COMPONE DI:

3 PAGINE

Sperimentatore

Direttore





Qc [MPa]


Fs [kPa]

U2 [kPa]

Rf [%]

— Qc — Fs — U2 — Rf — U0 — U2 — U0

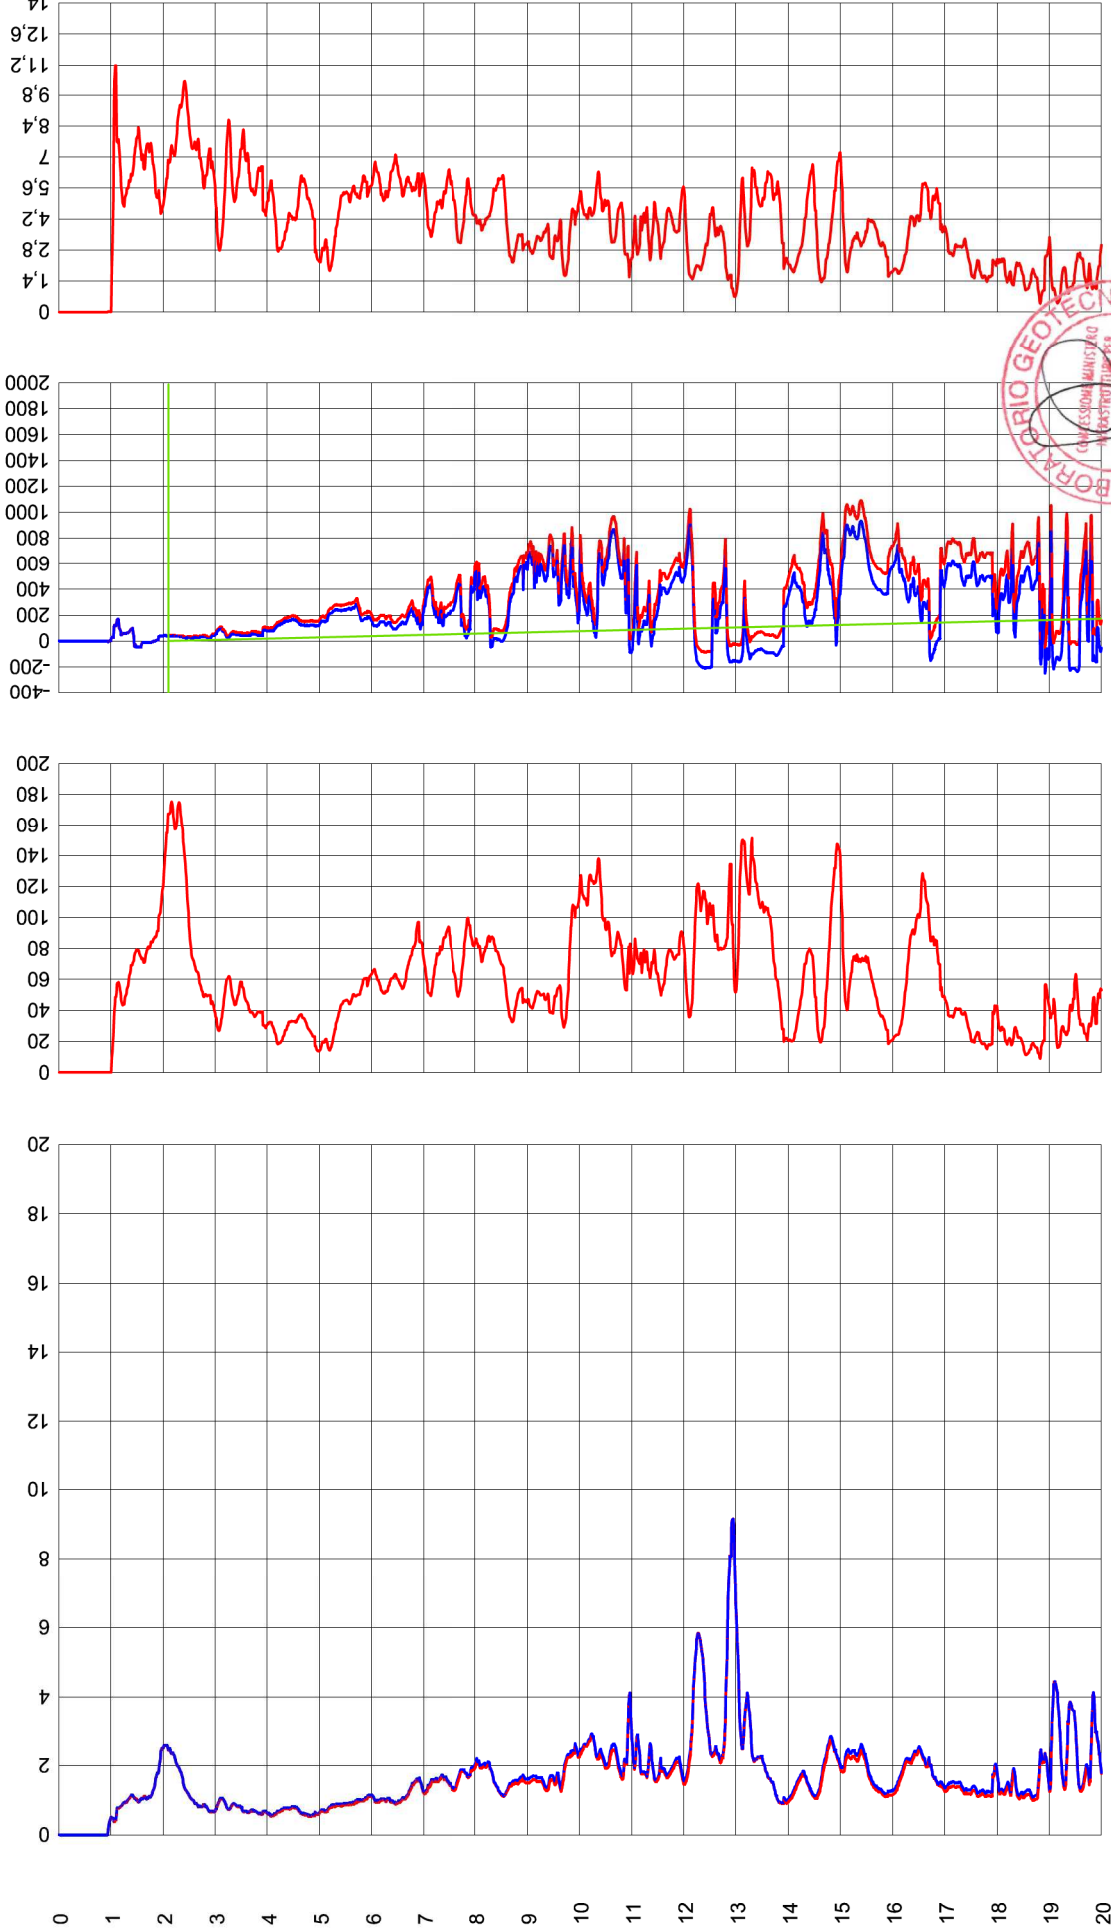

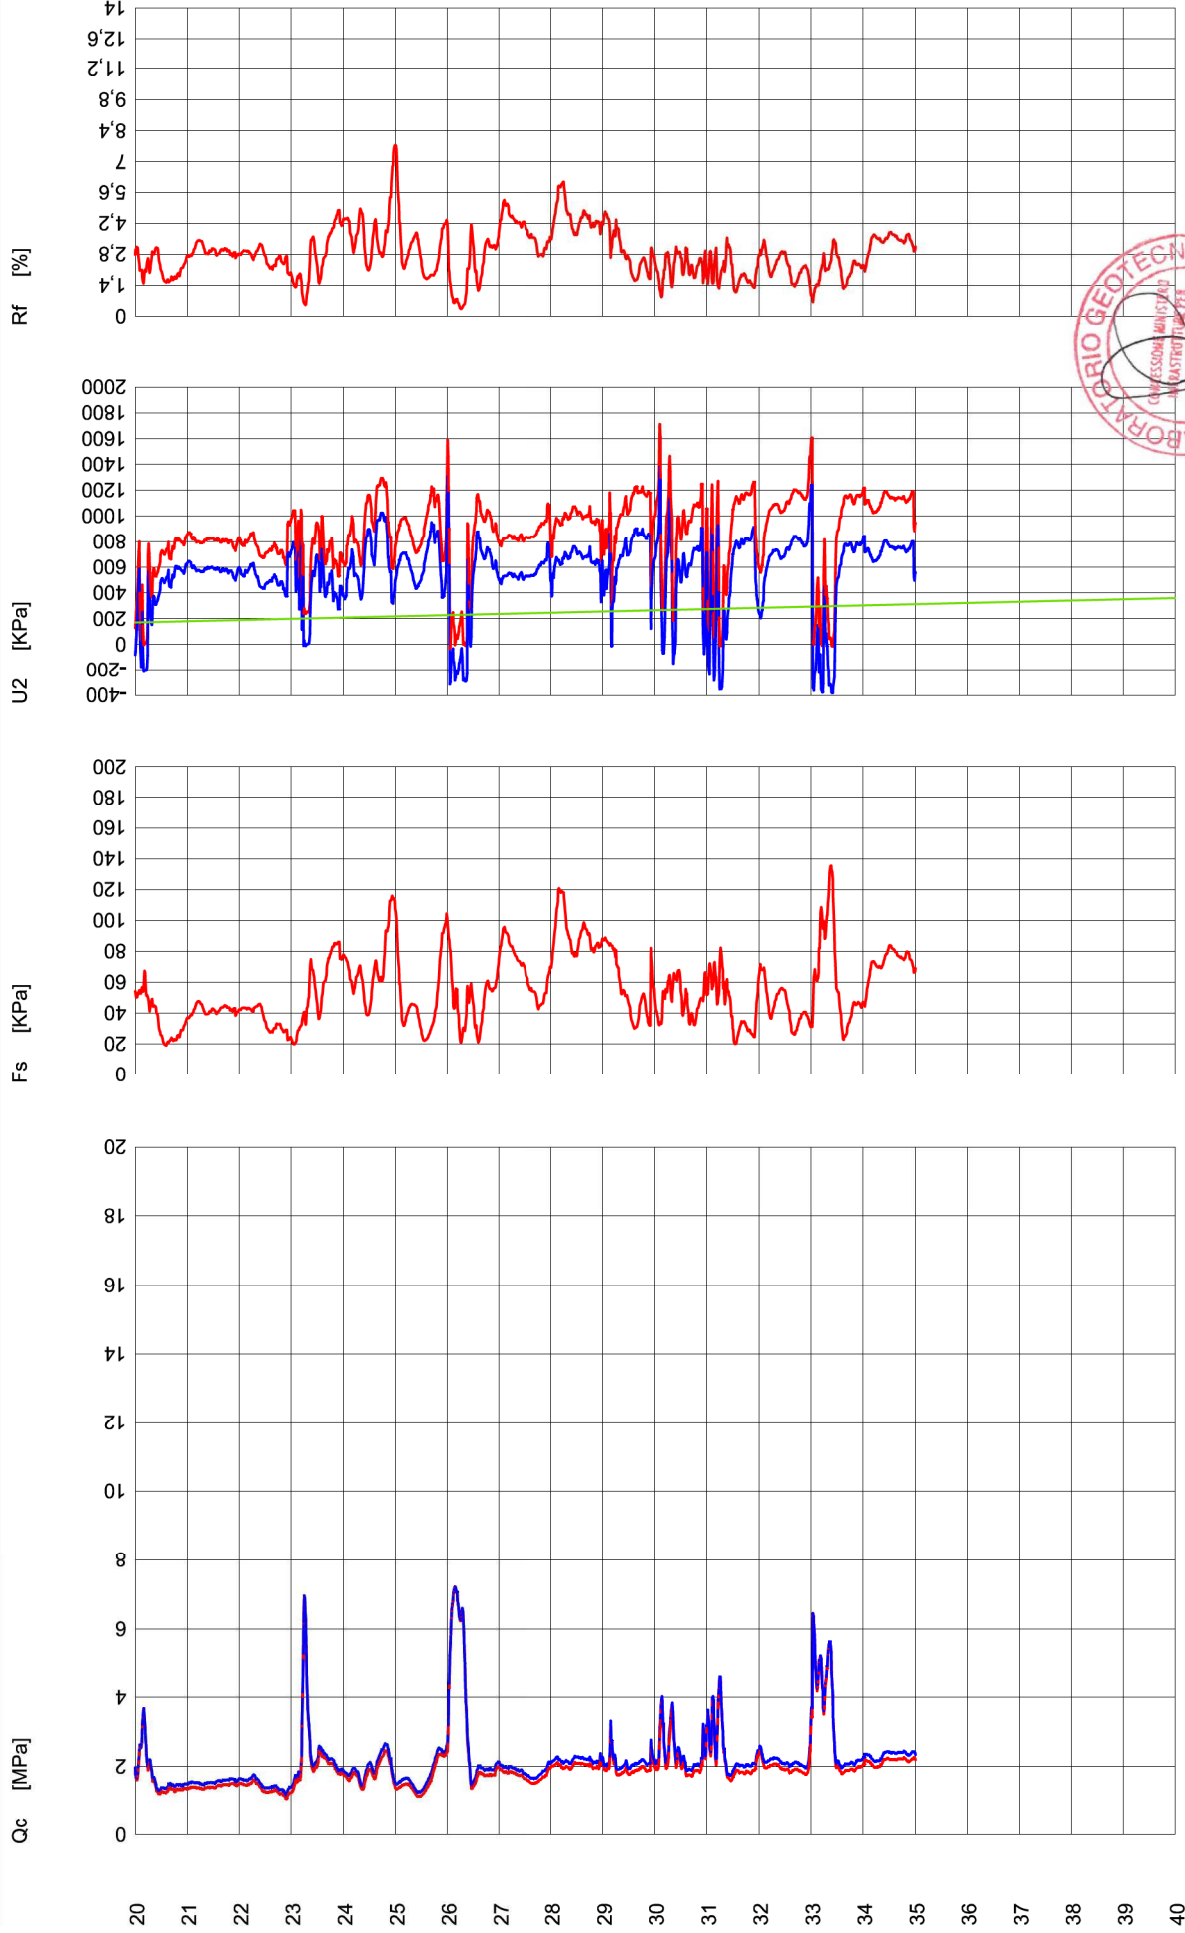

PROVA N°:	SCPTU 1
------------------	---------

DATA:	08/02/18
--------------	----------


COMMITTENTE:	Dott. Geol. Samuel Sangiorgi
---------------------	------------------------------

LOCALITA':	via Gotti Pegola (BO)
-------------------	-----------------------

PROFONDITA' DELLA PROVA:	35,00 m
PROFONDITA' DELLA FALDA:	2,05 m
PREFORO:	0,98 m

Profondità (m)	Velocità (m/sec)
1,50	126,88
2,50	156,44
3,50	106,12
4,50	118,38
5,50	156,06
6,50	163,97
7,50	199,62
8,50	192,02
9,50	189,62
10,50	204,15
11,50	210,41
12,50	222,98
13,50	238,47
14,50	224,26
15,50	245,79
16,50	205,40
17,50	217,32
18,50	211,20
19,50	223,82
20,50	244,17
21,50	217,34
22,50	212,29
23,50	217,25
24,50	220,25
25,50	244,73
26,50	254,20
27,50	254,58
28,50	260,64
29,50	248,07
30,50	237,50
31,50	245,88
32,50	248,59
33,50	250,75
34,50	257,25

GRAFICO ONDE S

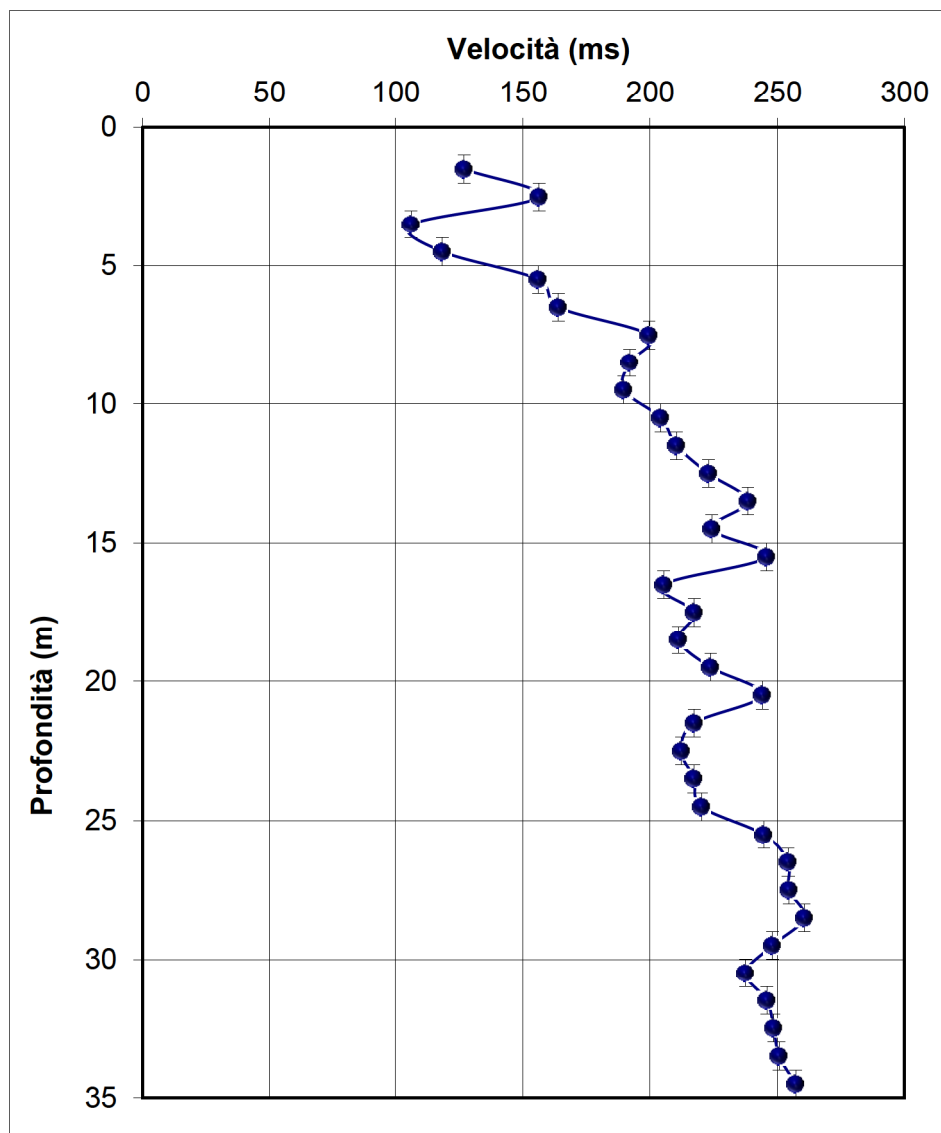

Vs₃₀ (m/sec):	208,10
---------------------------------	--------

Categoria suolo di fondazione:	C
---------------------------------------	---

Vs₃₀ (m/sec):	208,10
---------------------------------	--------

Categoria suolo di fondazione:	C
---------------------------------------	---





via A. Ascari 6 - 44019 Gualdo di Voghiera (FE)

tel. 0532 773136-815683 Fax 0532 776455

info@songeo.it - www.songeo.it

Decreto di concessione n° 56718 del 17.09.2007, per il rilascio dei certificati relativi alle prove geotecniche in sito (settore c), ai sensi del D.P.R. 06.06.2001 n° 380 e Circolare 349/STC del 16.12.1999

Certificazione UNI EN ISO 9001 N° 17493 rilasciata da Certiquality

CERTIFICATO DI PROVA


CERTIFICATO N°	34/18	Data	03/04/2018	N° COMMESSA	15/18	Data	08/02/2018
-----------------------	-------	-------------	------------	--------------------	-------	-------------	------------

COMMITTENTE:	Dott. Geol. Samuel Sangiorgi
LOCALITA':	Malalbergo (BO)
CANTIERE:	Via Lavinia Fontana
SCPTU N°	2
Specifiche di prova:	ASTM D 5778-07; AGI 1977
Attrezzatura:	Penetrometro PAGANI TG 63-200
Procedure:	PRO E05
Attrezzi:	Punta elettrica e piezocono sismico
DATA ESECUZIONE PROVA	03/04/2018
QUOTA INIZIO PROVA	p.c.
PROFONDITA' DELLA PROVA	23,00 m
PROFONDITA' DELLA FALDA	0,70 m da p.c.

ANNOTAZIONI:

Prova interrotta per disancoraggio dello strumento a 23.00 m

COROGRAFIA E PLANIMETRIA:

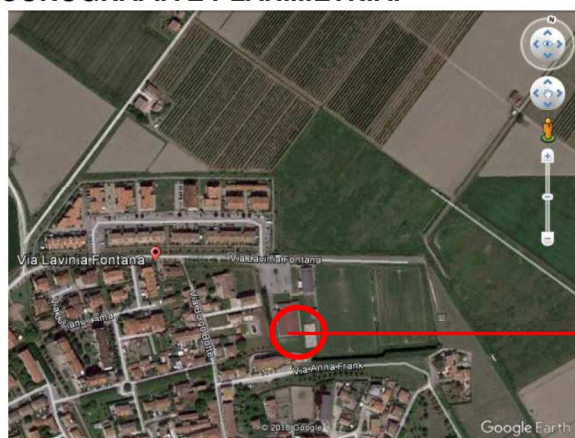

IL PRESENTE CERTIFICATO SI COMPONE DI:



3 PAGINE

Sperimentatore


Direttore




Sito: Comune Malalbergo (BO) - Test: scptu 2 Profondità falda: -1,30 m da p.c.

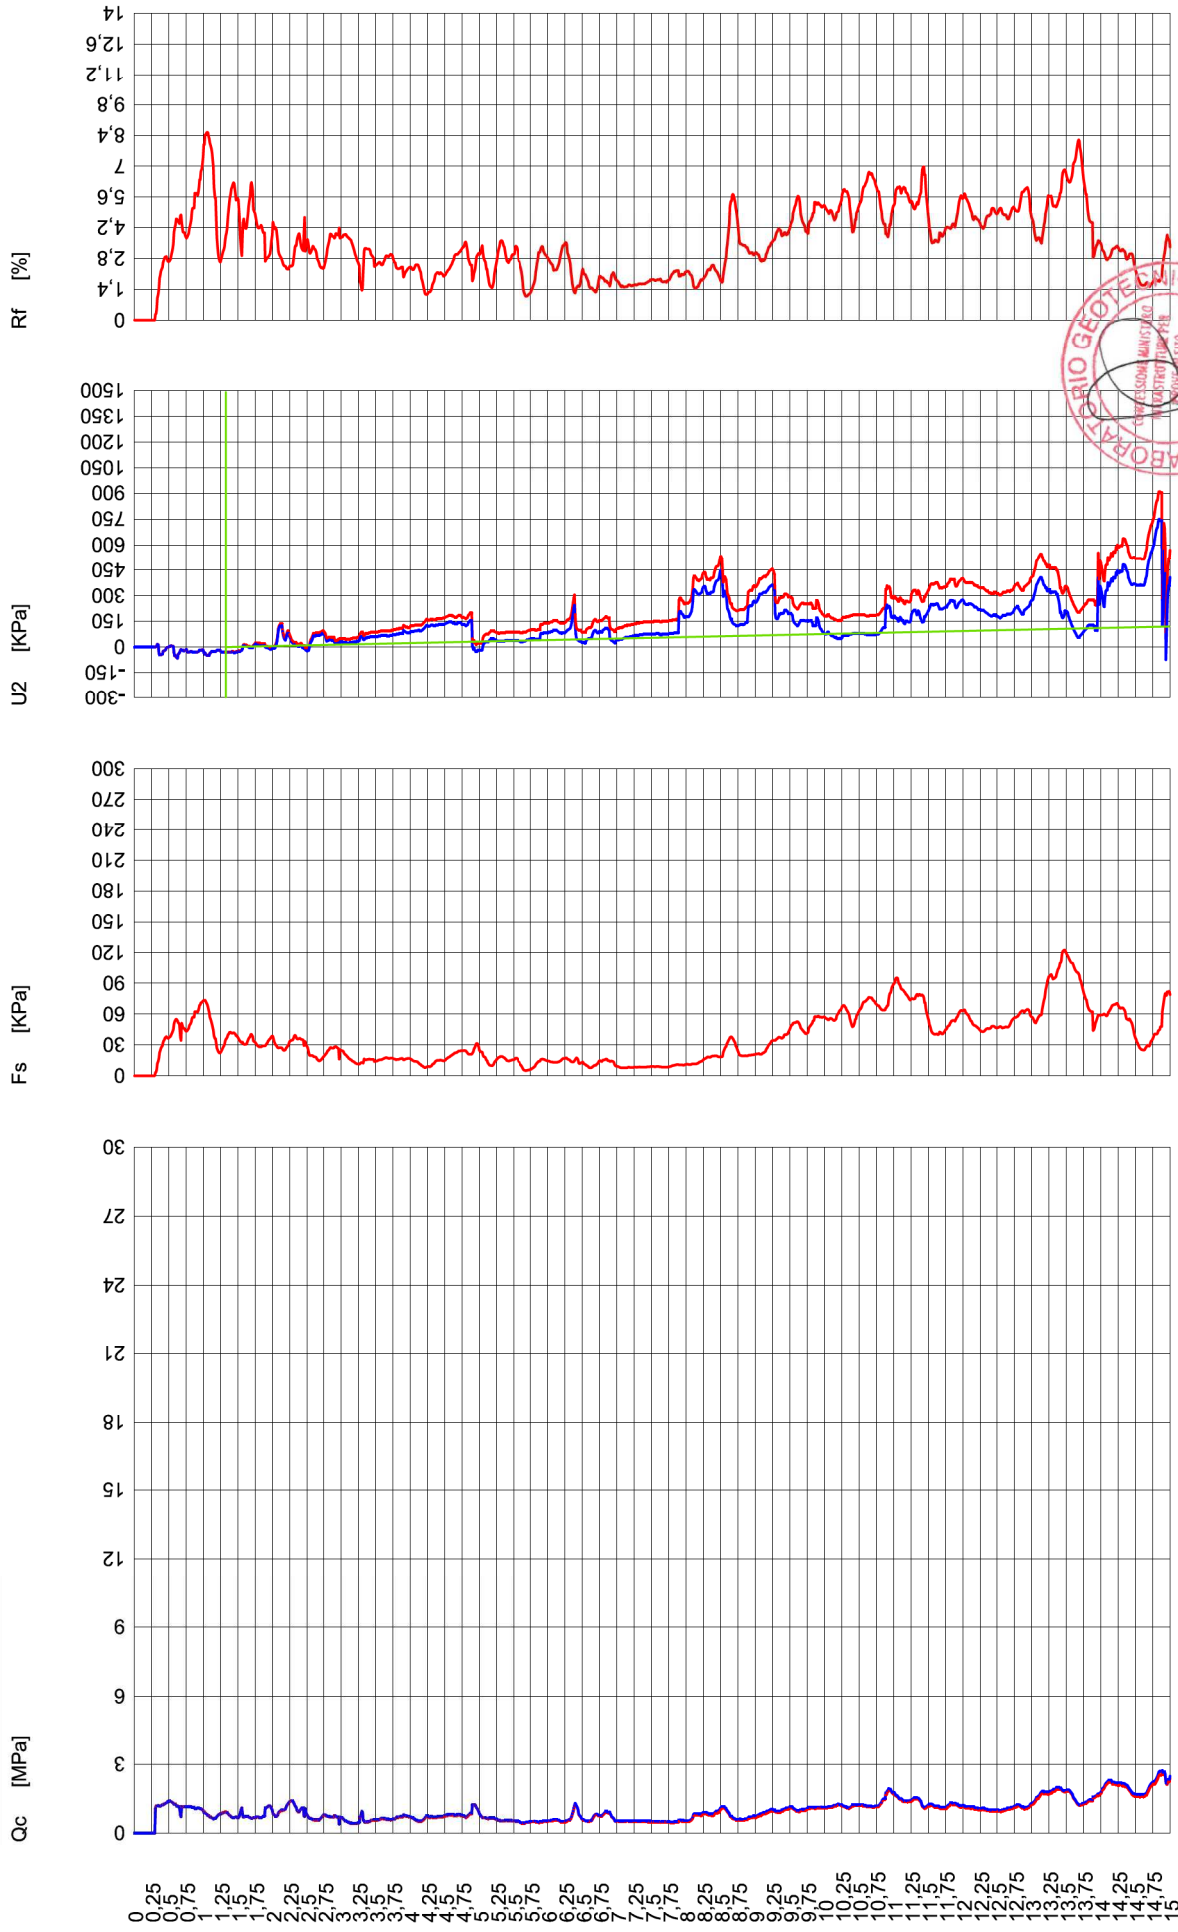


Qc [MPa]

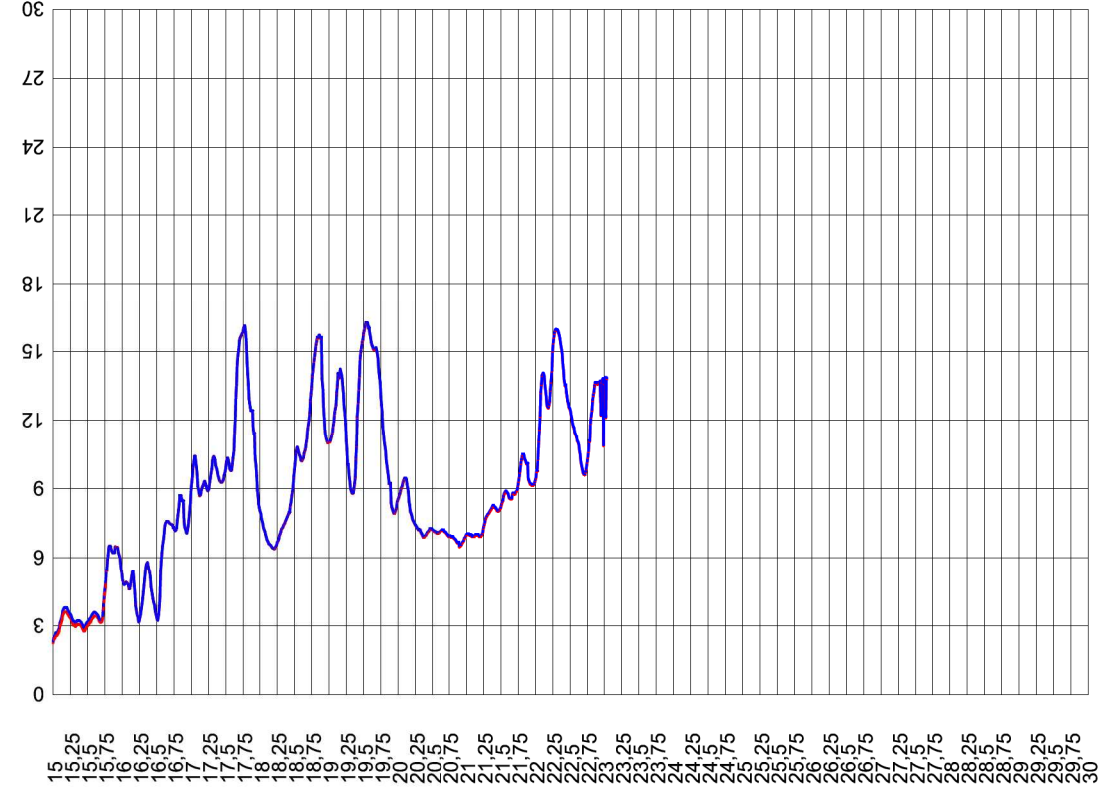



Fs [kPa]

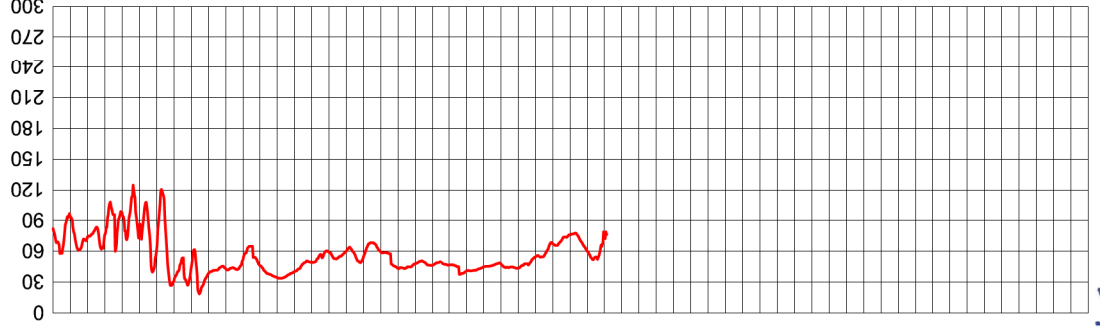

U2 [kPa]

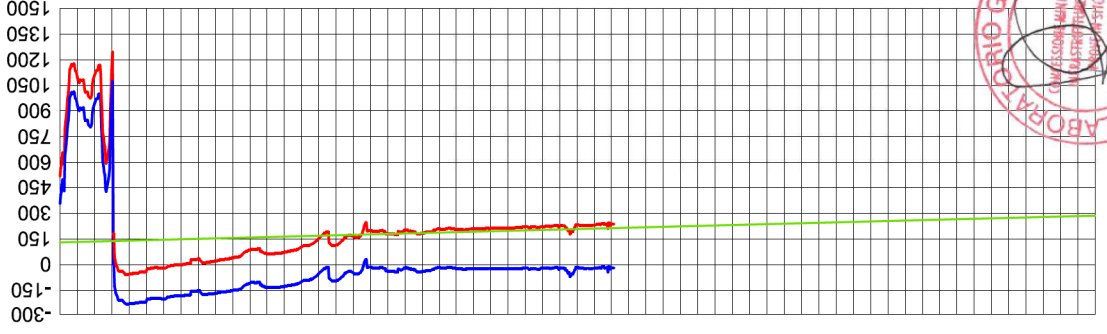

Rf [%]

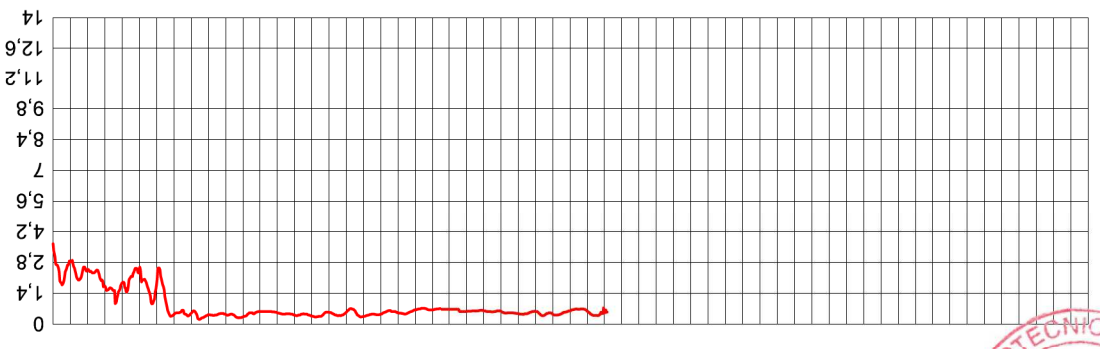

PROVA N°:	SCPTU 2
------------------	---------

DATA:	03/04/2018
--------------	------------

COMMITTENTE:	dott. geol. Samuel Sangiorgi
---------------------	------------------------------


LOCALITA':	Malalbergo (BO) bocciodromo
-------------------	-----------------------------

PROFONDITA' DELLA PROVA:	23,00 m
--------------------------	---------

PROFONDITA' DELLA FALDA:	1,30 m
--------------------------	--------

PREFORO:	0,30 m
----------	--------

Profondità (m)	Velocità (m/sec)
1,50	105,10
2,50	151,60
3,50	142,86
4,50	147,10
5,50	163,92
6,50	155,68
7,50	146,11
8,50	156,10
9,50	163,82
10,50	173,82
11,50	168,27
12,50	170,32
13,50	186,14
14,50	181,48
15,50	205,38
16,50	260,24
17,50	262,67
18,50	254,15
19,50	263,09
20,50	254,17
21,50	249,94
22,50	249,95

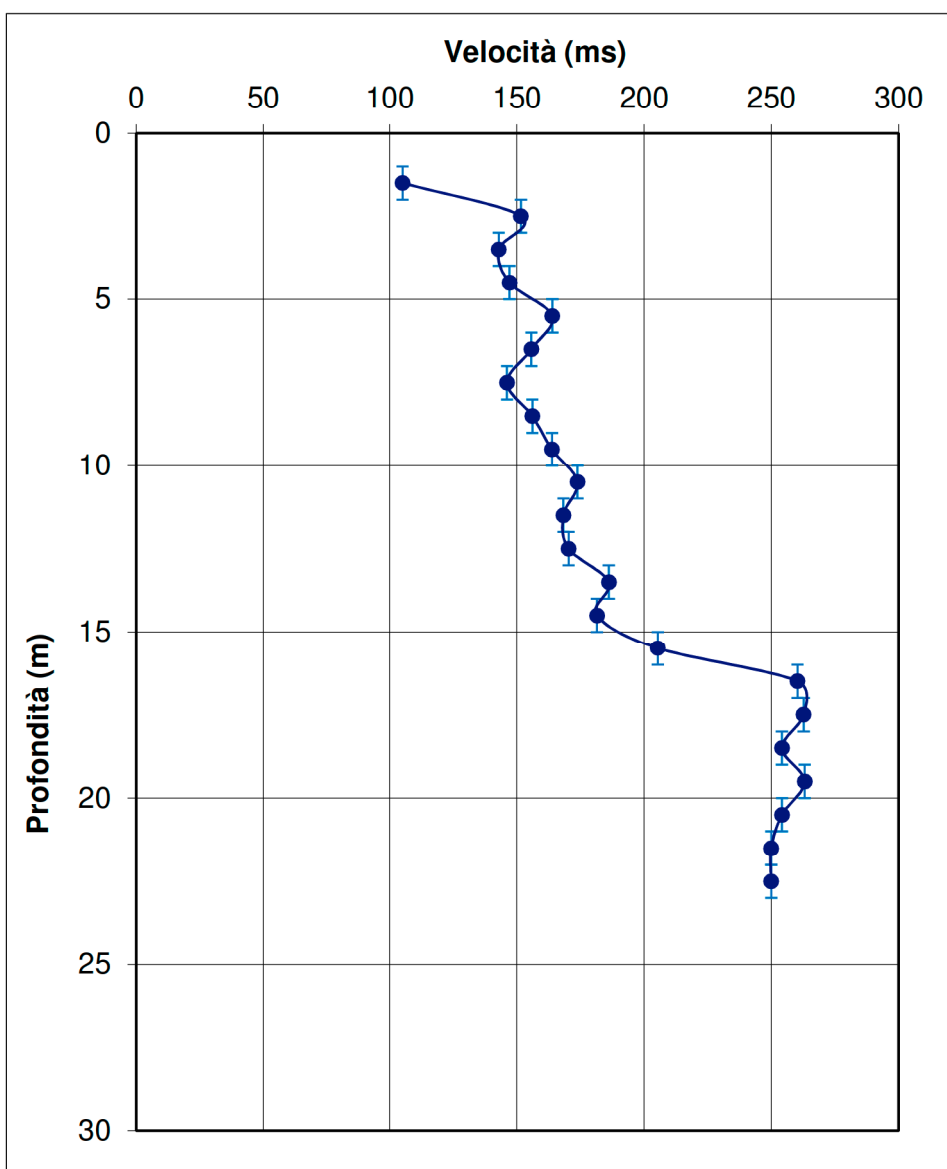GRAFICO ONDE S


Vs (m/sec):	187,90
--------------------	---------------



MALALBERGO_MS, MS 2018 TR1

037035P214HVSR276

Instrument: TRZ-0108/01-10

Start recording: 08/02/18 10:04:48 End recording: 08/02/18 10:24:49

Channel labels: NORTH SOUTH; EAST WEST ; UP DOWN

Trace length: 0h20'00". Analyzed 80% trace (manual window selection)

Sampling rate: 128 Hz


Window size: 20 s

Smoothing type: Triangular window


Smoothing: 10%

HORIZONTAL TO VERTICAL SPECTRAL RATIO


Max. H/V at 0.88 ± 0.01 Hz. (In the range 0.1 - 20.0 Hz).

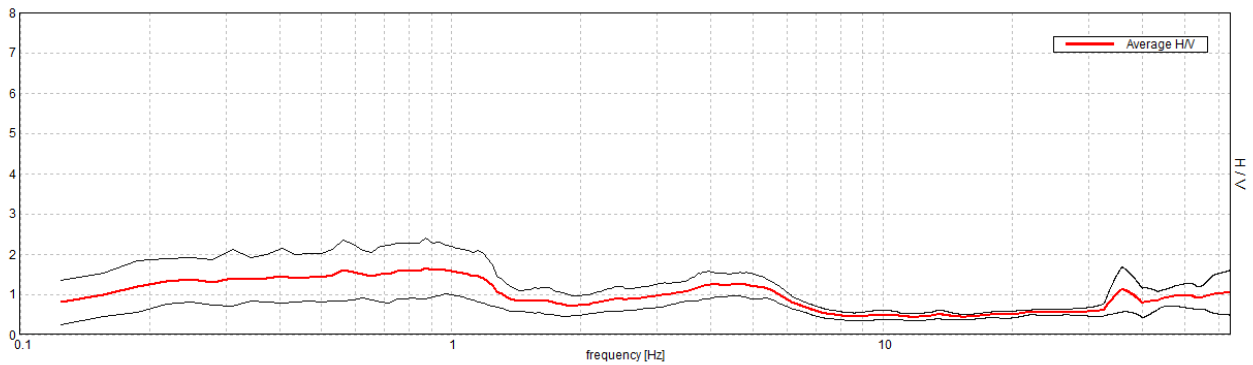


H/V TIME HISTORY

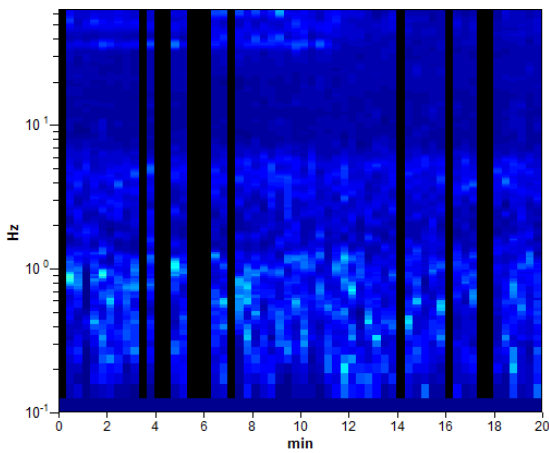

DIRECTIONAL H/V

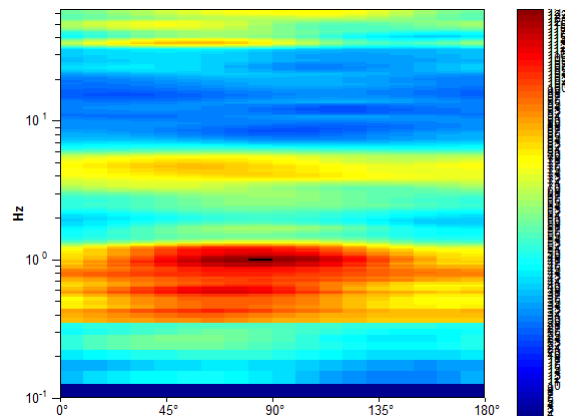

SINGLE COMPONENT SPECTRA

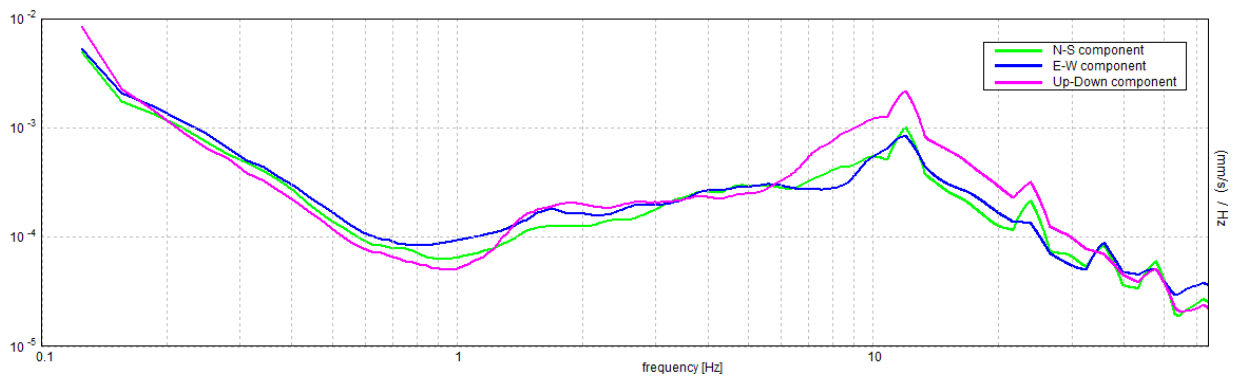

[According to the SESAME, 2005 guidelines. Please read carefully the *Grilla* manual before interpreting the following tables.]

Max. H/V at 0.88 ± 0.01 Hz (in the range 0.1 - 20.0 Hz).

Criteria for a reliable H/V curve

[All 3 should be fulfilled]

$f_0 > 10 / L_w$	$0.88 > 0.50$	OK	
$n_c(f_0) > 200$	$840.0 > 200$	OK	
$\sigma_A(f) < 2$ for $0.5f_0 < f < 2f_0$ if $f_0 > 0.5\text{Hz}$ $\sigma_A(f) < 3$ for $0.5f_0 < f < 2f_0$ if $f_0 < 0.5\text{Hz}$	Exceeded 0 out of 43 times	OK	

Criteria for a clear H/V peak

[At least 5 out of 6 should be fulfilled]

Exists f^- in $[f_0/4, f_0] \mid A_{H/V}(f^-) < A_0 / 2$			NO
Exists f^+ in $[f_0, 4f_0] \mid A_{H/V}(f^+) < A_0 / 2$	1.719 Hz	OK	
$A_0 > 2$	$1.64 > 2$		NO
$f_{\text{peak}}[A_{H/V}(f) \pm \sigma_A(f)] = f_0 \pm 5\%$	$ 0.00288 < 0.05$	OK	
$\sigma_f < \varepsilon(f_0)$	$0.00252 < 0.13125$	OK	
$\sigma_A(f_0) < \theta(f_0)$	$0.3763 < 2.0$	OK	

L_w	window length
n_w	number of windows used in the analysis
$n_c = L_w n_w f_0$	number of significant cycles
f	current frequency
f_0	H/V peak frequency
σ_f	standard deviation of H/V peak frequency
$\varepsilon(f_0)$	threshold value for the stability condition $\sigma_f < \varepsilon(f_0)$
A_0	H/V peak amplitude at frequency f_0
$A_{H/V}(f)$	H/V curve amplitude at frequency f
f^-	frequency between $f_0/4$ and f_0 for which $A_{H/V}(f^-) < A_0/2$
f^+	frequency between f_0 and $4f_0$ for which $A_{H/V}(f^+) < A_0/2$
$\sigma_A(f)$	standard deviation of $A_{H/V}(f)$, $\sigma_A(f)$ is the factor by which the mean $A_{H/V}(f)$ curve should be multiplied or divided
$\sigma_{\log H/V}(f)$	standard deviation of $\log A_{H/V}(f)$ curve
$\theta(f_0)$	threshold value for the stability condition $\sigma_A(f) < \theta(f_0)$

Threshold values for σ_f and $\sigma_A(f_0)$

Freq. range [Hz]	< 0.2	0.2 – 0.5	0.5 – 1.0	1.0 – 2.0	> 2.0
$\varepsilon(f_0)$ [Hz]	$0.25 f_0$	$0.2 f_0$	$0.15 f_0$	$0.10 f_0$	$0.05 f_0$
$\theta(f_0)$ for $\sigma_A(f_0)$	3.0	2.5	2.0	1.78	1.58
$\log \theta(f_0)$ for $\sigma_{\log H/V}(f_0)$	0.48	0.40	0.30	0.25	0.20

MALALBERGO_MS, MS 2018 TR2

037035P215HVSR277

Instrument: TRZ-0108/01-10

Start recording: 08/02/18 11:00:35 End recording: 08/02/18 11:20:36

Channel labels: NORTH SOUTH; EAST WEST ; UP DOWN

Trace length: 0h20'00". Analyzed 65% trace (manual window selection)

Sampling rate: 128 Hz


Window size: 20 s

Smoothing type: Triangular window


Smoothing: 10%

HORIZONTAL TO VERTICAL SPECTRAL RATIO


Max. H/V at 9.38 ± 1.43 Hz. (In the range 0.1 - 20.0 Hz).

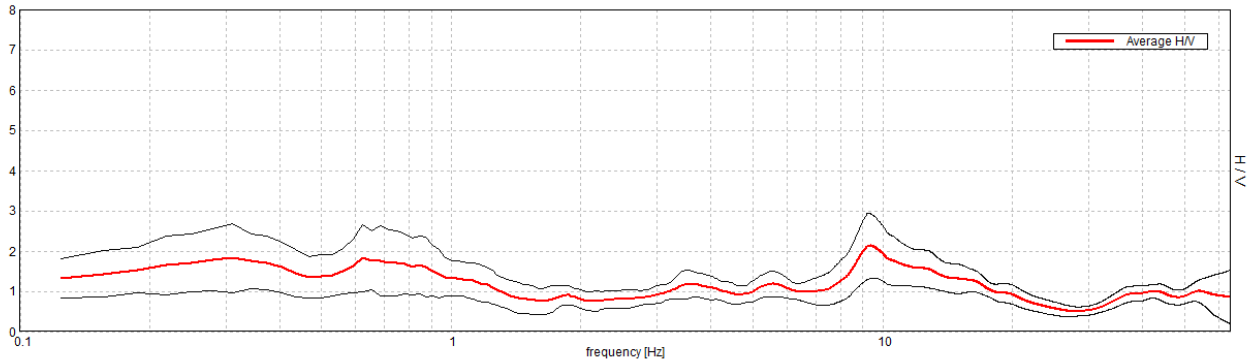


H/V TIME HISTORY

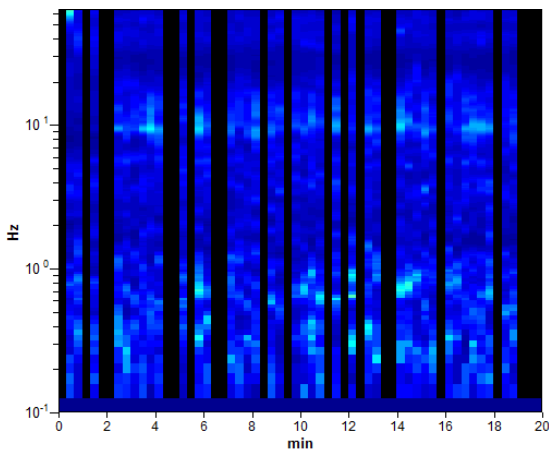

DIRECTIONAL H/V

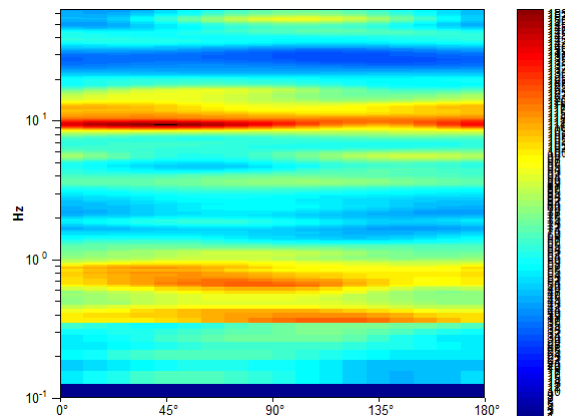

SINGLE COMPONENT SPECTRA

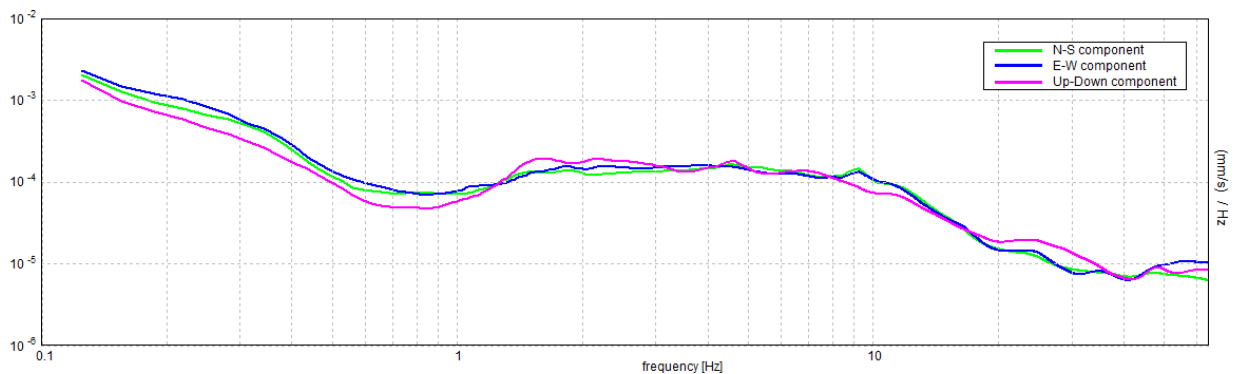

[According to the SESAME, 2005 guidelines. Please read carefully the *Grilla* manual before interpreting the following tables.]

Max. H/V at 9.38 ± 1.43 Hz (in the range 0.1 - 20.0 Hz).

Criteria for a reliable H/V curve

[All 3 should be fulfilled]

$f_0 > 10 / L_w$	$9.38 > 0.50$	OK	
$n_c(f_0) > 200$	$7312.5 > 200$	OK	
$\sigma_A(f) < 2$ for $0.5f_0 < f < 2f_0$ if $f_0 > 0.5\text{Hz}$ $\sigma_A(f) < 3$ for $0.5f_0 < f < 2f_0$ if $f_0 < 0.5\text{Hz}$	Exceeded 0 out of 451 times	OK	

Criteria for a clear H/V peak

[At least 5 out of 6 should be fulfilled]

Exists f^- in $[f_0/4, f_0]$ $A_{H/V}(f^-) < A_0 / 2$	7.469 Hz	OK	
Exists f^+ in $[f_0, 4f_0]$ $A_{H/V}(f^+) < A_0 / 2$	17.531 Hz	OK	
$A_0 > 2$	$2.13 > 2$	OK	
$f_{\text{peak}}[A_{H/V}(f) \pm \sigma_A(f)] = f_0 \pm 5\%$	$ 0.07426 < 0.05$		NO
$\sigma_f < \varepsilon(f_0)$	$0.69614 < 0.46875$		NO
$\sigma_A(f_0) < \theta(f_0)$	$0.3949 < 1.58$	OK	

L_w	window length
n_w	number of windows used in the analysis
$n_c = L_w n_w f_0$	number of significant cycles
f	current frequency
f_0	H/V peak frequency
σ_f	standard deviation of H/V peak frequency
$\varepsilon(f_0)$	threshold value for the stability condition $\sigma_f < \varepsilon(f_0)$
A_0	H/V peak amplitude at frequency f_0
$A_{H/V}(f)$	H/V curve amplitude at frequency f
f^-	frequency between $f_0/4$ and f_0 for which $A_{H/V}(f^-) < A_0/2$
f^+	frequency between f_0 and $4f_0$ for which $A_{H/V}(f^+) < A_0/2$
$\sigma_A(f)$	standard deviation of $A_{H/V}(f)$, $\sigma_A(f)$ is the factor by which the mean $A_{H/V}(f)$ curve should be multiplied or divided
$\sigma_{\log H/V}(f)$	standard deviation of $\log A_{H/V}(f)$ curve
$\theta(f_0)$	threshold value for the stability condition $\sigma_A(f) < \theta(f_0)$

Threshold values for σ_f and $\sigma_A(f_0)$

Freq. range [Hz]	< 0.2	0.2 – 0.5	0.5 – 1.0	1.0 – 2.0	> 2.0
$\varepsilon(f_0)$ [Hz]	$0.25 f_0$	$0.2 f_0$	$0.15 f_0$	$0.10 f_0$	$0.05 f_0$
$\theta(f_0)$ for $\sigma_A(f_0)$	3.0	2.5	2.0	1.78	1.58
$\log \theta(f_0)$ for $\sigma_{\log H/V}(f_0)$	0.48	0.40	0.30	0.25	0.20

MALALBERGO_MS, MS 2018 TR10

037035P216HVSR278

Instrument: TRZ-0108/01-10

Start recording: 09/03/18 17:22:10 End recording: 09/03/18 17:42:11

Channel labels: NORTH SOUTH; EAST WEST ; UP DOWN

Trace length: 0h20'00". Analyzed 85% trace (manual window selection)

Sampling rate: 128 Hz


Window size: 20 s

Smoothing type: Triangular window


Smoothing: 10%

HORIZONTAL TO VERTICAL SPECTRAL RATIO


Max. H/V at 0.81 ± 0.09 Hz. (In the range 0.1 - 20.0 Hz).

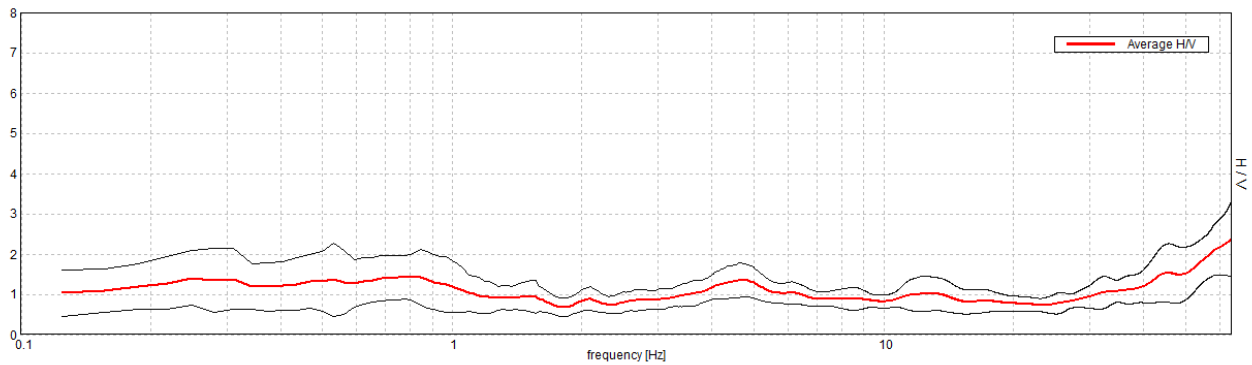


H/V TIME HISTORY

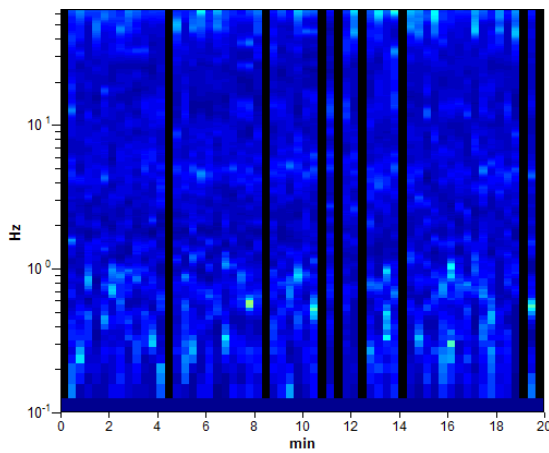

DIRECTIONAL H/V

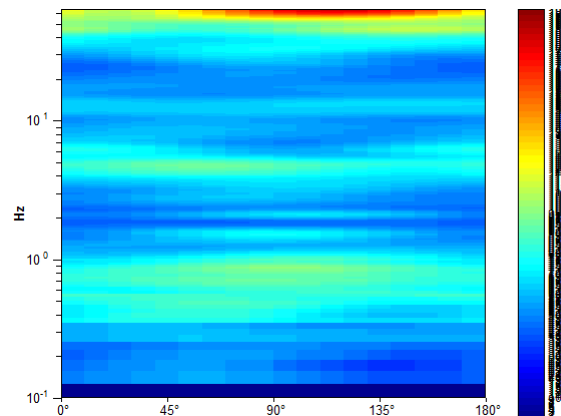

SINGLE COMPONENT SPECTRA

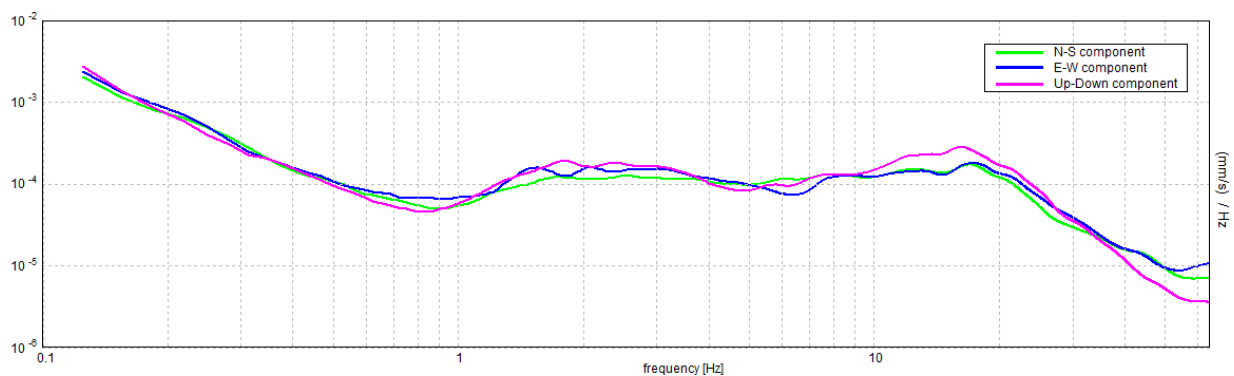

[According to the SESAME, 2005 guidelines. Please read carefully the *Grilla* manual before interpreting the following tables.]

Max. H/V at 0.81 ± 0.09 Hz (in the range 0.1 - 20.0 Hz).

Criteria for a reliable H/V curve

[All 3 should be fulfilled]

$f_0 > 10 / L_w$	$0.81 > 0.50$	OK	
$n_c(f_0) > 200$	$828.8 > 200$	OK	
$\sigma_A(f) < 2$ for $0.5f_0 < f < 2f_0$ if $f_0 > 0.5\text{Hz}$ $\sigma_A(f) < 3$ for $0.5f_0 < f < 2f_0$ if $f_0 < 0.5\text{Hz}$	Exceeded 0 out of 40 times	OK	

Criteria for a clear H/V peak

[At least 5 out of 6 should be fulfilled]

Exists f^- in $[f_0/4, f_0]$ $A_{H/V}(f^-) < A_0 / 2$			NO
Exists f^+ in $[f_0, 4f_0]$ $A_{H/V}(f^+) < A_0 / 2$	1.75 Hz	OK	
$A_0 > 2$	$1.43 > 2$		NO
$f_{\text{peak}}[A_{H/V}(f) \pm \sigma_A(f)] = f_0 \pm 5\%$	$ 0.05413 < 0.05$		NO
$\sigma_f < \varepsilon(f_0)$	$0.04398 < 0.12188$	OK	
$\sigma_A(f_0) < \theta(f_0)$	$0.289 < 2.0$	OK	

L_w	window length
n_w	number of windows used in the analysis
$n_c = L_w n_w f_0$	number of significant cycles
f	current frequency
f_0	H/V peak frequency
σ_f	standard deviation of H/V peak frequency
$\varepsilon(f_0)$	threshold value for the stability condition $\sigma_f < \varepsilon(f_0)$
A_0	H/V peak amplitude at frequency f_0
$A_{H/V}(f)$	H/V curve amplitude at frequency f
f^-	frequency between $f_0/4$ and f_0 for which $A_{H/V}(f^-) < A_0/2$
f^+	frequency between f_0 and $4f_0$ for which $A_{H/V}(f^+) < A_0/2$
$\sigma_A(f)$	standard deviation of $A_{H/V}(f)$, $\sigma_A(f)$ is the factor by which the mean $A_{H/V}(f)$ curve should be multiplied or divided
$\sigma_{\log H/V}(f)$	standard deviation of $\log A_{H/V}(f)$ curve
$\theta(f_0)$	threshold value for the stability condition $\sigma_A(f) < \theta(f_0)$

Threshold values for σ_f and $\sigma_A(f_0)$

Freq. range [Hz]	< 0.2	0.2 – 0.5	0.5 – 1.0	1.0 – 2.0	> 2.0
$\varepsilon(f_0)$ [Hz]	$0.25 f_0$	$0.2 f_0$	$0.15 f_0$	$0.10 f_0$	$0.05 f_0$
$\theta(f_0)$ for $\sigma_A(f_0)$	3.0	2.5	2.0	1.78	1.58
$\log \theta(f_0)$ for $\sigma_{\log H/V}(f_0)$	0.48	0.40	0.30	0.25	0.20

MALALBERGO_MS, MS 2018 TR16

037035P217HVSR279

Instrument: TRZ-0108/01-10

Start recording: 03/04/18 10:35:55 End recording: 03/04/18 10:55:56

Channel labels: NORTH SOUTH; EAST WEST ; UP DOWN

Trace length: 0h20'00". Analyzed 75% trace (manual window selection)

Sampling rate: 128 Hz


Window size: 20 s

Smoothing type: Triangular window


Smoothing: 10%

HORIZONTAL TO VERTICAL SPECTRAL RATIO


Max. H/V at 0.94 ± 0.11 Hz. (In the range 0.1 - 20.0 Hz).

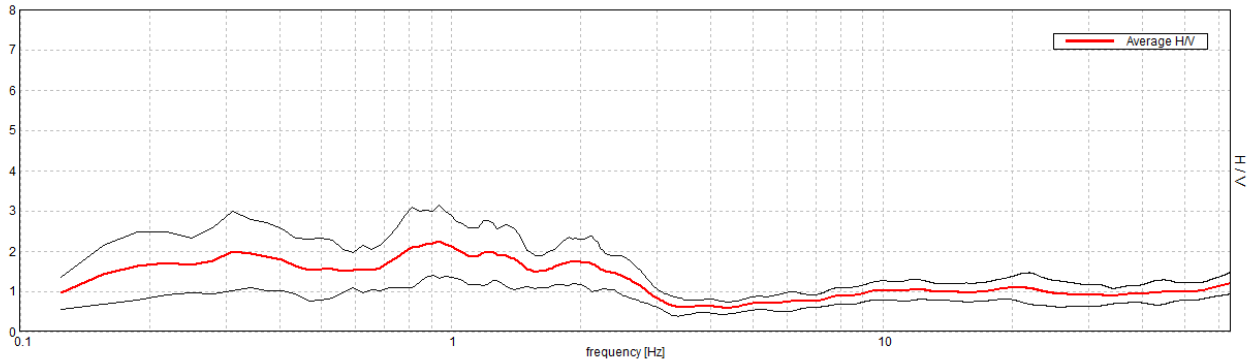


H/V TIME HISTORY

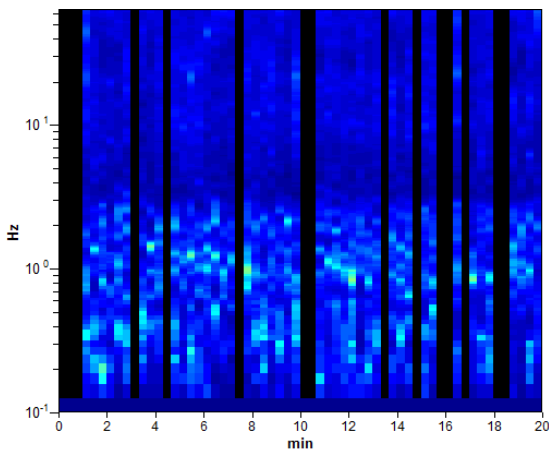

DIRECTIONAL H/V

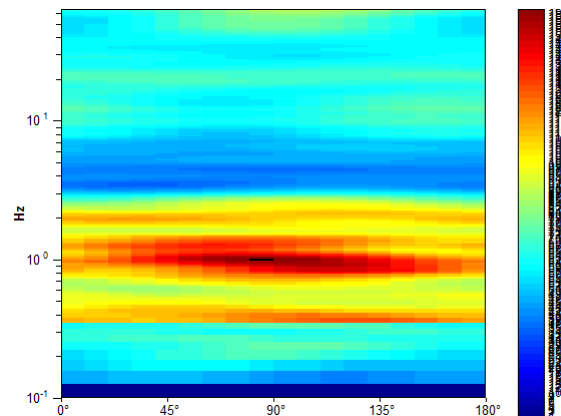

SINGLE COMPONENT SPECTRA

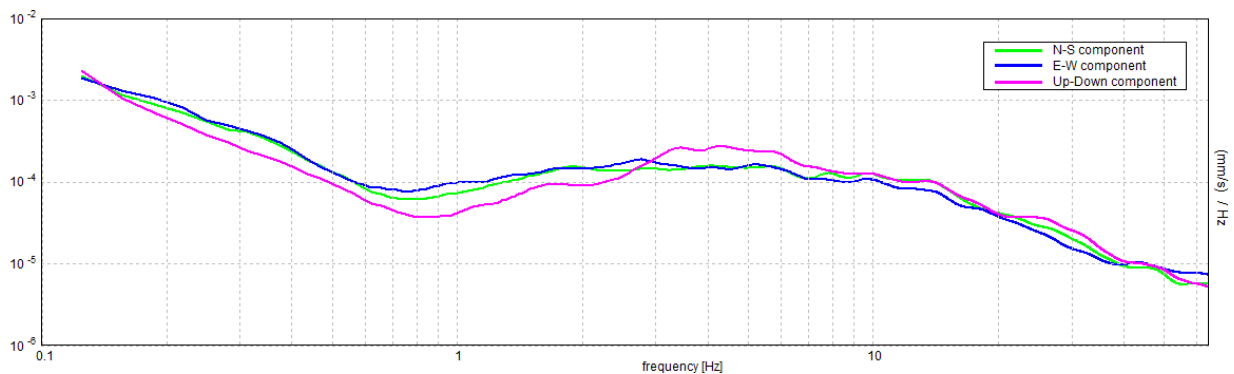

[According to the SESAME, 2005 guidelines. Please read carefully the *Grilla* manual before interpreting the following tables.]

Max. H/V at 0.94 ± 0.11 Hz (in the range 0.1 - 20.0 Hz).

Criteria for a reliable H/V curve

[All 3 should be fulfilled]

$f_0 > 10 / L_w$	$0.94 > 0.50$	OK	
$n_c(f_0) > 200$	$843.8 > 200$	OK	
$\sigma_A(f) < 2$ for $0.5f_0 < f < 2f_0$ if $f_0 > 0.5\text{Hz}$ $\sigma_A(f) < 3$ for $0.5f_0 < f < 2f_0$ if $f_0 < 0.5\text{Hz}$	Exceeded 0 out of 46 times	OK	

Criteria for a clear H/V peak

[At least 5 out of 6 should be fulfilled]

Exists f^- in $[f_0/4, f_0]$ $A_{H/V}(f^-) < A_0 / 2$			NO
Exists f^+ in $[f_0, 4f_0]$ $A_{H/V}(f^+) < A_0 / 2$	2.781 Hz	OK	
$A_0 > 2$	$2.24 > 2$	OK	
$f_{\text{peak}}[A_{H/V}(f) \pm \sigma_A(f)] = f_0 \pm 5\%$	$ 0.05773 < 0.05$		NO
$\sigma_f < \varepsilon(f_0)$	$0.05412 < 0.14063$	OK	
$\sigma_A(f_0) < \theta(f_0)$	$0.447 < 2.0$	OK	

L_w	window length
n_w	number of windows used in the analysis
$n_c = L_w n_w f_0$	number of significant cycles
f	current frequency
f_0	H/V peak frequency
σ_f	standard deviation of H/V peak frequency
$\varepsilon(f_0)$	threshold value for the stability condition $\sigma_f < \varepsilon(f_0)$
A_0	H/V peak amplitude at frequency f_0
$A_{H/V}(f)$	H/V curve amplitude at frequency f
f^-	frequency between $f_0/4$ and f_0 for which $A_{H/V}(f^-) < A_0/2$
f^+	frequency between f_0 and $4f_0$ for which $A_{H/V}(f^+) < A_0/2$
$\sigma_A(f)$	standard deviation of $A_{H/V}(f)$, $\sigma_A(f)$ is the factor by which the mean $A_{H/V}(f)$ curve should be multiplied or divided
$\sigma_{\log H/V}(f)$	standard deviation of $\log A_{H/V}(f)$ curve
$\theta(f_0)$	threshold value for the stability condition $\sigma_A(f) < \theta(f_0)$

Threshold values for σ_f and $\sigma_A(f_0)$

Freq. range [Hz]	< 0.2	0.2 – 0.5	0.5 – 1.0	1.0 – 2.0	> 2.0
$\varepsilon(f_0)$ [Hz]	$0.25 f_0$	$0.2 f_0$	$0.15 f_0$	$0.10 f_0$	$0.05 f_0$
$\theta(f_0)$ for $\sigma_A(f_0)$	3.0	2.5	2.0	1.78	1.58
$\log \theta(f_0)$ for $\sigma_{\log H/V}(f_0)$	0.48	0.40	0.30	0.25	0.20

MALALBERGO_MS, MS 2018 TR17

037035P218HVSR280

Instrument: TRZ-0108/01-10

Start recording: 03/04/18 11:02:54 End recording: 03/04/18 11:22:55

Channel labels: NORTH SOUTH; EAST WEST ; UP DOWN

Trace length: 0h20'00". Analyzed 87% trace (manual window selection)

Sampling rate: 128 Hz


Window size: 20 s

Smoothing type: Triangular window


Smoothing: 10%

HORIZONTAL TO VERTICAL SPECTRAL RATIO


Max. H/V at 0.94 ± 0.07 Hz. (In the range 0.1 - 20.0 Hz).

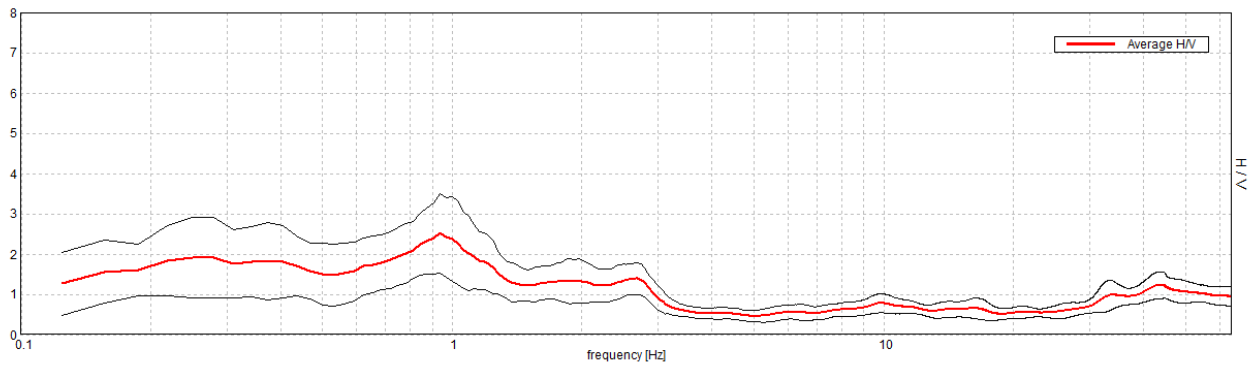


H/V TIME HISTORY

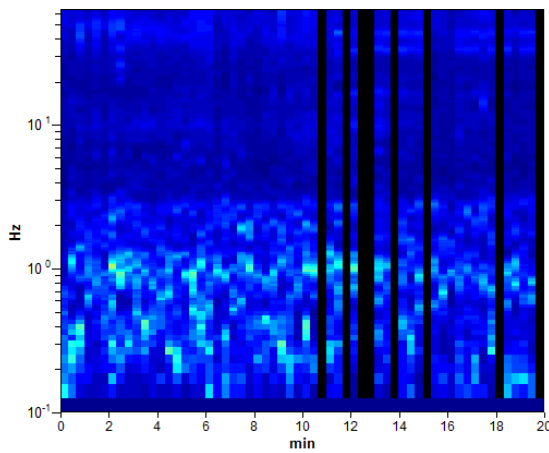

DIRECTIONAL H/V

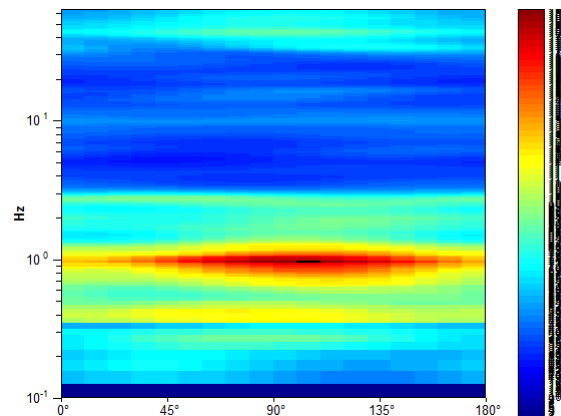

SINGLE COMPONENT SPECTRA

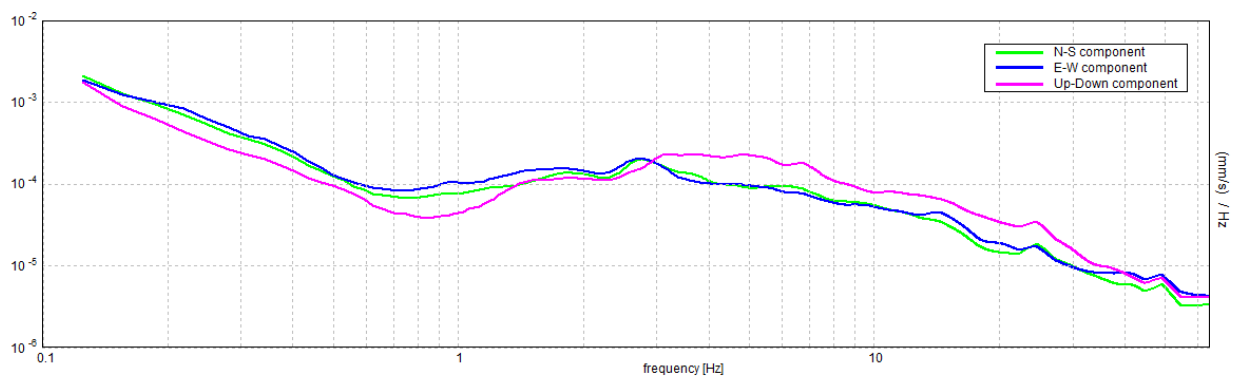

[According to the SESAME, 2005 guidelines. Please read carefully the *Grilla* manual before interpreting the following tables.]

Max. H/V at 0.94 ± 0.07 Hz (in the range 0.1 - 20.0 Hz).

Criteria for a reliable H/V curve

[All 3 should be fulfilled]

$f_0 > 10 / L_w$	$0.94 > 0.50$	OK	
$n_c(f_0) > 200$	$975.0 > 200$	OK	
$\sigma_A(f) < 2$ for $0.5f_0 < f < 2f_0$ if $f_0 > 0.5\text{Hz}$ $\sigma_A(f) < 3$ for $0.5f_0 < f < 2f_0$ if $f_0 < 0.5\text{Hz}$	Exceeded 0 out of 46 times	OK	

Criteria for a clear H/V peak

[At least 5 out of 6 should be fulfilled]

Exists f^- in $[f_0/4, f_0] \mid A_{H/V}(f^-) < A_0 / 2$			NO
Exists f^+ in $[f_0, 4f_0] \mid A_{H/V}(f^+) < A_0 / 2$	1.438 Hz	OK	
$A_0 > 2$	$2.52 > 2$	OK	
$f_{\text{peak}}[A_{H/V}(f) \pm \sigma_A(f)] = f_0 \pm 5\%$	$ 0.0392 < 0.05$	OK	
$\sigma_f < \varepsilon(f_0)$	$0.03675 < 0.14063$	OK	
$\sigma_A(f_0) < \theta(f_0)$	$0.487 < 2.0$	OK	

L_w	window length
n_w	number of windows used in the analysis
$n_c = L_w n_w f_0$	number of significant cycles
f	current frequency
f_0	H/V peak frequency
σ_f	standard deviation of H/V peak frequency
$\varepsilon(f_0)$	threshold value for the stability condition $\sigma_f < \varepsilon(f_0)$
A_0	H/V peak amplitude at frequency f_0
$A_{H/V}(f)$	H/V curve amplitude at frequency f
f^-	frequency between $f_0/4$ and f_0 for which $A_{H/V}(f^-) < A_0/2$
f^+	frequency between f_0 and $4f_0$ for which $A_{H/V}(f^+) < A_0/2$
$\sigma_A(f)$	standard deviation of $A_{H/V}(f)$, $\sigma_A(f)$ is the factor by which the mean $A_{H/V}(f)$ curve should be multiplied or divided
$\sigma_{\log H/V}(f)$	standard deviation of $\log A_{H/V}(f)$ curve
$\theta(f_0)$	threshold value for the stability condition $\sigma_A(f) < \theta(f_0)$

Threshold values for σ_f and $\sigma_A(f_0)$

Freq. range [Hz]	< 0.2	0.2 – 0.5	0.5 – 1.0	1.0 – 2.0	> 2.0
$\varepsilon(f_0)$ [Hz]	$0.25 f_0$	$0.2 f_0$	$0.15 f_0$	$0.10 f_0$	$0.05 f_0$
$\theta(f_0)$ for $\sigma_A(f_0)$	3.0	2.5	2.0	1.78	1.58
$\log \theta(f_0)$ for $\sigma_{\log H/V}(f_0)$	0.48	0.40	0.30	0.25	0.20

MALALBERGO_MS, MS 2018 TR18

037035P219HVSR281

Instrument: TRZ-0108/01-10

Start recording: 07/04/18 10:30:20 End recording: 07/04/18 10:50:21

Channel labels: NORTH SOUTH; EAST WEST ; UP DOWN

Trace length: 0h20'00". Analyzed 80% trace (manual window selection)

Sampling rate: 128 Hz


Window size: 20 s

Smoothing type: Triangular window


Smoothing: 10%

HORIZONTAL TO VERTICAL SPECTRAL RATIO


Max. H/V at 16.84 ± 2.93 Hz. (In the range 0.1 - 20.0 Hz).

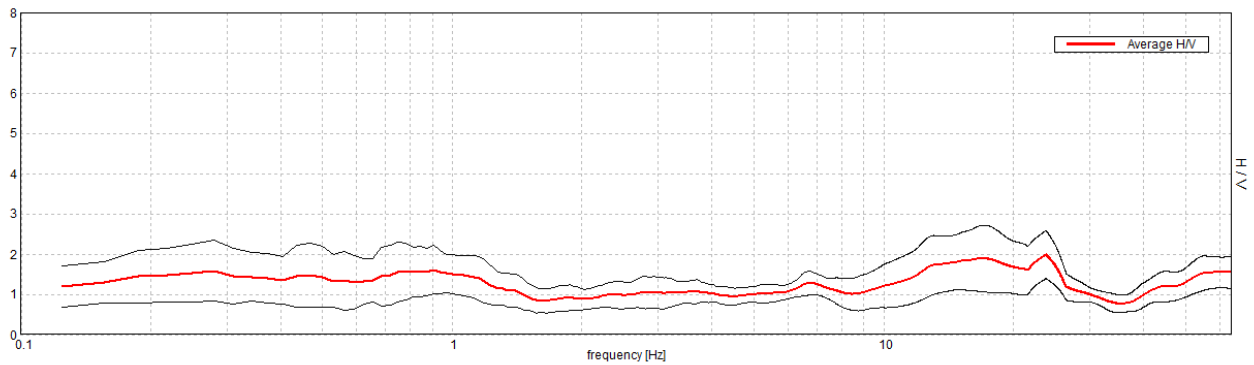


H/V TIME HISTORY

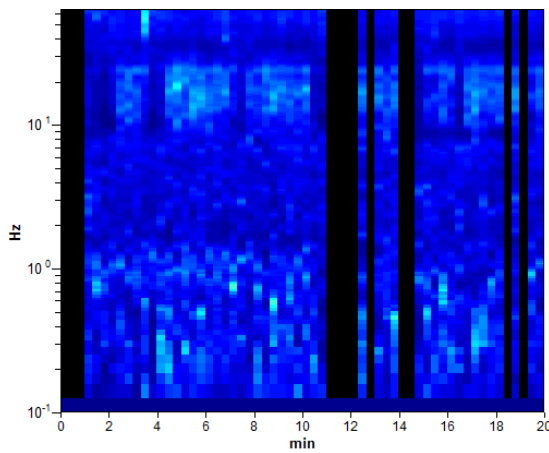

DIRECTIONAL H/V

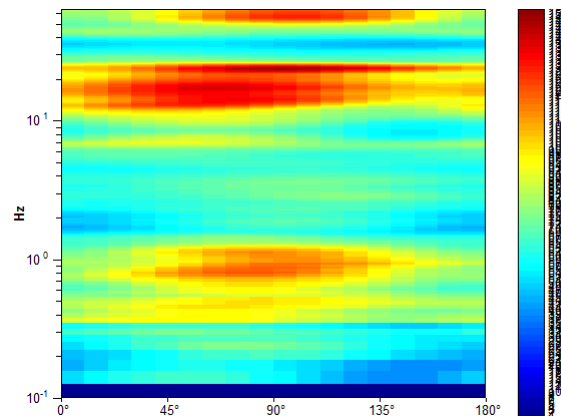

SINGLE COMPONENT SPECTRA

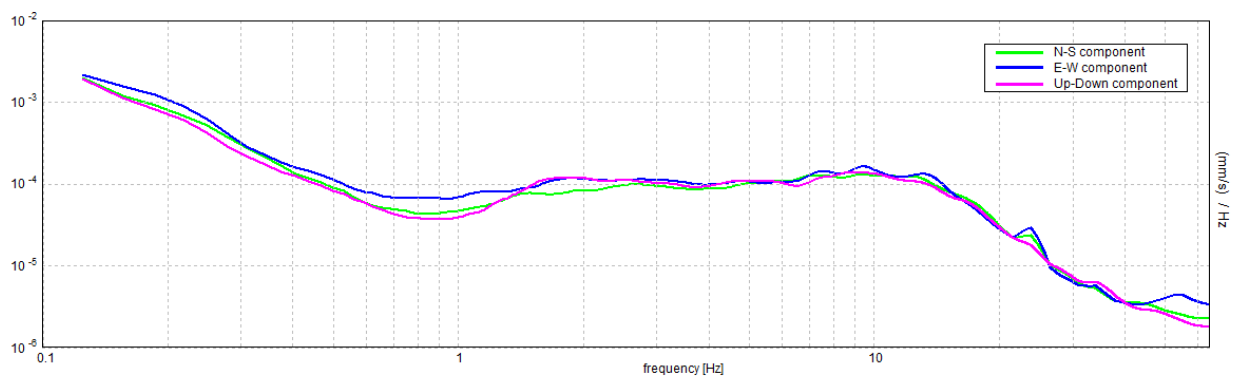

[According to the SESAME, 2005 guidelines. Please read carefully the *Grilla* manual before interpreting the following tables.]

Max. H/V at 16.84 ± 2.93 Hz (in the range 0.1 - 20.0 Hz).

Criteria for a reliable H/V curve

[All 3 should be fulfilled]

$f_0 > 10 / L_w$	16.84 > 0.50	OK	
$n_c(f_0) > 200$	16170.0 > 200	OK	
$\sigma_A(f) < 2$ for $0.5f_0 < f < 2f_0$ if $f_0 > 0.5\text{Hz}$ $\sigma_A(f) < 3$ for $0.5f_0 < f < 2f_0$ if $f_0 < 0.5\text{Hz}$	Exceeded 0 out of 810 times	OK	

Criteria for a clear H/V peak

[At least 5 out of 6 should be fulfilled]

Exists f^- in $[f_0/4, f_0]$ $A_{H/V}(f^-) < A_0 / 2$	4.531 Hz	OK	
Exists f^+ in $[f_0, 4f_0]$ $A_{H/V}(f^+) < A_0 / 2$	30.875 Hz	OK	
$A_0 > 2$	1.89 > 2		NO
$f_{\text{peak}}[A_{H/V}(f) \pm \sigma_A(f)] = f_0 \pm 5\%$	$ 0.08546 < 0.05$		NO
$\sigma_f < \varepsilon(f_0)$	1.43955 < 0.84219		NO
$\sigma_A(f_0) < \theta(f_0)$	0.4031 < 1.58	OK	

L_w	window length
n_w	number of windows used in the analysis
$n_c = L_w n_w f_0$	number of significant cycles
f	current frequency
f_0	H/V peak frequency
σ_f	standard deviation of H/V peak frequency
$\varepsilon(f_0)$	threshold value for the stability condition $\sigma_f < \varepsilon(f_0)$
A_0	H/V peak amplitude at frequency f_0
$A_{H/V}(f)$	H/V curve amplitude at frequency f
f^-	frequency between $f_0/4$ and f_0 for which $A_{H/V}(f^-) < A_0/2$
f^+	frequency between f_0 and $4f_0$ for which $A_{H/V}(f^+) < A_0/2$
$\sigma_A(f)$	standard deviation of $A_{H/V}(f)$, $\sigma_A(f)$ is the factor by which the mean $A_{H/V}(f)$ curve should be multiplied or divided
$\sigma_{\log H/V}(f)$	standard deviation of $\log A_{H/V}(f)$ curve
$\theta(f_0)$	threshold value for the stability condition $\sigma_A(f) < \theta(f_0)$

Threshold values for σ_f and $\sigma_A(f_0)$

Freq. range [Hz]	< 0.2	0.2 – 0.5	0.5 – 1.0	1.0 – 2.0	> 2.0
$\varepsilon(f_0)$ [Hz]	0.25 f_0	0.2 f_0	0.15 f_0	0.10 f_0	0.05 f_0
$\theta(f_0)$ for $\sigma_A(f_0)$	3.0	2.5	2.0	1.78	1.58
$\log \theta(f_0)$ for $\sigma_{\log H/V}(f_0)$	0.48	0.40	0.30	0.25	0.20

MALALBERGO_MS, MS 2018 TR19

037035P220HVSR282

Instrument: TRZ-0108/01-10

Start recording: 07/04/18 09:24:13 End recording: 07/04/18 09:44:14

Channel labels: NORTH SOUTH; EAST WEST ; UP DOWN

Trace length: 0h20'00". Analyzed 78% trace (manual window selection)

Sampling rate: 128 Hz


Window size: 20 s

Smoothing type: Triangular window


Smoothing: 10%

HORIZONTAL TO VERTICAL SPECTRAL RATIO


Max. H/V at 0.75 ± 0.02 Hz. (In the range 0.1 - 20.0 Hz).

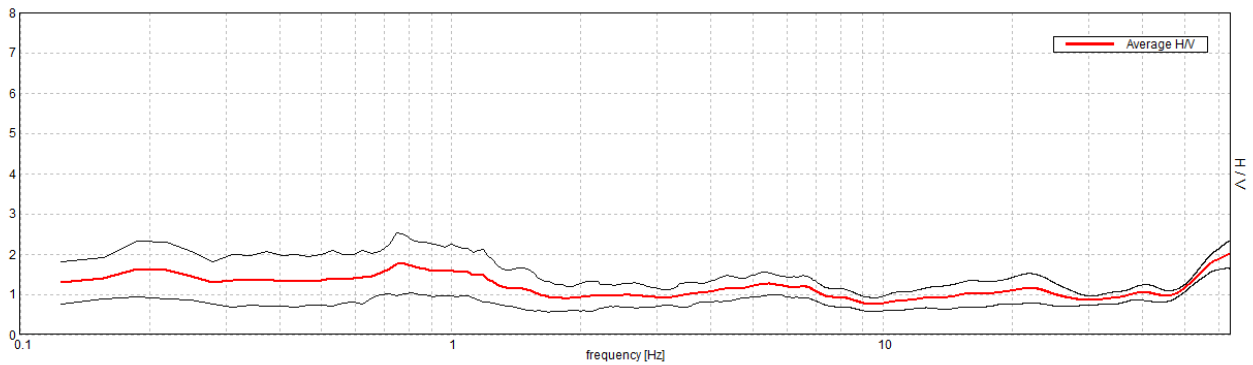


H/V TIME HISTORY

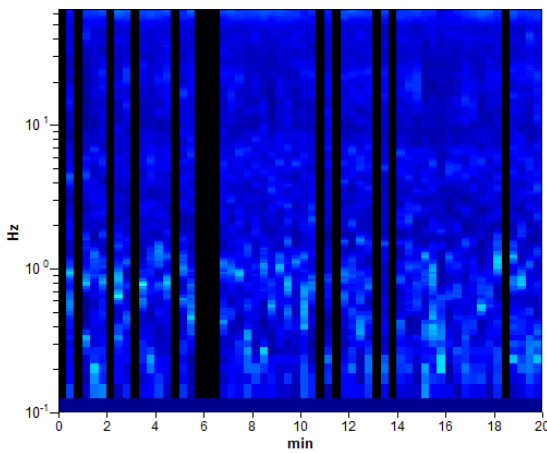

DIRECTIONAL H/V

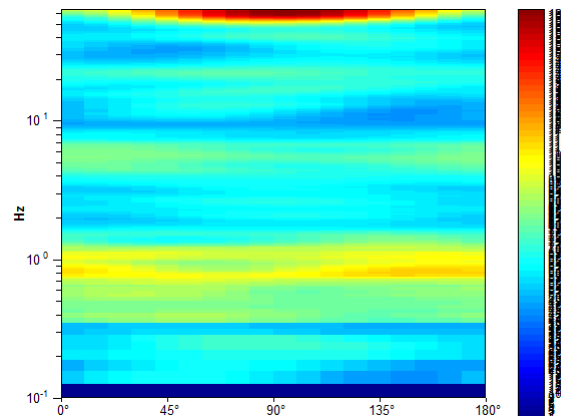

SINGLE COMPONENT SPECTRA

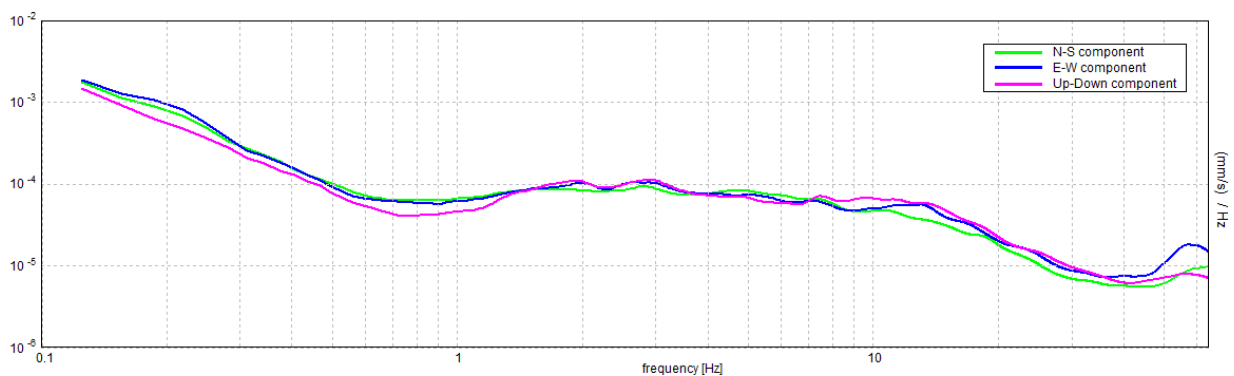

[According to the SESAME, 2005 guidelines. Please read carefully the *Grilla* manual before interpreting the following tables.]

Max. H/V at 0.75 ± 0.02 Hz (in the range 0.1 - 20.0 Hz).

Criteria for a reliable H/V curve

[All 3 should be fulfilled]

$f_0 > 10 / L_w$	$0.75 > 0.50$	OK	
$n_c(f_0) > 200$	$705.0 > 200$	OK	
$\sigma_A(f) < 2$ for $0.5f_0 < f < 2f_0$ if $f_0 > 0.5\text{Hz}$ $\sigma_A(f) < 3$ for $0.5f_0 < f < 2f_0$ if $f_0 < 0.5\text{Hz}$	Exceeded 0 out of 37 times	OK	

Criteria for a clear H/V peak

[At least 5 out of 6 should be fulfilled]

Exists f^- in $[f_0/4, f_0]$ $A_{H/V}(f^-) < A_0 / 2$			NO
Exists f^+ in $[f_0, 4f_0]$ $A_{H/V}(f^+) < A_0 / 2$			NO
$A_0 > 2$	$1.75 > 2$		NO
$f_{\text{peak}}[A_{H/V}(f) \pm \sigma_A(f)] = f_0 \pm 5\%$	$ 0.01038 < 0.05$	OK	
$\sigma_f < \varepsilon(f_0)$	$0.00778 < 0.1125$	OK	
$\sigma_A(f_0) < \theta(f_0)$	$0.3844 < 2.0$	OK	

L_w	window length
n_w	number of windows used in the analysis
$n_c = L_w n_w f_0$	number of significant cycles
f	current frequency
f_0	H/V peak frequency
σ_f	standard deviation of H/V peak frequency
$\varepsilon(f_0)$	threshold value for the stability condition $\sigma_f < \varepsilon(f_0)$
A_0	H/V peak amplitude at frequency f_0
$A_{H/V}(f)$	H/V curve amplitude at frequency f
f^-	frequency between $f_0/4$ and f_0 for which $A_{H/V}(f^-) < A_0/2$
f^+	frequency between f_0 and $4f_0$ for which $A_{H/V}(f^+) < A_0/2$
$\sigma_A(f)$	standard deviation of $A_{H/V}(f)$, $\sigma_A(f)$ is the factor by which the mean $A_{H/V}(f)$ curve should be multiplied or divided
$\sigma_{\log H/V}(f)$	standard deviation of $\log A_{H/V}(f)$ curve
$\theta(f_0)$	threshold value for the stability condition $\sigma_A(f) < \theta(f_0)$

Threshold values for σ_f and $\sigma_A(f_0)$

Freq. range [Hz]	< 0.2	0.2 – 0.5	0.5 – 1.0	1.0 – 2.0	> 2.0
$\varepsilon(f_0)$ [Hz]	$0.25 f_0$	$0.2 f_0$	$0.15 f_0$	$0.10 f_0$	$0.05 f_0$
$\theta(f_0)$ for $\sigma_A(f_0)$	3.0	2.5	2.0	1.78	1.58
$\log \theta(f_0)$ for $\sigma_{\log H/V}(f_0)$	0.48	0.40	0.30	0.25	0.20

MALALBERGO_MS, MS 2018 TR20

037035P221HVSR283

Instrument: TRZ-0108/01-10

Start recording: 07/04/18 10:04:26 End recording: 07/04/18 10:24:27

Channel labels: NORTH SOUTH; EAST WEST ; UP DOWN

Trace length: 0h20'00". Analyzed 78% trace (manual window selection)

Sampling rate: 128 Hz


Window size: 20 s

Smoothing type: Triangular window


Smoothing: 10%

HORIZONTAL TO VERTICAL SPECTRAL RATIO


Max. H/V at 0.91 ± 0.05 Hz. (In the range 0.1 - 20.0 Hz).

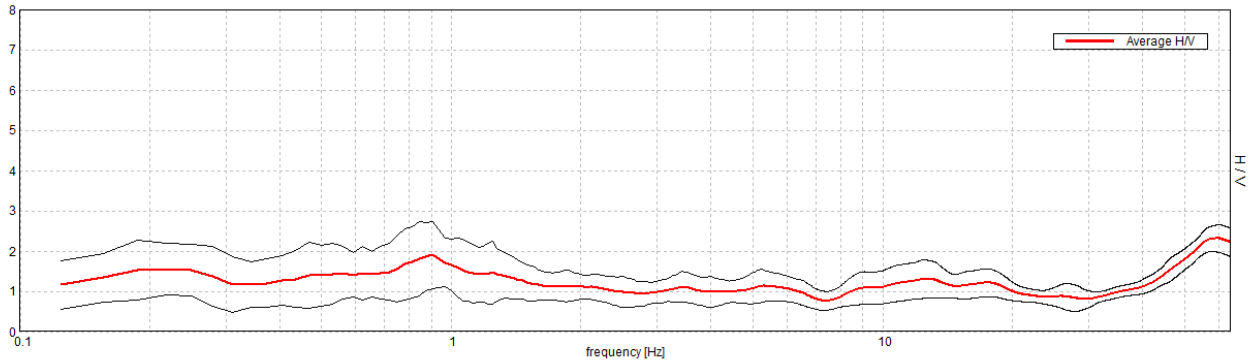


H/V TIME HISTORY

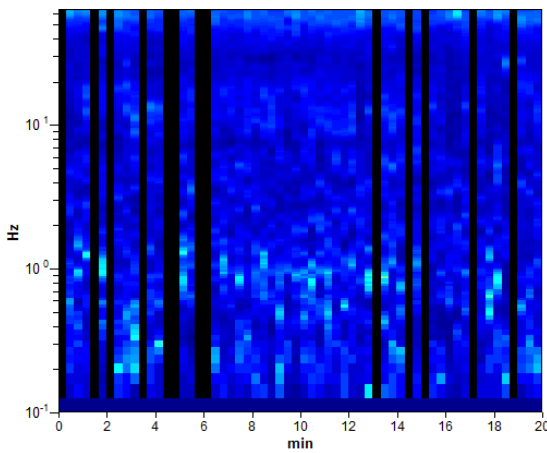

DIRECTIONAL H/V

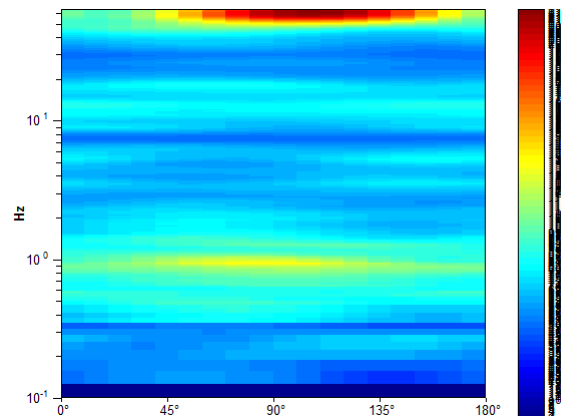

SINGLE COMPONENT SPECTRA

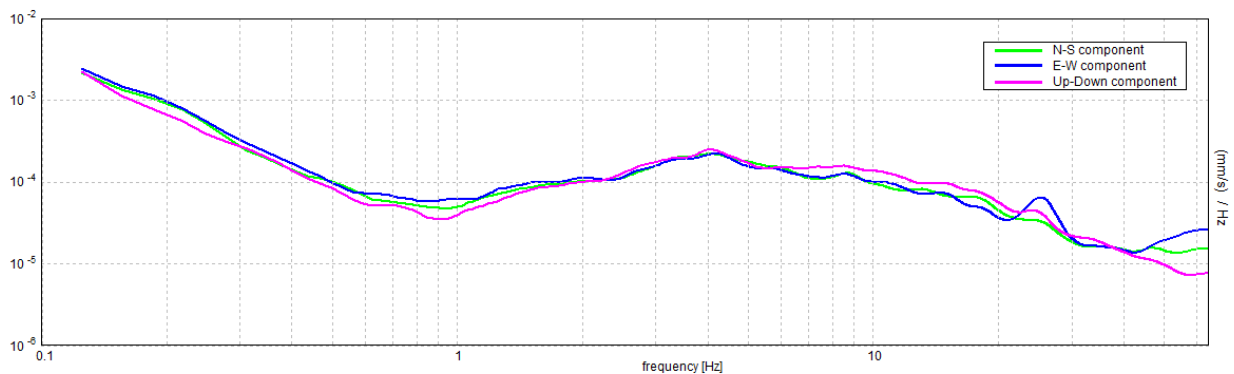

[According to the SESAME, 2005 guidelines. Please read carefully the *Grilla* manual before interpreting the following tables.]

Max. H/V at 0.91 ± 0.05 Hz (in the range 0.1 - 20.0 Hz).

Criteria for a reliable H/V curve

[All 3 should be fulfilled]

$f_0 > 10 / L_w$	$0.91 > 0.50$	OK	
$n_c(f_0) > 200$	$851.9 > 200$	OK	
$\sigma_A(f) < 2$ for $0.5f_0 < f < 2f_0$ if $f_0 > 0.5\text{Hz}$ $\sigma_A(f) < 3$ for $0.5f_0 < f < 2f_0$ if $f_0 < 0.5\text{Hz}$	Exceeded 0 out of 44 times	OK	

Criteria for a clear H/V peak

[At least 5 out of 6 should be fulfilled]

Exists f^- in $[f_0/4, f_0]$ $A_{H/V}(f^-) < A_0 / 2$			NO
Exists f^+ in $[f_0, 4f_0]$ $A_{H/V}(f^+) < A_0 / 2$	2.656 Hz	OK	
$A_0 > 2$	$1.90 > 2$		NO
$f_{\text{peak}}[A_{H/V}(f) \pm \sigma_A(f)] = f_0 \pm 5\%$	$ 0.02655 < 0.05$	OK	
$\sigma_f < \varepsilon(f_0)$	$0.02407 < 0.13594$	OK	
$\sigma_A(f_0) < \theta(f_0)$	$0.4077 < 2.0$	OK	

L_w	window length
n_w	number of windows used in the analysis
$n_c = L_w n_w f_0$	number of significant cycles
f	current frequency
f_0	H/V peak frequency
σ_f	standard deviation of H/V peak frequency
$\varepsilon(f_0)$	threshold value for the stability condition $\sigma_f < \varepsilon(f_0)$
A_0	H/V peak amplitude at frequency f_0
$A_{H/V}(f)$	H/V curve amplitude at frequency f
f^-	frequency between $f_0/4$ and f_0 for which $A_{H/V}(f^-) < A_0/2$
f^+	frequency between f_0 and $4f_0$ for which $A_{H/V}(f^+) < A_0/2$
$\sigma_A(f)$	standard deviation of $A_{H/V}(f)$, $\sigma_A(f)$ is the factor by which the mean $A_{H/V}(f)$ curve should be multiplied or divided
$\sigma_{\log H/V}(f)$	standard deviation of $\log A_{H/V}(f)$ curve
$\theta(f_0)$	threshold value for the stability condition $\sigma_A(f) < \theta(f_0)$

Threshold values for σ_f and $\sigma_A(f_0)$


Freq. range [Hz]	< 0.2	0.2 – 0.5	0.5 – 1.0	1.0 – 2.0	> 2.0
$\varepsilon(f_0)$ [Hz]	$0.25 f_0$	$0.2 f_0$	$0.15 f_0$	$0.10 f_0$	$0.05 f_0$
$\theta(f_0)$ for $\sigma_A(f_0)$	3.0	2.5	2.0	1.78	1.58
$\log \theta(f_0)$ for $\sigma_{\log H/V}(f_0)$	0.48	0.40	0.30	0.25	0.20

PROSPEZIONE SISMICA CON METODOLOGIA ATTIVA/PASSIVA MASW/Re.Mi.


Località Casoni, Comune di Malalbergo (BO) – 037035L8MASW8

n° tracce	Δx (m)	L tot (m)	Δt (ms)	T (s)
25	2,0	46,0	0,5/2,0	2,0/32,0


Δx : interdistanza geofonica; L tot: lunghezza profilo; Δt : passo di campionamento; T: durata registrazione.

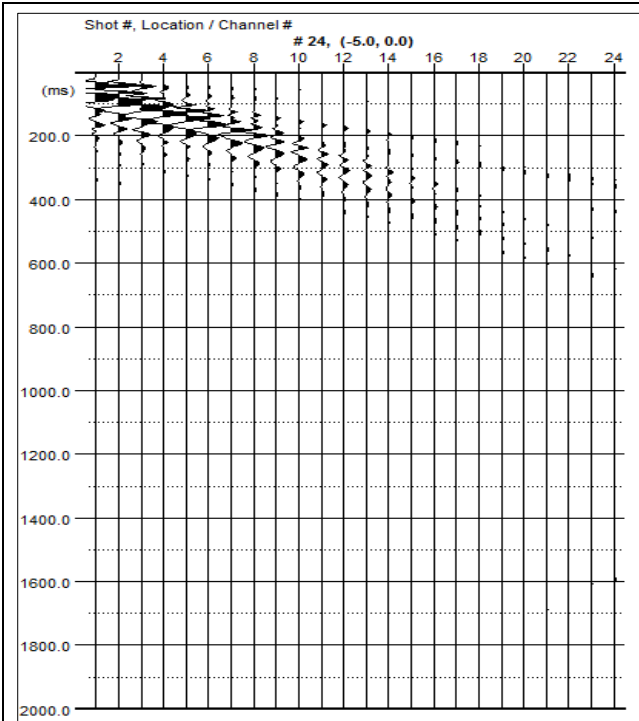

Sismogramma registrato durante le acquisizioni di microtremore sismico. In ascissa il numero dei geofoni, in ordinata il tempo (ms).

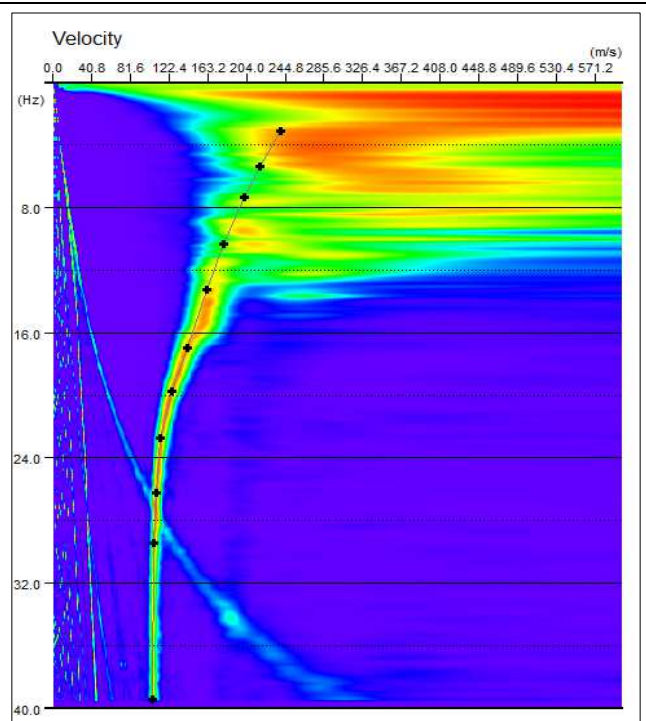

Spettro di potenza nel dominio $f-v$ e Picking della curva sperimentali delle onde R (croci nere).

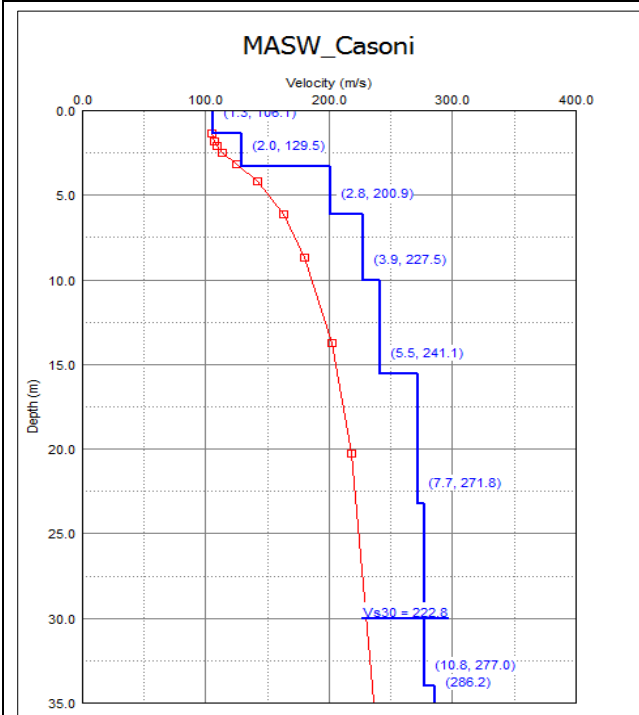

Modello di sottosuolo (1D) descritti in termini di V_s e spessore dei sismostrati (spezzata blu) e curva di dispersione sperimentale delle onde R (curva rossa).

Tabella di sintesi

n. Strato	Profondità letto (m dal p.c.)	Spessore (m)	V_s (m/s)
1	1.3	1.3	106.1
2	3.3	2.0	129.5
3	6.1	2.8	200.9
4	10.0	3.9	227.5
5	15.5	5.5	241.1
6	23.2	7.7	271.8
7	34.0	10.8	277.0
8	∞	∞	286.2

$$V_{s30} = 222.8 \pm 10\% \text{ [m/s]}$$


Sintesi dei parametri del modello di sottosuolo ottenuto e Valore di V_{s30} calcolato.

PROSPEZIONE SISMICA CON METODOLOGIA ATTIVA/PASSIVA MASW/Re.Mi.


Capoluogo, Comune di Malalbergo (BO) – 037035L9MASW9

n° tracce	Δx (m)	L tot (m)	Δt (ms)	T (s)
25	3,0	69,0	0,5/2,0	2,0/32,0


Δx : interdistanza geofonica; L tot: lunghezza profilo; Δt : passo di campionamento; T: durata registrazione.

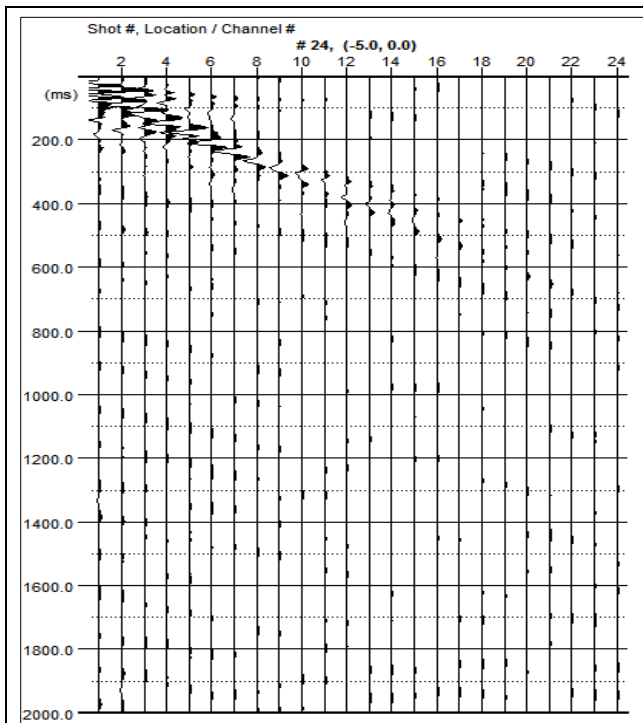

Sismogramma registrato durante le acquisizioni di microtremore sismico. In ascissa il numero dei geofoni, in ordinata il tempo (ms).

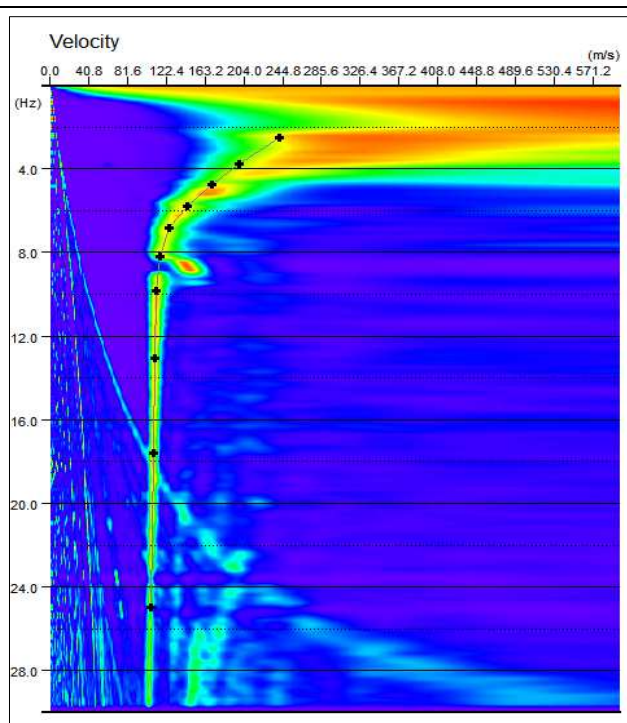

Spettro di potenza nel dominio $f-v$ e Picking della curva sperimentali delle onde R (croci nere).

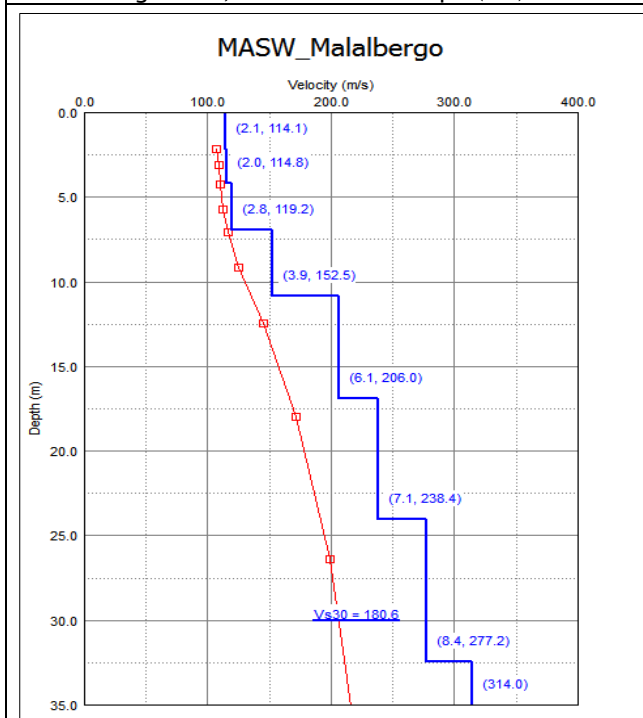

Modello di sottosuolo (1D) descritti in termini di V_s e spessore dei sismostrati (spezzata blu) e curva di dispersione sperimentale delle onde R (curva rossa).

Tabella di sintesi

n. Strato	Profondità letto (m dal p.c.)	Spessore (m)	V_s (m/s)
1	2.1	2.1	114.1
2	4.1	2.0	114.8
3	6.9	2.8	119.2
4	10.8	3.9	152.5
5	16.9	6.1	206.0
6	24.0	7.1	238.4
7	32.4	8.4	277.2
8	∞	∞	314.0

$$V_{s30} = 180.6 \pm 10\% \text{ [m/s]}$$


Sintesi dei parametri del modello di sottosuolo ottenuto e Valore di V_{s30} calcolato.

PROSPEZIONE SISMICA CON METODOLOGIA ATTIVA/PASSIVA MASW/Re.Mi.


Località Ponticelli, Comune di Malalbergo (BO) – 037035L10MASW10

n° tracce	Δx (m)	L tot (m)	Δt (ms)	T (s)
25	3,0	69,0	0,5/2,0	2,0/32,0


Δx : interdistanza geofonica; L tot: lunghezza profilo; Δt : passo di campionamento; T: durata registrazione.

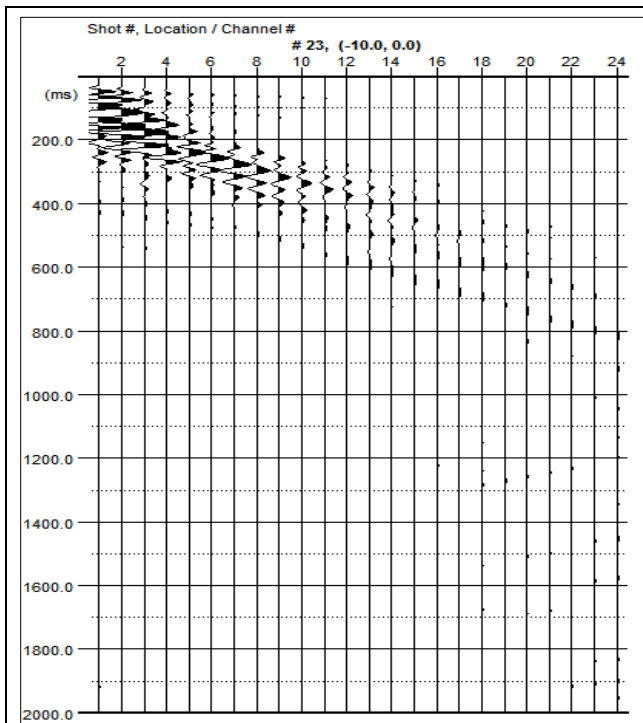

Sismogramma registrato durante le acquisizioni di microtremore sismico. In ascissa il numero dei geofoni, in ordinata il tempo (ms).

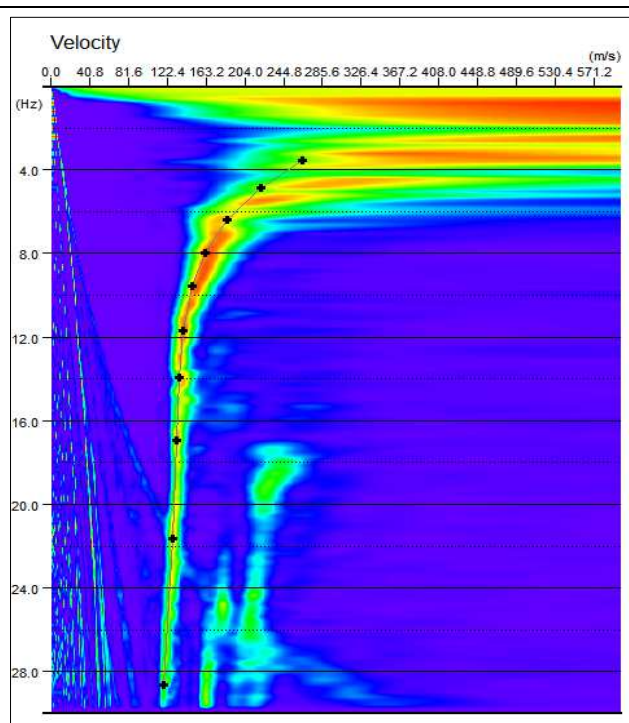

Spettro di potenza nel dominio $f-v$ e Picking della curva sperimentali delle onde R (croci nere).

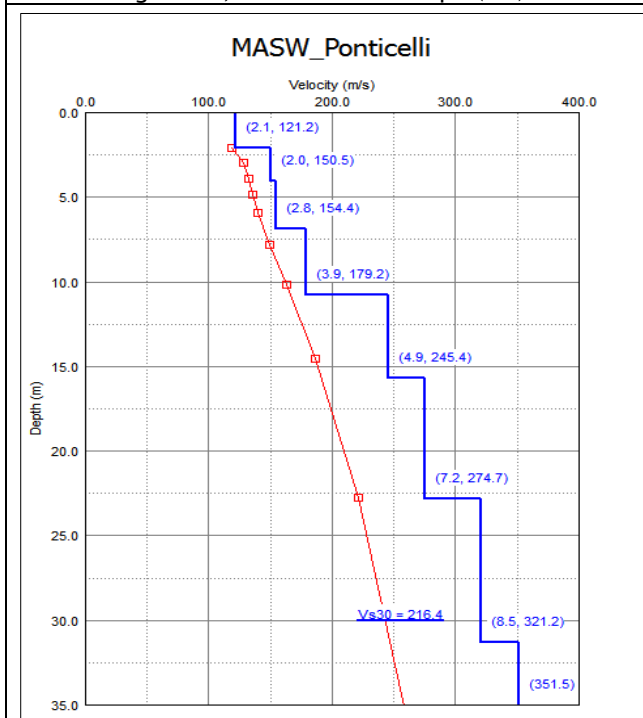

Modello di sottosuolo (1D) descritti in termini di V_s e spessore dei sismostrati (spezzata blu) e curva di dispersione sperimentale delle onde R (curva rossa).

Tabella di sintesi

n. Strato	Profondità letto (m dal p.c.)	Spessore (m)	V_s (m/s)
1	2.1	2.1	121.2
2	4.1	2.0	150.5
3	6.9	2.8	154.4
4	10.8	3.9	179.2
5	15.7	4.9	245.4
6	22.9	7.2	274.7
7	31.4	8.5	321.2
8	∞	∞	351.5

$$V_{s30} = 216.4 \pm 10\% \text{ [m/s]}$$

Sintesi dei parametri del modello di sottosuolo ottenuto e Valore di V_{s30} calcolato.