



DATA_SISMA, CORCHIA HVSR 5

Instrument: TEP-0059/01-10

Start recording: 27/06/12 11:00:16 End recording: 27/06/12 11:12:17

Channel labels: NORTH SOUTH; EAST WEST ; UP DOWN

GPS data not available

Trace length: 0h12'00". Analyzed 75% trace (manual window selection)


Sampling frequency: 128 Hz

Window size: 20 s


Smoothing window: Triangular window

Smoothing: 20%


HORIZONTAL TO VERTICAL SPECTRAL RATIO

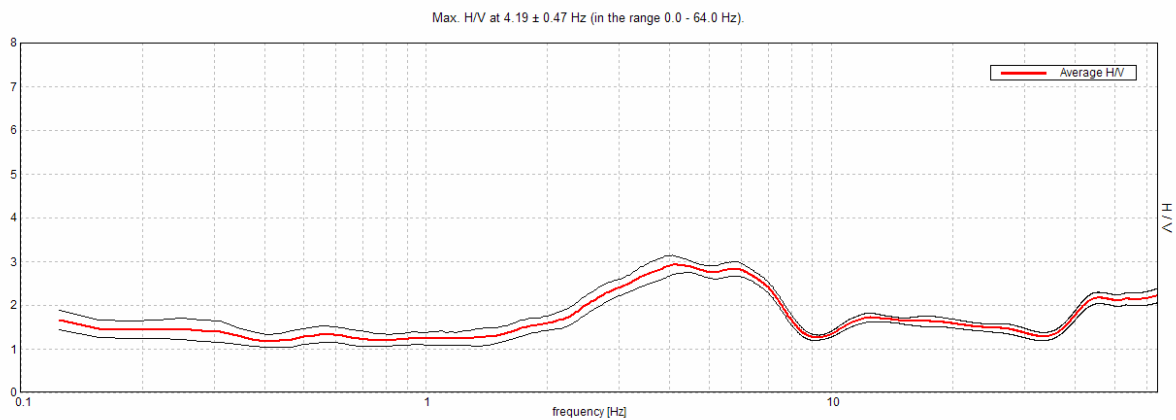

H/V TIME HISTORY

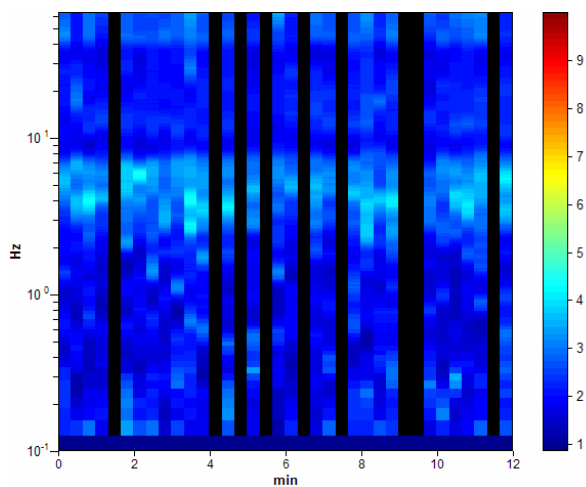


DIRECTIONAL H/V

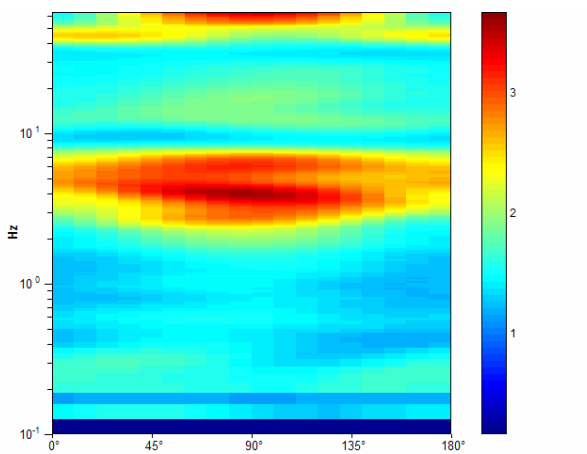




SINGLE COMPONENT SPECTRA

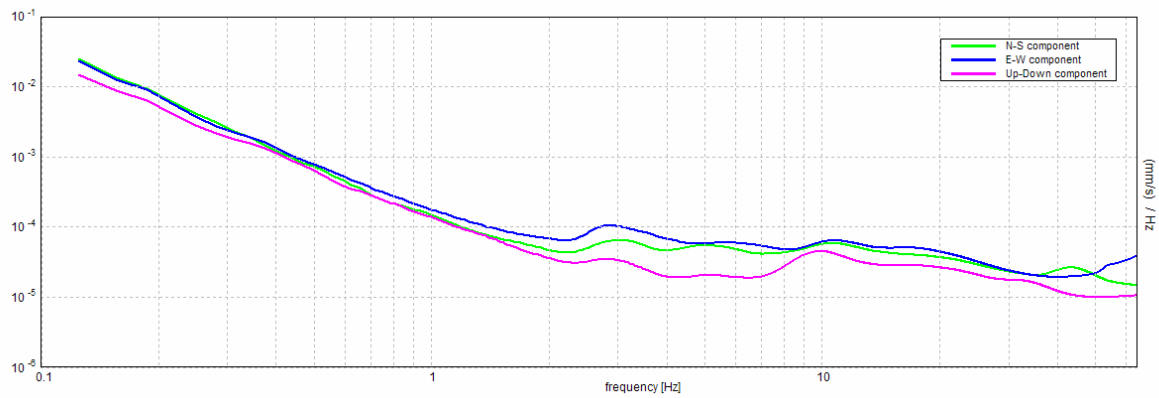


EXPERIMENTAL VS. SYNTHETIC H/V

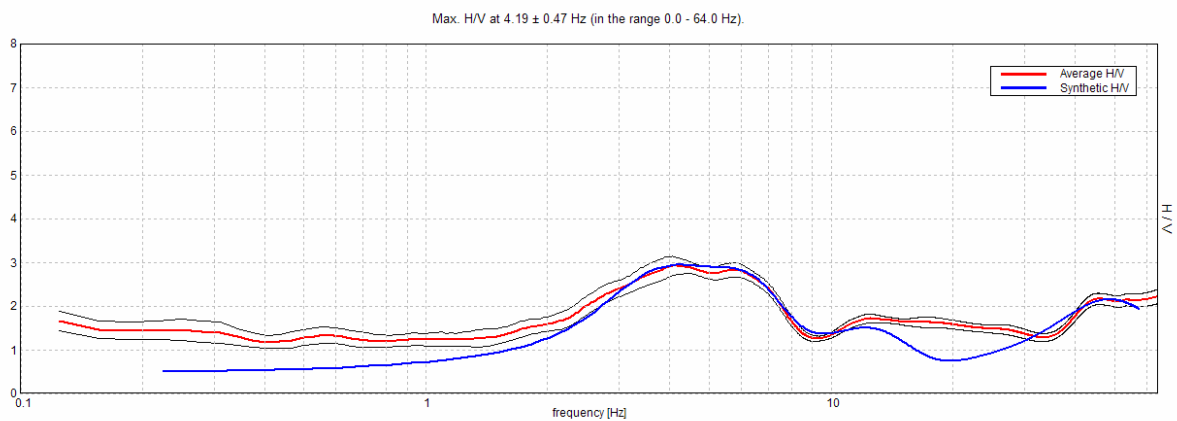

Depth at the bottom of the layer [m]	Thickness [m]	Vs [m/s]	Poisson ratio
0.20	0.20	65	0.35
0.70	0.50	130	0.35
4.20	3.50	200	0.35
8.20	4.00	360	0.35
11.20	3.00	370	0.35
17.20	6.00	390	0.35
27.20	10.00	660	0.35
43.20	16.00	680	0.35
53.20	10.00	700	0.35
inf.	inf.	930	0.36

Vs(0.0-30.0)=383m/s

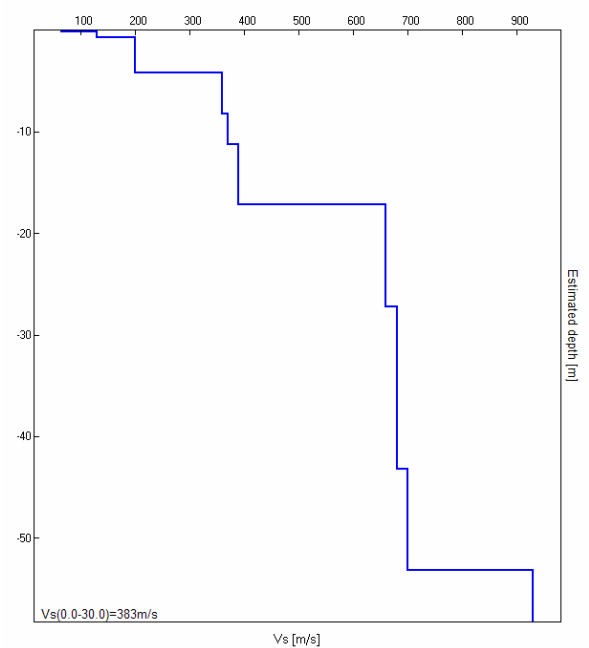



[According to the Sesame, 2005 guidelines. **Please read carefully the *Grilla* manual before interpreting the following tables.**]

Max. H/V at 4.19 ± 0.47 Hz (in the range 0.0 - 64.0 Hz).

Criteria for a reliable HVSR curve

[All 3 should be fulfilled]

$f_0 > 10 / L_w$	$4.19 > 0.50$	OK	
$n_c(f_0) > 200$	$2261.3 > 200$	OK	
$\sigma_A(f) < 2$ for $0.5f_0 < f < 2f_0$ if $f_0 > 0.5\text{Hz}$ $\sigma_A(f) < 3$ for $0.5f_0 < f < 2f_0$ if $f_0 < 0.5\text{Hz}$	Exceeded 0 out of 202 times	OK	

Criteria for a clear HVSR peak

[At least 5 out of 6 should be fulfilled]

Exists f^- in $[f_0/4, f_0] \mid A_{H/V}(f^-) < A_0 / 2$	1.688 Hz	OK	
Exists f^+ in $[f_0, 4f_0] \mid A_{H/V}(f^+) < A_0 / 2$	8.344 Hz	OK	
$A_0 > 2$	$2.91 > 2$	OK	
$f_{\text{peak}}[A_{H/V}(f) \pm \sigma_A(f)] = f_0 \pm 5\%$	$ 0.05387 < 0.05$		NO
$\sigma_f < \varepsilon(f_0)$	$0.22557 < 0.20938$		NO
$\sigma_A(f_0) < \theta(f_0)$	$0.0903 < 1.58$	OK	

L_w	window length
n_w	number of windows used in the analysis
$n_c = L_w n_w f_0$	number of significant cycles
f	current frequency
f_0	H/V peak frequency
σ_f	standard deviation of H/V peak frequency
$\varepsilon(f_0)$	threshold value for the stability condition $\sigma_f < \varepsilon(f_0)$
A_0	H/V peak amplitude at frequency f_0
$A_{H/V}(f)$	H/V curve amplitude at frequency f
f^-	frequency between $f_0/4$ and f_0 for which $A_{H/V}(f^-) < A_0/2$
f^+	frequency between f_0 and $4f_0$ for which $A_{H/V}(f^+) < A_0/2$
$\sigma_A(f)$	standard deviation of $A_{H/V}(f)$, $\sigma_A(f)$ is the factor by which the mean $A_{H/V}(f)$ curve should be multiplied or divided
$\sigma_{\log H/V}(f)$	standard deviation of $\log A_{H/V}(f)$ curve
$\theta(f_0)$	threshold value for the stability condition $\sigma_A(f) < \theta(f_0)$

Threshold values for σ_f and $\sigma_A(f_0)$

Freq.range [Hz]	< 0.2	0.2 – 0.5	0.5 – 1.0	1.0 – 2.0	> 2.0
$\varepsilon(f_0)$ [Hz]	$0.25 f_0$	$0.2 f_0$	$0.15 f_0$	$0.10 f_0$	$0.05 f_0$
$\theta(f_0)$ for $\sigma_A(f_0)$	3.0	2.5	2.0	1.78	1.58
Log $\theta(f_0)$ for $\sigma_{\log H/V}(f_0)$	0.48	0.40	0.30	0.25	0.20